

Chemical Structure of Bituminous Coal

Peter H. Given

Dept. of Fuel Technology, Pennsylvania State University, University Park, Pa.

Introduction

The purpose of this paper is to survey present knowledge of the structure of coals in such a way as to provide a useful background to consideration of the production of chemical by-products. In addition some deductions will be drawn from structural knowledge about the probable contribution made by different coal components and by different parts of the structure to the volatile matter evolved on carbonization. Since the survey has only this limited objective, no attempt will be made to treat the subject exhaustively; and since detailed, fully documented, reviews have appeared recently^{1,2}, a full bibliography is not provided.

Examination of a sample of coal with the naked eye or under the microscope reveals that the material is apparently heterogeneous. There are bands of different reflectance running through the coal, and even minute areas scanned microscopically show a variation of optical properties; moreover, there are regions showing various types of fossilized plant remains. These components have been classified in various ways, and there is no universally agreed system; moreover, the subject is complex since a large number of alleged components have been distinguished. The term "alleged" is used in recognition of the fact that the significance of a component can only be established to the satisfaction of coal scientists at large if it has been separated physically and shown to differ appreciably in chemical and physical properties and in carbonization behavior from material associated with it in the whole coal. The real significance of many components has not yet been established in this way.

For present purposes it will be sufficient to postulate that bituminous coals are composed of three major "maceral" groups, which, in the common European terminology are known as vitrinite, exinite and inertinite. The term "inertinite" refers to components inert in carbonization; "inert" does not imply that the materials undergo no chemical reaction, only that they do not soften or swell on heating and contribute little to the volatile matter. Vitrinite is quantitatively the most important maceral, accounting for probably 60-80% of most worked coals, and it is the material primarily responsible for the characteristic coking behavior of higher rank bituminous coals. Coals relatively rich in the other components are known, but they are rare in the U.S.A.; nevertheless, even in minor amount, they can make significant contributions to the properties of the whole coal.

In what follows, the structure of vitrinites will be considered first. So far as possible the conclusions stated will be based on work with pure macerals, but some evidence relative to vitrains (bright bands of coal seams, normally containing 80-95% vitrinite) will be used where it seems improbable that the character of broad qualitative conclusions could be altered by the presence of small amounts of petrographic impurity. After the consideration of vitrinites, available evidence on structural differences between them and other macerals will be reviewed; at this point some comments will be made on the sub-components of the main maceral groups.

The Structure of Vitrinites

It has long been believed that vitrainous coals are predominantly aromatic in structure. The partly aromatic nature of coals is established qualitatively by the presence of certain bands in their infra-red spectra. However, the fullest

and most convincing evidence on this point comes from the study of the scattering of x-rays by coals. The interpretation of the scattering data is a difficult and complex business, and no completely adequate treatment has yet been devised. The method most recently published³ makes use of a curve-fitting procedure, in which the scattering curve calculated for various hypothetical models is compared with the curve observed experimentally. Of the models tested, the one that gave the best fit required the supposition that in bituminous vitrinites a majority of the carbon was organized into aromatic nuclei containing on the average 2-3 fused rings. For reasons that need not be discussed here the published work does not permit any accurate estimate of the fraction of carbon atoms in such systems nor any information about the other carbon atoms. The indications from the x-ray work, and the study of infra-red spectra, are that the aromaticity is between about 60 and 85%, increasing with rank, though lesser figures are possible. Further work may alter this estimate but is unlikely to change much the sizes of the nuclei quoted above.

In view of its obvious importance, much ingenuity has been expended in trying to devise methods of calculating the aromaticity from such physical properties as density and refractive index by "physical constitution analysis". For what they are worth, the results are in accord with the figures just given.

Non-aromatic carbon must be presumed aliphatic, and indeed the infra-red spectra of vitrinites demonstrate that aliphatic material is present. J. K. Brown⁴ was able to estimate the ratio of aromatic to aliphatic hydrogen in a series of vitrains from the spectra, and his values have recently been confirmed (with a small revision towards higher values) by nuclear magnetic resonance studies^{5,6}. It appears that vitrains of carbon content between 80 and 90% have the ratio H_{ar}/H_{al} rising from about 0.20 to 0.50, that is between 80 and 50% of the hydrogen is attached to aliphatic carbon atoms. The proportion of hydrogen in methyl groups cannot be measured by infra-red methods, but the relative intensity of the methyl vibration at 1375 cm^{-1} indicates that these groups are rare compared with CH_2 . N.m.r. data confirm this⁶, and indicate a fair proportion of tertiary $\rightarrow\text{CH}$. The spectra show that in the lower rank coals, the aromatic nuclei are highly substituted.

Many workers have studied phenolic hydroxyl in coals, by a variety of methods (see refs. 1, 2 for a review). It is established that between 40 and 80% of the oxygen in bituminous vitrinites is present at this type of functional group.⁷ Most of the balance of the oxygen is in some form of strongly conjugated carbonyl.

Several groups of workers have investigated the dehydrogenation of hydroaromatic structures in coals, and it is now certain that much of the aliphatic hydrogen is attached to such structures rather than to alkyl groups or other forms of alicyclic rings^{9,10}. The proportion of hydrogen removeable by two different dehydrogenation reactions falls from about 30-40% at a carbon content of 82-84% to 12-25% at 89-90% C. These figures correspond to minimum fractions of carbon in hydroaromatic rings in the region of 30 and 12% respectively. These data, together with n.m.r. and infra-red spectroscopic results, indicate that in the average composition of the aliphatic part of coals, CH_n , n is considerably less than 2, at least for the lower rank materials. This implies, though does not prove, that very little hydrogen or carbon can be present in alkyl groups or non-hydroaromatic alicyclic rings (it should be recalled that there is no evidence of the presence of olefinic or acetylenic groups in coals, which could also lead to a low value of n).

The molecular weights of coals are not known; determinations with solvent extracts² give values between about 500 and 3000. Therefore each molecule must contain a number of aromatic nuclei, linked together by non-aromatic groups. Attempts to make a synthesis of all the above information^{2,10} show that it is difficult or impossible to suggest any type of molecular structure that does not employ the hydro-aromatic carbon as a means of linking the aromatic nuclei. The most obvious expression of this principle is the 1,2- and 1,4-cyclohexadiene ring present in the 9,10-dihydro-

phenanthrene and -anthracene molecules respectively, where two benzene rings are linked by two methylene groups which complete a third, non-aromatic, ring. Other possibilities have been discussed². The "depolymerization" experiments of Heredy and Neuworth¹¹ also strongly suggest that the aromatic nuclei are linked together by methylene bridges, though here there is no necessary implication that these constitute hydroaromatic rings.

We have therefore arrived at the following picture of the structure of bituminous vitrinites. Each molecule contains a number of aromatic nuclei containing from 1 to 5 or 6 fused rings, the majority containing 1,2 or 3 rings. Each aromatic nucleus contains few replaceable hydrogen atoms. The substituents are partly phenolic hydroxyl and carbonyl oxygen, and partly aliphatic carbon atoms that are disposed in such a way as to constitute hydroaromatic rings and to serve as linkages connecting the aromatic nuclei together. In addition there is a minor proportion of short alkyl chains and perhaps non-hydroaromatic alicyclic rings (the latter includes the cyclopentadiene ring system as found in indene and fluorene). Such molecules would be very markedly non-planar. As an illustration of what is meant by this description, Fig. 1 shows a segment of a hypothetical coal molecule.

It should be noted that on this view each coal molecule is a true statistical sample of the bulk material, in the sense that each contains all the known structural features in approximately the same proportions. The older view of coal structure as a kind of strawberry jam, containing lumps of graphitic material embedded in a continuous medium, the bitumen, therefore becomes meaningless. Furthermore, in the model proposed the aliphatic and aromatic parts are so intimately integrated in the molecular units that one cannot label one part as tar-forming and another as coke-forming.

Structure of Exinite and Inertinite Materials

The exinite or leptinite suite includes a group of components not derived, like vitrinite and fusinite, from woody tissue. The most abundant member of the group, about which most is known, is sporinite, the remains of plant spores (indeed, the name exinite is often used to mean only this type of material). Sporinite contains considerably more hydrogen, and less oxygen, than the associated vitrinite. It is less soluble in organic solvents, more resistant to oxidation, and has a lower aromaticity (see the excellent review by J. K. Brown¹² and references therein). A group of spore exinites from British coal seams was found to contain more hydroaromatic hydrogen (corresponding to a minimum fraction of hydroaromatic carbon equal to about 0.4) than the associated vitrinites; less phenolic hydroxyl was found, both as a fraction of the weight of coal and as a fraction of the total oxygen¹³. The aromatic nuclei are about the same size as those in vitrinites, but the mean interlayer spacing is larger¹², suggesting that frequent occurrence of naphthenic structures keeps the planes apart¹². It was concluded¹³ that sporinites probably contain the same type of molecular structure as vitrinites, but that the molecules are larger, less polar and more hydroaromatic.

Exinites have a highly characteristic behavior on heating. Of whatever rank, they soften at around 400° and acquire a fluidity much too high to be measured with a Giessler plastometer. Even 60% exinite concentrates have fluidities greater than 20,000 divs per minute¹⁴. They swell enormously to a thin fragile bubble structure, which is so weak that a dilatometer piston sinks and resolidification cannot be observed this way. The loss in weight in the volatile matter test is much greater for exinites than for vitrinites and is in many cases 70-80%.

Little is known of the other members of the leptinite suite. Resinite, the remains of plant resins and waxes, is widely distributed in small amount, and also appears to be hydrogen-rich and very fluid when heated. The other components, cutinite (from cuticles), alginite (found only in boghead coals) and sclerotinite (from fungal sclerotia) are probably of little importance for present purposes.

The inertinite group contains two major components, fusinite and micrinite.

Fusinite closely resembles charcoal; its carbon content is always over 91%, it does not show fluidity or swelling, it contributes little to the volatile matter¹², and chemically it is relatively unreactive¹⁵. Micrinites have appreciably higher carbon and lower hydrogen contents than the associated vitrinites, though the difference is not so extreme as it is with fusinites. The aromatic nuclei are larger than in vitrinites. Both micrinites and fusinites are virtually opaque to infra-red radiation, and so no spectra have been reported. Both macerals undergo substitution with N bromosuccinimide, a reagent specific for placing bromine on aliphatic carbon in the α -position to a double bond (e.g. the methyl groups in propylene or toluene); this suggests that at least some aliphatic material is present^{15,16} (see Table I). Both also contain some phenolic hydroxyl. Micrinites do not swell or become fluid on heating.

For convenient reference some properties of sets of macerals each separated from one seam are collected in Table I. Two German and four British coals are included; no corresponding data have yet been published for American coals so far as the author is aware. Data will be found in the Table that support the statements made above about differences in elemental composition, hydroxyl contents, etc. It will be noticed that the exinites associated with British and German vitrinites of closely similar rank differ considerably in yield of volatile matter.

Unfortunately reflectance data are not available for the samples quoted, and so some refractive indices are included as an indication of optical properties.

Chemical Changes on Heating

Little direct experimental evidence is available on this subject, but available information can be usefully supplemented by the results of experiments on models and by predictions from the type of structure believed to be present.

The phenolic hydroxyl content of bituminous vitrains drops sharply to low values when the coal is heated to 450-500°¹⁸. Preliminary experiments on two vitrains, using Peover's method with benzoquinone, suggest that the hydroaromatic hydrogen content also drops sharply in a similar or somewhat lower temperature range¹⁸. The infra-red spectra of vitrains heated to 400° shows little change, except that the aliphatic C-H and phenolic OH absorption are slightly weaker¹⁹. By 460° aliphatic CH is much weaker, and OH slightly so; the H_{ar}/H_{al} ratios of two vitrains of carbon contents 82 and 89% had reached 2.4 (values for the unheated coals were about 0.25 and 0.6 respectively, and for the higher rank coal heated to 400°, 0.8). By 550° both OH and aliphatic C-H are very weak, but the aromatic C-H bending frequencies at 700-900 cm.⁻¹ are still well-defined. Above this temperature the coals become opaque, owing no doubt to incipient graphitization. No significant changes in x-ray scattering are observed until a vitrain has been heated to 500°, at which temperature the growth of the aromatic nuclei begins to be noticeable²⁰. Between 500 and 1000° there is further continuous growth, the average layer diameter of one sample, for example, increasing from 7A° to 14A°. It will be recalled that the free radical content of vitrain chars²¹ passes through a sharp maximum at 500-550°, the maximum rate of volatile evolution occurs at about 450°, and electrical conductivity increases sharply (by many orders of magnitude) in the range 600-650°²².

Dryden and his co-workers have studied the primary products of the evolution of volatile matter from vitrains by two methods: (a) study of the chloroform-soluble material extractable from coals heated very rapidly to temperatures near 400°; (b) distillation or pyrolysis of coals spread in thin layers on a heated plate in a high vacuum, a condenser being placed just above the plate. They find the extract and distillate to have closely similar infra-red spectra, and to resemble the original coal spectroscopically much more closely than a tar. These materials appear to play an important part in producing fluidity and resolidification to a coke when a coking coal is carbonized. They conclude that the materials mostly exist as such in the raw coal and are only to a small extent products of decomposition. However,

Table I. Properties of Macerals separated from British and German Coals.

Colliery and Seam Source of data, ref.	Markham Main, Barnsley 13, 14, 15			Dinnington Main, Barnsley 13, 14, 15			Zollverein 12, 17			Aldwarke Main, Silkstone 13, 14, 15			Chislet, No. 5 13, 14, 15			Anna 12, 17		
	V	E	F	V	E	F	V	E	M	V	E	F	V	E	F	V	E	M
%C, d.a.f.	82.3	81.6	91.6	85.1	84.3	92.4	85.7	87.4	88.0	86.9	87.1	92.1	88.6	89.1	92.2	88.4	89.1	89.6
H	5.5	7.6	3.6	5.3	7.6	3.1	4.9	6.7	4.2	5.4	7.4	3.7	5.3	6.2	3.8	5.1	5.0	4.3
O	9.3	8.4	3.4	6.9	5.7	3.5	7.8	4.7	6.8	4.9	4.2	3.0	3.9	3.6	2.7	4.7	3.8	5.0
%O as OH	5.7	3.7	0.8	5.1	2.9	-	-	-	-	3.9	1.4	0.5	2.8	0.8	0.4	-	-	-
O ₂ /O total, %	61	45	13	74	52	-	-	-	-	80	31	12	72	20	10	-	-	-
V.M.	40.5	82	14	34.7	71	15	32	59	23	33	70	15	30.6	41	15	28	37	19
Density (He)							1.30 1.19 1.39									1.30 1.27 1.39		
Refr. index (5460A°)							1.84 1.67 1.95									1.90 1.82 2.01		
Atoms Br added/100C (N.Br-succinimide)	13			13						14 17 2.0 8.5								

Note: V = vitrinite, E = exinite, F = fusinite, M = micrinite.

they are thermally unstable, and in carbonization at a more normal rate of heating they would undoubtedly decompose in situ to a considerable extent.

The temperature of maximum rate of volatile evolution is about the same for exinites and micrinites as for vitrinites^{12,17}. Ladam and Alpern carbonized a vitrinite concentrate and an exinite concentrate from the same coal seam at 600° and made a detailed analysis of the volatile products by vapor-phase chromatography. They found the products from the exinite concentrate to contain much more aliphatic material, more benzene homologues, more side-chain-substituted aromatics and less phenols. This result is in accord with the differences in structure believed to exist between the starting materials, and implies that the process of thermal decomposition does not, at least in their conditions, blur the effects of differences in structure.

It is well-known that the C-O bond in phenols is considerably weaker than the C-C, and that the C-H bond in the aliphatic parts of hydroaromatics is weaker than aromatic C-H. It is therefore reasonable to suppose that when molecules of the type attributed to vitrinites are heated, the primary changes will be homolytic dissociation of OH groups and loss of hydrogen from naphthenic rings, the latter resulting in thermal aromatization. It is likely that in an assembly of large complex molecules of the type described, where the changes of configuration required by aromatization may be difficult, that some of the hydroaromatic bridges will split rather than dehydrogenate; this may be the means whereby the aromatic material found in tar is broken off the main structure. These various changes will produce in the first instance OH radicals and H atoms, and leave free radical centres in the main structure, which would initiate further rearrangement and decomposition.

It is well known that little molecular hydrogen is evolved from coals until temperatures near 600° are reached. The hydrogen released by thermal dehydrogenation at lower temperatures must be consumed in saturating free radical centres in the volatile matter and the residue.

These ideas receive some confirmation from a series of experiments on the pyrolysis of model substances reported by van Krevelen and his co-workers²⁵. These authors synthesized a number of polymers containing various substituted and unsubstituted aromatic nuclei linked and cross-linked by methylene bridges. They found that, on pyrolysis, unsubstituted hydrocarbon polymers showed a maximum rate of decomposition at about 500°, and split extensively at the bridge units, leaving little solid (coke) residue. On the other hand polymers containing naphthenic rings, or still more if they contained phenolic hydroxyl substituents, showed a maximum rate of decomposition at considerably lower temperatures and left a much greater amount of coke residue. They concluded that when substituents are present there is, competing with the normal depolymerization reaction, a direct condensation proceeding as a result of dissociation of the substituents, and the latter tends to produce molecular enlargement. In support of this suggestion of competing reactions they adduce the fact that when substituents are present the coke yield increases greatly with decreasing rate of heating.

There is one other factor that should be mentioned. The late D. H. Bangham pointed out²⁶ that volatile matter evolved inside a particle of coal may well have to diffuse in a mobile adsorbed film in fine pores to the outside; while so adsorbed it is exposed to surface forces that could promote secondary reactions and also could act as a lubricant in promoting fluidity. Since porosity varies with rank, passing through a minimum at a carbon content about 89%, the magnitude of these effects will also vary with rank.

There is no experimental evidence bearing on the chemistry of the pyrolysis of the inert macerals. From the nature of this structure one would deduce that some

stripping of peripheral groups would occur, permitting condensation with neighboring molecules, but little alteration of the basic skeletal structure. The behavior of inert macerals as seen with the hot stage microscope is beautifully demonstrated in the color film prepared by W. Spackman and his collaborators. Exinitic material can be seen to liquify and flow round grains of inertinite, the morphology of the latter remaining almost unchanged.

A Chemical Description of Carbonization

A synthesis of the information given above permits a fairly detailed description of the main chemical phenomena of carbonization. The first major change is a softening of the "volatile solids", in Dryden's terminology, which, it is suggested, represent the lower molecular weight, hydrogen-rich, fraction of the coal. This softening is accompanied by the initiation of the decomposition of this fraction, and perhaps also of the involatile residue, the primary step being dissociation of hydrogen from hydroaromatics, shortly followed by dissociation of OH. These chemical changes cause two principal secondary reactions, one leaving a more aromatic hydrogen-poor material and the other a breaking off of volatile partly aromatic fragments as a result of the destabilization of the main structure owing to radical formation in it. A limited amount of cross-linking may also occur, giving a more stable and less volatile residue. These various changes, initiated by dissociation of H and OH, are more or less complete by about 500-550°. By this stage, much of the oxygen has been stripped off and the aromatic nuclei have not grown much in size but the molecules are more highly cross-linked. Some of the free radical centres produced by decomposition remain as such, "trapped" in the carbon matrix.

At 600-650° enough energy is available to break a few aromatic carbon-carbon bonds, so that the carbon skeleton can rearrange and condense to larger polycyclic nuclei of lower H/C ratio, and hydrogen gas is released. These changes also permit the pairing of the odd electrons in the free radical centres. The dramatic change in electrical conductivity no doubt results partly from the growth of the aromatic lamellae, partly from the elimination of insulating material between the lamellae, and partly from a greater degree of order in their stacking.

These changes no doubt continue at a diminished rate at higher temperatures still, and some of the oxygen, nitrogen and sulfur is stripped out.


This description probably has some application to sporinites also. But it has been suggested that there may be an additional factor here¹³. The greater interlayer spacing in exinites and the less polar nature of the molecules will cause the intermolecular forces of adhesion to be weaker than they are in vitrinites. This may be an important cause of the greater fluidity of exinites and the facility with which volatile matter escapes. Moreover, it will change the balance between van Krevelen's competing reactions, that is, the direct breakdown and the condensation to larger units resulting from dissociation of H and OH. In any case the ratio of hydroaromatic hydrogen to hydroxyl is much greater in exinites than vitrinites.

Discussion and Conclusions

The relevance of the above information and speculation to the production of chemical by-products from coal will be discussed with reference to hydrogenation, carbonization, and other methods.

(a) Hydrogenation

It is possible by use of a carbon catalyst, an elevated temperature, and a high partial pressure of hydrogen, to cause hydrogenolysis of alkyl groups in alkyl aromatics without saturating the ring; for example:



Ideally, this is in effect what one would wish to do in the hydrogenation of coal; the hydroaromatic parts of the structure would be eliminated as methane and ethane and the individual aromatic nuclei would be released as a mixture of relatively simple phenols, hydrocarbons and perhaps quinones or quinols. However, if the 1,2-cyclohexadiene type of linking unit, as in 9,10-dihydrophenanthrene, were common, stable single linkages between aromatic nuclei would remain in the product. Thus for example dihydrophenanthrene itself would give diphenyl and ethane, whereas the isomeric dihydroanthracene would give benzene and methane.

There are of course practical difficulties in contacting solid coal with a solid catalyst. For this reason, and because of the complexity of coal structure, such selectivity of hydrogenolysis is improbable. It is more likely that partial or complete saturation of the aromatic nuclei will precede any extensive hydrogenolysis of the linking units. Once saturation occurs, we are left with an extended naphthenic structure in which there is nothing to distinguish between the linking and aromatic parts of the original structure (except perhaps some oxygen substituents and heterocyclic atoms).

Perhaps, then, from a chemical point of view the best hope of breaking down coal structure to useful products by hydrogenation is to proceed in two steps, first a catalytic addition of hydrogen to the aromatic parts, and then a cracking, perhaps with a conventional cracking catalyst in a high-boiling oil.

The above remarks should apply equally to exinitic material. In carbonization one needs, in order to make a good coke, an optimum fluidity and not a maximum. In view of the difficulties of reactions involving two solid phases, in hydrogenation the maximum fluidity is clearly desirable, and so the greater the exinite content of the raw material the better. Indeed it would be desirable, if economically feasible, to use a blend of a coal with a black durain or other exinite concentrate.

On the other hand the inert components are too graphitic to be at all readily hydrogenated and broken down, and inasmuch as they will tend to decrease fluidity are undesirable contaminants of the raw material for hydrogenation.

(b) Carbonization

Carbonization of coal is carried out in the U.S.A. almost entirely for the purpose of making coke, and it is doubtful how far the process can be modified merely to improve the yield or quality of by-products. However, since the purpose of this paper is to discuss the basic chemistry involved, this factor is ignored in what follows.

It seems likely that both the total yield of chemicals from coal carbonization and the content of useful materials will increase with the exinite content of the charge, even though in commercial operation the volatile matter is exposed to much secondary change. Since the yield of volatile matter from exinites is so much (50-100%) greater than that from vitrinites, the relatively small amount (10-25%) commonly found in whole coals charged to coke ovens can make a very significant contribution to the volatile matter collected. Moreover the differences in behavior between different coals of apparently similar rank may be due in part to differences in their content of sporinite and resinite. The inert macerals will decrease the yield, not merely because they are relatively inert diluents but also because they are likely to be efficient free radical traps in the early stages of the release of volatile matter.

Coking blends commonly contain the basic coal to provide the bulk of the coke matrix, a component designed to increase fluidity to the desired extent, and an inert diluent to increase the coke hardness. Clearly there are likely to be a range of three-component mixtures that will give the desired result. It is at least a theoretical possibility that one could select a mixture within the range such that inertinite is used as little as possible as an inert diluent and exinite-

containing material is used both to contribute fluidity and to increase the yield of by-products.

If still further departures from present practice can be considered, one might carbonize, perhaps in a fluidized bed, in the presence of additives. Additives could be gaseous and include steam and a little air, or be a solid and consist of a catalyst designed to assist the breakdown of volatile matter to simpler material immediately on release from the coal particles. In any case if one wishes to interfere with the carbonization mechanism in this or in any other way, one must obviously do it in the dissociation stage (380-480°) or earlier.

(c) Other Methods

At one time it was thought that coal might be like a polymer in containing a variety of monomer units linked together by a relatively weak bond, as in cellulose. This view can no longer be maintained; in so far as it is just to consider coal a type of polymer, the linking units are not weak but very strong. The hopes of finding a simple economically feasible means of breaking the structure down into useful chemicals as main rather than by-products are therefore small. The depolymerization of coal with the boron trifluoride/phenol complex, described by Heredy and Neuworth,¹¹ is a very interesting contribution to this problem and will no doubt be developed further.

The classical organic chemist's answer to the problem of breaking down a mixed aliphatic-aromatic structure is selective oxidation of the aliphatic parts. It has so far proved impossible to oxidize coal selectively in this sense, but in any case a range of aromatic acids will be the principal products; these may have practical applications, but necessarily only in a strictly limited field. The fluorination procedure described by Farendon and Pritchard²⁷ is another reaction that might give chemical products useful in a limited field.

Provided the bulk of the products could be sold at chemical rather than fuel prices, it might be possible to use exinite concentrates as raw materials for chemical processing, and they possess certain advantages. This is a possibility that should be explored further. The cannel and boghead coals are described as being largely exinite, but in view of their different origin it seems doubtful whether they are very similar to the exinite material associated with bituminous coals. However, they might be useful starting materials.

References

1. D. W. van Krevelen, "Coal", Elsevier, New York, 1961.
2. P. H. Given, in "Coal", by W. Francis, Arnold, London, 1961.
3. P. B. Hirsch, Phil. Trans., 252 A, 68 (1960).
4. J. K. Brown, J. Chem. Soc., 744 (1955).
5. J. K. Brown, W. R. Ladner and N. Sheppard, Fuel, 39, 79 (1960); J. K. Brown and W. R. Ladner, *ibid.*, 39, 87 (1960).
6. W. R. Ladner and A. E. Stacey, Fuel, 40, 295 (1961).
7. P. H. Given and M. E. Peover, J. Chem. Soc., 394 (1960).
8. M. E. Peover, J. Chem. Soc., 5020 (1960).
9. R. Raymond, I. Wender and R. Reggel, Science, 137, (Aug. 31), 681 (1962).
10. P. H. Given, Fuel, 40, 427 (1961).
11. L. A. Heredy and M. B. Neuworth, Fuel, 41, 221 (1962).
12. J. K. Brown, B.C.U.R.A. Monthly Bull., 23, 1 (1959).
13. P. H. Given, M. E. Peover and W. F. Wyss, Fuel, 39, 323 (1960).
14. G. W. Fenton and A. K. V. Smith, Gas World (Coking Section) 149, (May 2), 81 (1959).
15. P. H. Given, M. E. Peover and W. F. Wyss, paper presented to 4th International Conf. on Coal Science, Le Touquet, France, 1961; to appear Fuel, 1963.
16. W. F. Wyss, private communication.
17. C. Kröger, A. Pohl, F. Kuthe, H. Hovestadt and H. Bürger, Brennst. Chemie., 38, 33 (1957); C. Kröger and A. Pohl, *ibid.*, 38, 102 (1957). For further references to the work of Kröger and his co-workers see ref. 12.

18. P. H. Given and W. F. Wyss, unpublished observations.
19. J. K. Brown, *J. Chem. Soc.*, 752 (1955).
20. L. Cartz, R. Diamond and P. B. Hirsch, *Nature*, 177, 500 (1956).
21. D. E. G. Austen and D. J. E. Ingram, *Proc. Conf. "Science in the Use of Fuel"*, *Inst. Fuel*, London, p. A-39 (1958).
22. J. Sandor, *Proc. Conf. "Ultra-fine Structure of Coal and Cokes"*, B.C.U.R.A., London, p. 342 (1943).
23. I. G. C. Dryden and W. K. Joy, *Fuel*, 40, 473 (1961).
24. A. Ladam and B. Alpern, paper presented at the 4th Internat. Conf. on Coal Science, Le Touquet, France, 1961.
25. D. W. van Krevelen, H. I. Waterman and P. M. J. Wolfs, *Brennst. Chem.*, 40, 155, 189, 215, 241, 314, 342, 371 (1959); D. W. van Krevelen and H. W. den Hartog, paper presented to the 4th Internat. Conf. on Coal Science, Le Touquet, France, 1961.
26. D. H. Bangham, personal communication; W. Hirst, *Proc. Conf. "Ultra-fine Structure of Coals and Cokes"*, B.C.U.R.A., London, p. 35 (1943).
27. F. J. Farendon and E. Pritchard, *Proc. Conf. "Science in the Use of Coal"*, *Inst. of Fuel*, London, p. A-52 (1958).

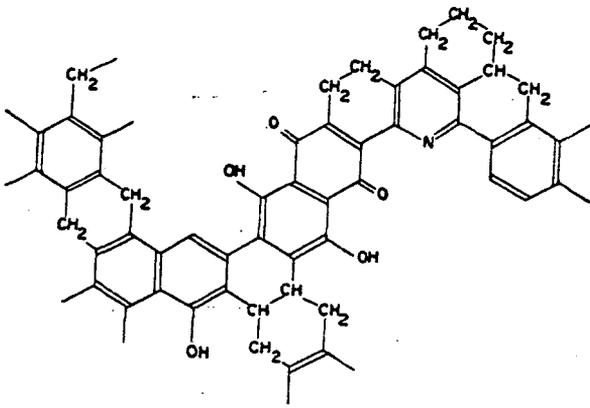


FIGURE 1. Hypothetical segment of a typical molecule in a bituminous coal.

THE COMPOSITION OF HIGH TEMPERATURE COKE OVEN TARS

Donald McNeil

The Coal Tar Research Association
Gomersal, Nr. Leeds
England

Introduction

Until 1882 crude gas works tar was the only type produced in Great Britain since, up to that time, coking plants were not equipped for the recovery of by-products. The by-product coke oven was first developed in France and introduced at about the same time in Germany, Belgium and England. Its use, coupled with the oil washing process for benzole recovery which was introduced by Carvès in 1884, was extensively adopted in Continental Europe but it took twenty years for the advantages of by-product coke ovens to be appreciated in England. Since then, however, coke oven tar production has increased year by year reaching a peak in 1957 of 1,250,000 tons. For those interested in statistics the following table shows the production of coke oven tar in the United Kingdom in the years 1950 - 1960.

Table 1
Production of Coke Oven Tar in the U.K. 1950 - 1960

Year	Tonnage Produced	% of all Tar Produced
1950	931,127	35.55
1951	977,379	35.64
1952	1,032,361	36.22
1953	1,056,767	37.10
1954	1,095,085	37.37
1955	1,101,294	36.76
1956	1,191,129	38.33
1957	1,252,079	40.27
1958	1,164,554	40.03
1959	1,096,399	40.40
1960	1,187,205	42.42

About 150,000 tons of crude coke oven tar is burned, the remainder is distilled for the manufacture of pitch, creosote, naphthalene, anthracene, some benzene, toluene, xylenes and naphthas and phenol and cresylic acid. It will be noted that coke oven tar accounts for about two-fifths of the total tar production in the U.K. The remainder in 1960 was made up of continuous vertical retort tar (42.85%), intermittent vertical retort tar (4.05), horizontal retort tar (5.42%), low-temperature tar (2.08%) and other types (1.17%).

Coke oven tar thus represents an important raw material whose chemical composition has been the subject of considerable study during the past sixty years. To date some 400 individual components have been isolated or identified and it is probably safe to say that at least that number are still unidentified. The vast majority of the components are present in very small amounts and can never be of any commercial interest. It is not the intention in this paper to recite a catalogue of the known components of high-temperature tars; many exhaustive compilations exist, one of the most comprehensive and complete being that compiled by K.C. Linepensel of Koppers Co. Inc.

Assays of Coke Oven Tars

Until recently, published analyses of coke oven tars took the form of distilling the crude tar under rather empirical conditions into arbitrary fractions which were intended to simulate the fractions obtained on commercial practice. Frequently these fractions were given non-specific names like "light naphtha", "light creosote", "carbolic oil" etc. and the content of major components such as naphthalene or phenol recorded were not those actually occurring in the crude tar but the amounts of the component (frequently impure) which crystallized from, or could be extracted from, one of these fractions. Since the distillation conditions and the degree of fractionation, the boiling ranges of the distillate oils and the method of analysis of these oils for individual components differed for each worker, it is impossible to compare the results of most of the published assays of coke oven tars and they contribute comparatively little to our knowledge of its actual chemical composition.

A few assays of coke oven tars which determine the actual amounts of commercially important components present have been published, for example the examination of American coke oven tar by Weiss and Downs¹ and of Australian coke oven tars by workers at the Coal Research Section of the Commonwealth Scientific and Industrial Research Organisation.² Assays of this type on a representative selection of U.K. coke oven tars have been carried out by The Coal Tar Research Association during the past eight years and it is these which are described and discussed in greater detail below.

The C,T,R,A. Assay Method

Preliminary work showed that the first stage of the method could be either accomplished by solvent extraction or by distillation without altering the yields of products except the pitch yield and the amount of tar acids and tar bases. It was shown that about one third of the tar acids are retained as complexes with tar bases in the residue on solvent extraction and are not

subsequently determined in the extract. Distillation was therefore chosen as the preliminary fractionation procedure and the conditions selected were those which, by trial and error, gave the same yield of medium soft pitch (70°C K & S) as was obtained from the same tar on continuous distillation in a Wilton pipe still.

5.5 kilos of the crude tar are placed in a cast iron pot and heated gently to 200°C to remove water and light oils. The latter are then fractionated on a 30 plate low hold-up column to give benzole (up to 100°C), toluole (100-125°C) and xylole (125-150°C). The residue from this distillation is added back to the dehydrated tar in the pot still and distillation continued at a rate of 14 g./minute until the vapour temperature reaches 358°C.

The oils from this primary separation step are then washed with alkali and acid to recover tar acids and tar bases respectively and the neutral oils fractionated on a 50 plate column at progressively reduced pressure to yield seven fractions and a residue as follows:-

Fraction 1	Naphtha fraction	Boiling Range	150°C/760mm. - 137°C/100 mm.
Fraction 2	Crude Naphthalene fraction	" "	137°C/100mm. - 145°C/100 mm.
Fraction 3	Methyl Naphthalene Oil	" "	145°C/100mm. - 155°C/50 mm.
Fraction 4	Diphenyl Oil fraction	" "	155°C/50mm. - 168°C/50 mm.
Fraction 5	Acenaphthene Oil fraction	" "	168°C/50mm. - 184°C/50 mm.
Fraction 6	Fluorene Oil fraction	" "	184°C/50mm. - 150°C/20 mm.
Fraction 7	Anthracene Oil fraction	" "	150°C/20mm. - 200°C/5 mm.
Fraction 8	Heavy Oil Residue		

Each of these fractions is then analysed by suitable chemical, spectroscopic and/or chromatographic methods for the quantitative determination of its major components.

The extracted tar acids are also subjected to high efficiency fractionation and the individual fractions analysed by gas-chromatography for phenol, cresol isomers and xylenols.

The practical details of this method have been published³ and are not given here.

The Results of Assays of British Coke Oven Tars

For the purpose of this paper it will be sufficient to set down the highest, lowest and mean values obtained for the content of major constituents in British coke oven tars. This is done in Table 2. For comparison the corresponding figures for some Canadian coke oven tars (average of 6) and one Australian coke oven tar carried out by the C.T.R.A. method are included.

Table 2

Amount of Components in British, Canadian and Australian Coke Oven Tars
(Results are given as wt. % on dry tar)

Source	British			Canadian			Australian
	Max.	Min.	Mean	Max.	Min.	Mean	
Benzene	0.42	0.124	0.252	0.297	trace	0.119	trace
Toluene	0.353	0.090	0.224	0.467	0.008	0.148	0.14
o-Xylene	0.071	0.020	0.037	0.133	0.005	0.038	} 0.15
m-Xylene	0.175	0.056	0.106	0.215	0.009	0.069	
p-Xylene	0.072	0.020	0.040	0.083	0.003	0.026	
Ethyl Benzene	0.05	0.005	0.02	0.04	0.01	0.02	
Styrene	0.067	0.020	0.038	0.046	0.008	0.020	
Phenol	1.15	0.14	0.57	0.98	trace	0.61	1.03
o-Cresol	0.84	0.10	0.32	0.51	trace	0.25	0.28
m-Cresol	1.00	0.16	0.45	0.84	trace	0.45	0.49
p-Cresol	0.70	0.07	0.27	0.52	trace	0.27	0.25
Xylenols	1.30	0.13	0.48	0.85	0.01	0.36	0.34
High-Boiling Tar Acids	2.09	0.31	0.91	1.51	0.14	0.83	0.45
Naphtha	2.66	0.52	1.18	2.21	0.15	0.97	1.03
Naphthalene	11.31	7.29	8.94	15.30	3.08	8.80	9.44
α-Methyl Naphthalene	0.86	0.60	0.72	1.08	0.37	0.65	0.58
β-Methyl Naphthalene	1.63	1.15	1.32	1.76	0.65	1.23	1.16
Acenaphthene	1.28	0.42	0.96	1.27	0.71	1.06	-
Fluorene	1.80	0.46	0.88	1.29	0.47	0.84	1.90
Diphenylene Oxide	2.00	1.40	1.50	-	-	-	1.00
Anthracene	1.38	0.52	1.00	1.01	0.47	0.75	0.68
Phenanthrene	8.8	2.3	6.3	3.00	2.14	2.66	2.32
Carbazole	1.73	0.58	1.33	1.23	0.32	0.60	0.35
Tar Bases	2.60	1.25	1.77	2.90	1.68	2.05	1.34
Pitch (70°C K & S)	63.9	49.5	59.8	70.85	52.4	63.5	62.4

The immediately striking feature of these figures is the variation they show in the content of particular components. Thus the content of phenol and cresols found in British coke oven tars can vary by a factor of ten; naphthalene content can be as high as 11% or as low as 7% and the amount of pitch produced on distillation may be less than 50% or greater than 60%.

The reasons for these variations in the amounts of individual components in coke oven tars are not at present well defined. Qualitatively it may be said that the nature of the coal, the design of coke oven, the carbonisation conditions used and the nature of the recovery system at the carbonising

plant all play a part. The generally higher level of phenanthrene and carbazole in British tars compared with the Canadian tars or the Australian tars is almost certainly to be attributed to differences in the coal structure. Certain British and Canadian tars, which show a low content of components boiling up to 230°C (benzene, toluene, xylenes, naphthas, naphthalene and phenol), are products of plants which operate their by-product recovery system in such a way that more of the volatile carbonisation products are scrubbed from the gas and less precipitated as tar. Generally speaking high naphthalene content, high pitch yield and low tar acid content go hand-in-hand, except for tars produced from low volatile coals e.g. Welsh steam coals. These are characterized by a high naphthalene and phenanthrene content but a low pitch yield.

It may be noted in passing that the tars produced in continuous gas-works vertical retorts are much more uniform in composition.

The large variations in the content of valuable components which can occur in coke oven tars is of more than theoretical significance. To the operator of coke ovens tar is tar, an unwanted by-product which he seeks to get rid of in any way he can. But to the tar distiller it is the raw material which must be transformed into products which can be sold at a profit. Changes in operation or in the blend of coal carbonised may occur at coke ovens which affect the nature of the tar produced. The first indication which the distiller has of these changes is when his fractionating column is thrown out of balance or when his naphthalene or tar acid production mysteriously drops. His first reaction is to suspect that his distillation and recovery plant have fallen in efficiency and he frequently spends some frustrating days - or even weeks or months - trying to locate non-existent faults.

These considerations suggested that there was a real need for some simple and rapid method of analysis and characterization of tars by which the tar distiller could check whether any major variation in his raw material had occurred.

Characterization of Tars

With this object in view a study of all tars in the storage tanks of British tar distillers was carried out some time ago. The idea behind this study was to analyse these tars by simple and, as far as possible, rapid methods and to see, by a statistical analysis of the results, which properties showed some correlation. It was hoped that, by selecting a few key properties with which other properties are correlated, some suitable characterization index could be derived.

In all 61 tars, of which 21 were from coke oven installations, were received and the analysis method, which has been described in detail,⁴ consisted in dehydrating the crude tar, determining the specific gravity and solvent analysis of the dry tar which was then subjected to a standard distillation to yield three distillate oil fractions, - 0-250°C, 250-300°C and 300°C - pitch and a 70 ± 2°C (K & S) residue. The distillate oils were analysed for tar acid content,

paraffin content and naphthalene content and the pitch was analysed for C/H ratio and subjected to a Mallison solvent analysis for its content of H- and M-resins.

Statistical analysis of all the results showed that the most useful index was the specific gravity of the dry tar. This gave a high degree of correlation with the pitch yield (in fact this relationship was used to determine the end point of the distillation to leave a pitch of the desired softening point) (Fig.1); it also showed a good correlation with the viscosity of the dry tar (Fig.2) and with the C/H ratio of the pitch. For the full range of tars (coke oven tars, continuous vertical retort tars, intermittent vertical retort tars, horizontal retort tars and blended tars) the correlation coefficients between specific gravity of the tar and paraffin content, specific gravity of the tar and phenol content and between phenol content and naphthalene content were statistically significant but, if the analysis was confined to coke oven tars, these correlations and that between the paraffins and tar acids or those between any of these properties and the naphthalene content were not significant as will be appreciated from the almost random distribution of points in Figures 3 and 4.

Although a characterization index was suggested based on three numbers indicating the level of dry tar gravity, phenol content of the 0-250°C distillate and the benzene insoluble content of the dry tar, this index is not of particular value in detecting changes in coke oven tar supplies to a distillery. It has proved of value in detecting changes in gas works carbonising practice and in anticipating changes in plant operation when the ratio of different types of tar in a blended feedstock is altered but it must be admitted that the problem of a simple characterization procedure for coke oven tars is still unsolved. The variations in properties of the coke oven samples examined are indicated in Table 2. This gives the maximum, minimum and mean values for the properties determined and also lists those properties for the coke oven tars with the highest and lowest phenol, paraffin and naphthalene contents (tars A1, A2, B1, B2, C1 and C2).

Table 2

Property	All Coke Oven Tars			Tar A1	Tar A2	Tar B1	Tar B2	Tar C1	Tar C2
	Max.	Min.	Mean						
Sp.Gr. of Dry Tar at 20°C	1.218	1.141	1.188	1.141	1.209	1.184	1.203	1.185	1.217
Viscosity of Dry Tar (Redwood No.1 secs at 60°C)	1.971	172	723	253	1247	382	546	438	1971
Wt.% Oils to 250°C	15.6	6.7	12.1	15.2	8.0	14.7	10.0	13.5	7.8
Wt.% Oils 250-300°C	12.2	9.3	11.30	12.2	9.4	9.7	9.7	12.2	9.6
Wt.% Pitch	69.2	52.2	61.0	52.2	66.8	59.3	62.9	59.1	68.6
% Phenols in Oil to 250°C	19.7	nil	7.8	19.7	nil	6.2	nil	9.2	9.5
% Paraffins " " "	2.3	nil	0.9	2.1	0.2	2.3	nil	1.8	0.8
% Naphthalene in Dry Tar	10.5	6.4	9.1	6.8	8.4	9.1	9.9	10.5	6.4
% Benzene Insols in Dry Tar	12.1	4.1	8.5	4.3	9.4	7.4	11.3	11.8	10.0

The Chemical Composition of Coke Oven Tar Distillate Oils

It is only recently, with the development of vapour chromatography, that it has been possible to obtain any information on the quantitative composition of tar distillate oils. The data so far obtained are, however, scanty and incomplete, mainly due to the limited number of reference compounds available for calibration of chromatographic columns.

Benzoles and Naphthas

Coke oven tar oils boiling up to 150°C which have been washed free from tar bases are remarkably uniform in composition. Their major components are benzene, 33-40%; toluene, 24-33%; m-xylene, 10-15%; o-xylene, p-xylene and styrene, about 5% each, ethyl benzene about 2% and thiophene and methyl thiophenes 1-2%. Non-aromatics which may occur in amounts up to 5%, are mainly methyl cyclohexane.

In the naphtha range (150-200°C) the main neutral components are indene, hydriindene, coumarone and pseudocumene with smaller amounts of ethyl toluene, mesitylene and hemimellitene and an amount of paraffins varying from a trace to 5%. In some samples n-propyl benzene is detectable and there is generally up to 15% naphthalene and some methyl naphthalenes depending on the efficiency of the fractionation procedure. The ratio of the components boiling up to 200°C varies considerably as is shown in Table 3 which lists the maximum, minimum and mean values.

Table 3

Composition of Coke Oven Coal Tar Naphthas (150-200°C boiling range)

Component	Wt. %		
	Max.	Min.	Mean
n-Propyl Benzene meta & para ethyl Toluenes	3.9	nil	0.6
Mesitylene	8.5	0.4	2.8
Pseudocumene	6.5	0.8	3.2
Hemimellitene	14.8	3.7	8.7
Hydrindene	6.9	trace	2.9
Indene	46.5	12.7	28.9
Coumarone	53.0	10.0	38.2
Paraffins	15.9	5.2	11.0
	10.0	nil	3.7

Naphthalene Oils

By far the major component of the tar-acid free coke oven oils boiling in the range 200-250°C is naphthalene which in well fractionated samples may be 65% of the tar-acid free oil. The remaining 35-50% is made up of thionaphthene 2-3%, α -methyl naphthalene 6-10%, β -methyl naphthalene 15-20%, quinoline 2-5%, paraffins, mainly dodecane 0-2% and amounts of dimethyl naphthalenes, dimethyl hydrindenes and acenaphthene.

Oils Boiling in the 250-300°C Range

The analysis of coke oven wash oils and light creosotes which have so far been carried out indicate that in this range the main constituents are, as would be expected, acenaphthene, diphenylene oxide and fluorene and these three components account for at least 50% of the fraction. The remainder is very complex with numerous minor unidentified compounds. Diphenyl and dimethyl naphthalenes make up 10-20% of this range and some of the trimethyl naphthalenes have been identified in it.







Anthracene Oils and Heavy Oils


















Phenanthrene, anthracene and carbazole make up on the average 75% of the coke oven tar fractions distilling from 300°C to 350°C. Phenanthrene is by far the major component, there being 6-8 times as much phenanthrene as anthracene; carbazole content is generally somewhat higher than that of anthracene. The remaining 25% consists of a large number of minor components which include tri- and tetra-methyl naphthalenes, diphenylene sulphide, phenyl-naphthalenes, acridine, methyl fluorenes and dimethyl diphenylene oxides.

Coke Oven Pitch

As the boiling range is ascended the complexity of coke oven tar fractions increases and their analysis becomes more difficult. Not only are the limits of volatility for fractionation reached but the value of analysis by vapour chromatography becomes increasingly limited by the lack of reference compounds. 45-55% of coke oven pitch can be separated from the remainder either by exhaustive extraction with petroleum ether or by vacuum distillation. These fractions have average molecular weights in the range 200-300 and appear to contain about one OH group per ten molecules and one CH_2 or CH_3 group for every three molecules. NH groups occur once in every ten molecules and =N- groups once per 8 molecules. Vapour chromatography on a high-temperature column shows the main hydrocarbon components to be fluorene, anthracene, phenanthrene, pyrene, chrysene, fluoranthene, benzfluorenes, benzfluoranthenes, benzpyrenes, perylene, benzperylene and picene.⁵ These compounds, together with brazan, dihydronaphthacene, triphenylene are the compounds which can be isolated most readily from coke oven pitch distillates or solvent extracts.

At this stage it is worth while setting down the major hydrocarbon components of coke oven tar in order of their complexity. This gives the following picture:-

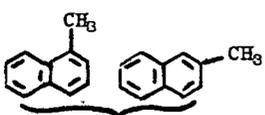Boiling Range	Average % of Tar	Major Components			
0 - 150°C	0.8			Single 6-membered rings	
		Benzene	Toluene		
150 - 200°C	2				Fused 6,5-ring systems
		Hydrindene	Indene	Coumarone	
200-250°C	12				Fused 6,6-ring systems
		Naphthalene	Methyl Naphthalenes		
250-300°C	8				Fused 6,5,6-ring systems
		Acenaphthene	Fluorene	Diphenylene Oxide	

Boiling Range	Average % of Tar	Major Components				
300-350°C	15				Fused 6,5,6- and 6,6,6- ring systems	
		Anthracene	Phenanthrene	Carbazole		
Pitch Crystalloids	32					
		1,2-Benzfluorene	2,3-Benzfluorene		Fused 6,5,6,6- ring systems	
						
		Fluoranthene	3,4-Benzfluorene	Brazan		
						Fused 6,6,6,6- ring systems
		Dihydronaphthacene	Chrysene	Pyrene	Triphenylene	
						Fused 6,6,5,6,6- ring systems
		2,3-Benzfluoranthene	7,8-Benzfluoranthene	8,9-Benzfluoranthene		
						Fused 6,6,6,6,6- ring systems
		1,2-Benzpyrene	4,5-Benzpyrene	Perylene	Picene	
						Fused 6,6,6,6,6,6- ring systems
		1,12-Benzperylene				

It would be expected that the remaining thirty odd per cent of pitch - the resinoid, C₂ and C₁ fractions - would extend this logical sequence, the number of fused rings in the main components increasing from six to a considerably high value. There is still, however, some controversy about the molecular weight of these fractions. Values obtained at C.T.R.A. by osmotic pressure measurements and by ebullioscopic determinations in benzene and pyridine vary from 400

1200 for fractions of the resinoids with an average value of about 550 and from 1000 - 1500 for the C₂ fraction (i.e. the benzene insoluble-pyridine soluble fraction). Other workers have recorded much lower values. These lower values we believe to be due to the presence of low molecular weight material in the fractions analysed either due to the imprecise nature of the fractionation method adopted, or more probably, to the incomplete removal of solvent from the recovered fractions.

If the results which Wood⁵ gives for the fractions of a coke oven pitch, separated by a precise and reproducible solvent fractionation, are accepted and subjected to statistical structural analysis in the same manner in which van Krevelen and his co-workers^{6, 7} have considered coal macerals, the conclusions are that the more complex fractions of coke oven pitch form a logical extension of the series formed by the distillate oil fractions.

In carrying out this analysis certain assumptions must be made. For example it is assumed that both -NH- (determined by potentiometric titration with perchloric acid), >N- (determined from total nitrogen content, less the -NH- groups) and -O- groups (determined by subtracting -OH groups from the total number of oxygen atoms in the average molecule) are present in ring systems. Hydrogen which cannot be accounted for as -OH , -NH- or aromatic -CH (determined from the infra-red absorption at 3050 cm^{-1}) are assumed to be equally divided between CH_2 and CH_3 groups. By van Krevelen and Chermis's⁶ "lift out and replace principle" an equivalent hydrocarbon structure may be calculated and the aromaticity (Ar) i.e. number of "equivalent" ring carbons divided by total "equivalent" carbons calculated. The number of rings in the average molecule can be derived from the formula:-


$$\text{Ar} = \left(1 - \frac{\text{H}}{\text{C}}\right) + \left[1 - \frac{2(\text{R}-1)}{\text{C}}\right]$$

and by subtracting the number of "equivalent" ring -CH_2- groups and the number of -CH_2- and -CH_3 groups from the total number of "equivalent" C atoms, a figure is obtained for the number of C atoms at the junction of fused rings.


The largest fraction - that soluble in heptane-dioxan - has a molecular weight of 220, an average formula of $\text{C}_{15.7}\text{H}_{11.7}\text{O}_{.21}\text{N}_{.22}\text{S}_{.07}$ and an "equivalent" hydrocarbon structure of $\text{C}_{17.1}\text{H}_{12.3}$. Its aromaticity is 0.98, the average number of rings per molecule is 3.6 and the number of ring joining carbon atoms per molecule is 5.3 which suggests an average degree of condensation similar to that found in pyrene. These results are consistent with what other data are available for the structure of pitch crystalloids.

The next major fraction which makes up 10% of the pitch is that soluble

in heptane and this has a molecular weight of 400, a molecular formula of $C_{29.3}H_{19.5}O_{0.93}N_{0.49}S_{0.14}$. It contains on the average 7 rings per molecule, an aromaticity of 0.923 with, on the average 2.13 CH_2 or CH_3 and 0.19 OH groups per molecule. The number of ring-joining atoms is 11.9 which for 28.6 equivalent ring carbons (C_R) is close to $\frac{C_R}{2} - 3$ and consistent with a structure such as I rather than II.




I



II

The next major fraction is that insoluble in methanol but soluble in benzene whose number average molecular weight is 910 and whose molecular formula is $C_{83.5}H_{41.0}O_{1.49}N_{1.04}S_{0.31}$. It has an aromaticity of 0.92 and the average number of rings in the molecule is 17.4. Ring joining carbons total 31 and the equivalent ring carbons 64.8. This again is more consistent with a "ring-chain", fairly open structure than a closely packed, highly condensed structure. Thus the seventeen ring aromatic system, III has 64 ring carbons and 32 ring joining carbons against 50 carbon atoms and 32 ring joining carbons for the highly condensed system IV.

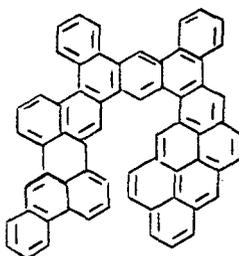

III



IV

It is, however, only right to point out that the two smaller fractions of the pitch amounting to 1.3 and 3.4% of the pitch respectively do not fit into the series; it is, however, believed that the analytical results on these are unreliable because of adsorbed solvents.

Tar Acids

65 to 70% of the tar acids extracted from the distillate oils are made up of phenol, cresols and xylenols, the distribution being as indicated in Table 4.

Table 4Composition of Phenols Extracted from Coke Oven Oils

Tar Acid	wt. % of Total		
	Max.	Min.	Mean
Phenol	30	14.3	19.0
o-Cresol	11.3	8.7	9.8
m-Cresol	16.3	13.5	14.8
p-Cresol	9.5	7.1	8.2
Xylenols and ethyl phenols	17.6	6.4	14.1
Higher Boiling Tar Acids	36.9	28.7	34.1

The higher boiling tar acids are a complex mixture of which the major constituents are 3-methyl-5-ethyl phenol, 2-methyl-4-ethyl phenol, 4-indanol, 5-indanol, 6-methyl-4-indanol, 7-methyl-5-indanol, α -naphthol and β -naphthol.

Tar Bases

No complete analysis of the bases extracted from the distillate oils of British coke oven tars is as yet available. According to the C.S.I.R.O. workers² the bases from an Australian coke oven tar contain 33.17% quinoline, 8.28% isoquinoline, 8.92% quinaldine, 0.91% 8-methyl quinoline and 3.21% 6-methyl quinoline.

The General Structure of Coke Oven Tars

The data given in this paper indicate that high-temperature coke oven tars are complex mixtures of aromatic and heterocyclic ring compounds. At the lower end of the boiling range single six-membered ring systems occur, with their corresponding hydroxy and alkyl substituents and the alkyl groups, while predominantly methyl, include ethyl and n-propyl side chains. Single ring compounds make up, however, less than 5% of tar. They are followed, as the boiling range is ascended, by fused six and five membered ring systems with their corresponding methyl and hydroxyl substituents; such systems, however, again make up less than 5% of the total. The next members of the ascending series - molecules containing two fused six membered rings, two six membered rings and one five membered ring, or three fused six membered rings - are major constituents making up some 30-35% of the tar. In this range naphthalene and phenanthrene are the major components with the other unsubstituted aromatic

compounds, acenaphthene, fluorene and anthracene, also prominent. Methyl and dimethyl derivatives of these aromatic hydrocarbons and the corresponding heterocyclic compounds occur as minor constituents. Oxygen compounds with the oxygen in a five membered ring are the most common heterocyclic compounds followed by tertiary bases with the nitrogen in a six membered ring system or as $-NH-$ in a five membered ring.

The same pattern is preserved in the pitch oils which make up about 30% of the tar. These consist predominantly of unsubstituted aromatic hydrocarbons containing from four to seven or eight fused rings and, in general, the ring systems are not fully condensed. Methyl and hydroxy substituents are rare but do occur and about ten per cent of the molecules contain a heterocyclic oxygen, nitrogen or sulphur atom in the ring system in this order of abundance. Compounds containing more than one heterocyclic atom are rare and, although polyphenyl compounds are present, they are very minor components. Compounds with partly substituted ring systems are also present in small amount but in most of the compounds containing ring $-CH_2-$ groups, the $-CH_2-$ is part of a five membered ring.

The most complex 30% of pitch represented by the pitch resins and the so called C_2 and C_1 fractions appears, from our present knowledge, to be a continuation of the series formed by the less complex and more volatile fractions and consists essentially of ring compounds containing from 8 to more than 20 rings in the molecule. The evidence, however, points to the fact that these more complex constituents have ring systems which are not highly condensed but rather consist of highly branched ring chain structures in which the majority of the rings are fused to no more than three other rings.

As further evidence of the relatively low degree of condensation in the ring structure of the molecules in pitch, may be cited the fact that the infrared spectra of pitch fractions shows much stronger bands at 750 cm^{-1} due to ortho substitution in the aromatic ring than at the other wave lengths characteristic of other types of substitution, indicating that there are a fair number of unsubstituted end-rings i.e. rings fused to only one other ring.⁵

The Composition of Tars and the Structure of Coal


It has been said that the products of carbonisation of coal have about as much resemblance to the original coal structure as the fragments of ash from a burning library bear to the original books. On the other hand tar accounts for 15% of the coal structure in low-temperature carbonisation and, despite the complexity of the reactions occurring in the carbonisation process, some inferences as to the nature of the coal "molecule" should follow from a study of the composition of the tar.

This approach has been made by Karr and his co-workers^{8 9} on the basis of the divergence between the determined distribution of isomers in low-temperature tars and the predicted thermodynamic and kinetic distributions at the temperature of carbonisation. Karr's argument is that the tar produced


in low-temperature carbonisation of coal may be regarded either from the standpoint of thermodynamic equilibria or chemical kinetics. If thermodynamic equilibrium has been achieved the proportion of various isomers will be that predicted by theory. If the residence time is too short to enable equilibrium to be achieved the most abundant isomers should be those predicted from the relative rates of formation. Isomeric distributions outside the range predicted by the combined thermodynamic and kinetic systems might indicate dependence on the coal structure.

An examination of the distribution of alkyl benzenes, alkyl phenols, phenyl pyridines, methyl quinolines and substituted anilines found in low-temperature tars showed very considerable differences from the distributions predicted on either thermodynamic or chemical kinetic considerations. Particularly striking was the relatively high proportion of para isomers in structures for which thermodynamic equilibria predicted a preponderance of the meta isomer and kinetic consideration a preponderance of the ortho compound. There seemed, therefore, some justification for the suggestion that these isomers derived from some common monomeric unit of the coal structure. One such unit which would account for the isomeric distributions found and whose occurrence when coal is carbonised would be biogenetically plausible is 4-n-propyl-2-methoxy phenol derived from lignin which has been subjected to the coalification process.

Prior to Karr's publications a similar idea had been put forward, although not published, by W. Waddington of The Coal Tar Research Association. His suggested structure of that part of the coal molecule from which tar is derived was that of a polymer consisting of a long paraffinic or conjugated chain from which at intervals were attached 4-alkyl-2-methoxy phenol units, substituted in the 6-position by other paraffinic or conjugated side chains. It is now generally agreed that Freudenberg's view of the biosynthesis of lignin from coniferin via the condensation of monomeric units of the structure




is probably correct, and although the structure of lignin has not been finally clarified, the production, on pyrolysis of fossilised lignin, of a unit having the structure V is not difficult to envisage.




The isomeric distribution of the xylenes and cresols in high-temperature tars is as expected from thermodynamic considerations with the meta compound predominating but in the xylenols the observed distribution in continuous

vertical retort tar differs from what would be expected from either thermodynamic or kinetic considerations. Thus the observed distribution is 33% 2,4-xylenol, 31% 3,5-xylenol, 12% 2,6-xylenol and between 7-9% of each of the 2,3-, 2,5- and 3,4-isomers. The thermodynamic distribution should give almost equal amounts of the 2,4-, 2-5- and 3,5-isomers while from kinetic considerations the 2,4- and 3,4-isomers would be expected to predominate. Shortening of the side-chains and loss of one or other of the oxygen containing groups would yield 2,4-xylenol or 3,5-xylenol from the proposed coal degradation product:-

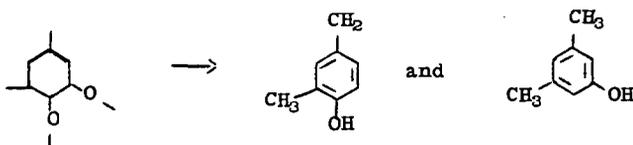


In the higher boiling tar acids from both low-temperature and high-temperature tars, 4-indanol and 5-indanol and their monomethyl derivatives predominate. These can be regarded as derived from the postulated progenitor thus:-

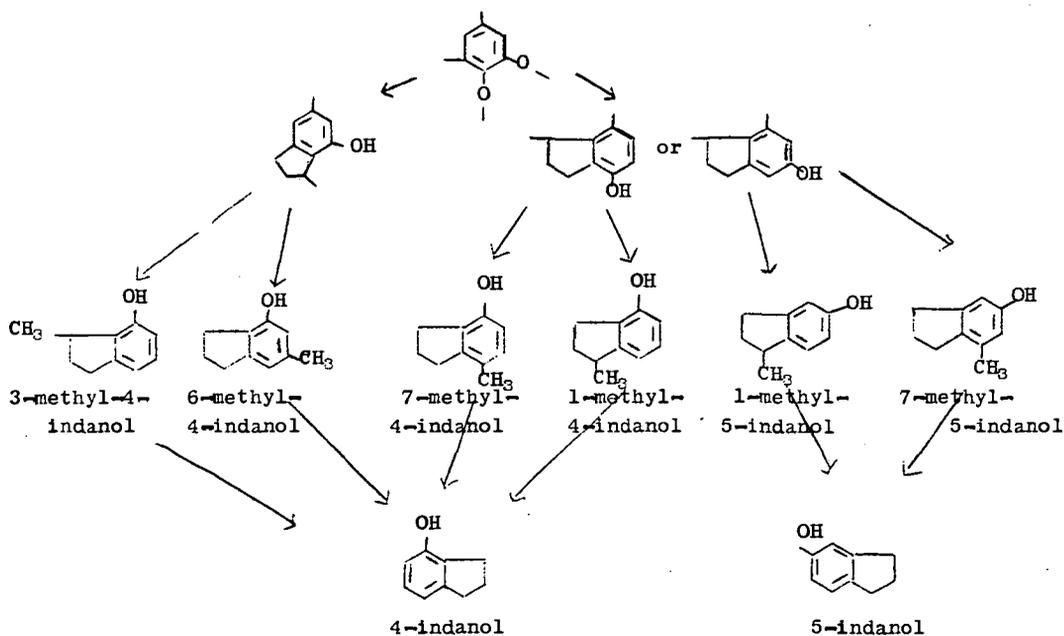


The distribution of the isomeric methyl indanols found in vertical retort tar is 18 parts 7-methyl-5-indanol: 12 parts 3-methyl-4-indanol: 8 parts each of 6-methyl-4-indanol, 7-methyl-4-indanol and 1-methyl-5-indanol: 6 parts of 3-methyl-5-indanol: 1 part each of 4-methyl-5-indanol and 6-methyl-5-indanol. It will be seen that this distribution, except for the absence of 1-methyl-4-indanol, is in conformity with the above scheme.

The trimethyl phenols found in vertical retort tars are restricted to the three isomers 2,3,4-trimethyl phenol, 2,3,5-trimethyl phenol and 3,4,5-trimethyl phenol. Also the isomeric distribution of the three trimethyl benzenes in tar is in the order 1,2,3 > 1,2,4 > 1,3,5 whereas both the thermodynamic and kinetic distributions would predict 1,2,4 > 1,3,5 > 1,2,3. The following scheme would explain these divergencies.

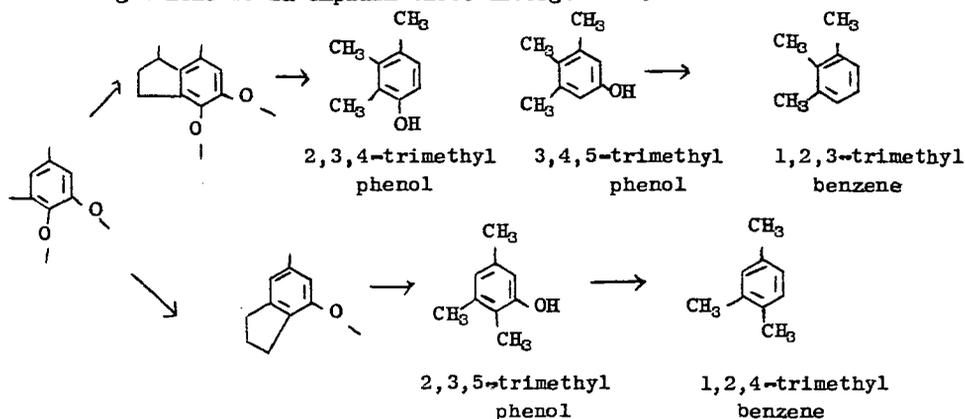

If ring closure yields six-membered rings the predominant products would be expected to be acenaphthene and 1,6-dimethyl naphthalene.

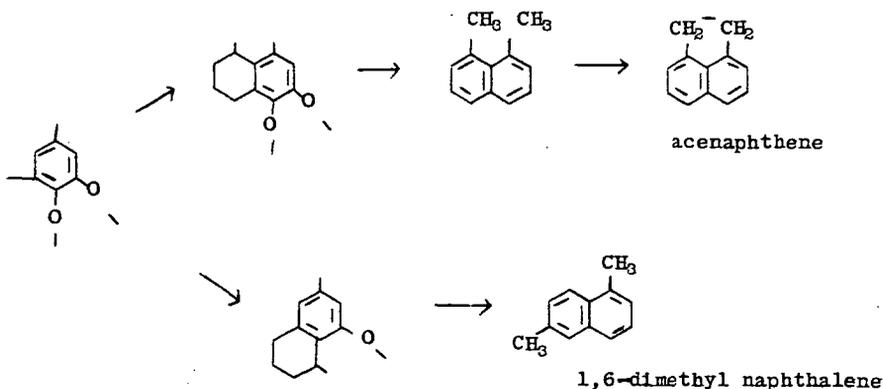

whereas experimental thermodynamic evidence favours the 2,6- and 2,7-isomers as the predominant forms. The analysis of the 250-300°C fractions of continuous vertical retort tar give the ratio of acenaphthene and dimethyl naphthalenes as acenaphthene 1.0, 1,6-dimethyl naphthalene 0.44, 2,6- and 2,7-dimethyl naphthalenes 0.35, 1,7-dimethyl naphthalene 0.19, 2,3-dimethyl naphthalene 0.16 and 1,5-dimethyl naphthalene 0.14.





It is appreciated that the evidence from the isomer ratios of tar components for a common precursor derived directly from the coal structure is very flimsy but it seems an interesting speculation and it is in this sense that it is mentioned in this paper. As more reliable data accumulate on the fine structure of tar fractions, particularly those from primary and low temperature tars, and better data become available, either from calculations or experiments of the thermodynamic distribution and kinetic distribution of isomers at the carbonisation temperatures, it should be possible to provide stronger evidence for or against this hypothesis. This possible approach to the problem of the chemical structure of coal should not be ignored.

- - - - -

References

- (1) Weiss, J.M. and Downs C.R., *Ind.Eng.Chem.*, 15, 1022 (1923).
- (2) Commonwealth Scientific and Industrial Research Organisation, Reference TC 24 "An Analysis of Coke Oven Tar from the Newcastle Steel Works of the Broken Hill Proprietary Company Limited" (1957).
- (3) McNeil, D. and Vaughan, G.A. Publication 438 of The Institution of Gas Engineers (1953).
- (4) McNeil, D., *J.Appl.Chem.*, 11, 90(1961).
- (5) Wood, L.J., *J.Appl.Chem.*, 11, 130(1961).
- (6) Van Krevelen D.W. and Chermin H.A.G., *Fuel*, 33, 79(1954).
- (7) Van Krevelen D.W., Chermin H.A.G. and Schuyer J., *Fuel*, 36, 313(1957).
- (8) Karr C., *J. Phys.Chem.*, 64, 462, 1960.
- (9) Karr C., Comberati J.R. and Estep P.A. *Fuel*, 39, 475(1960).

- - - - -

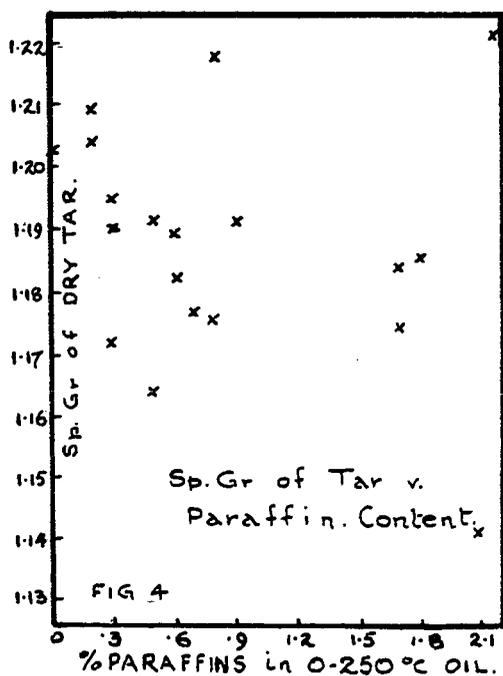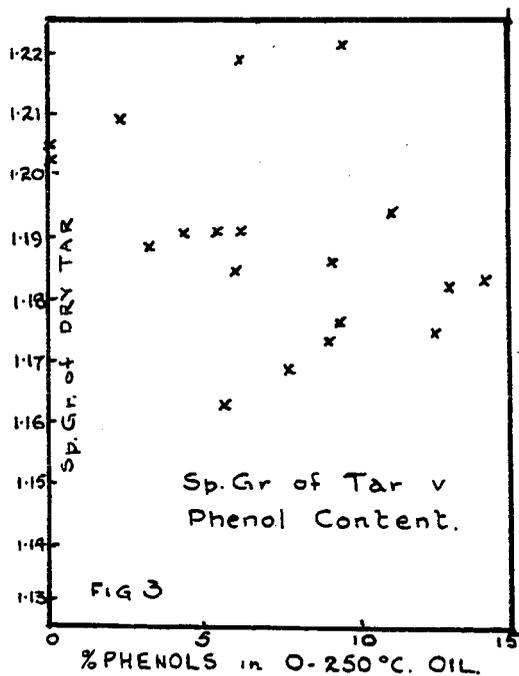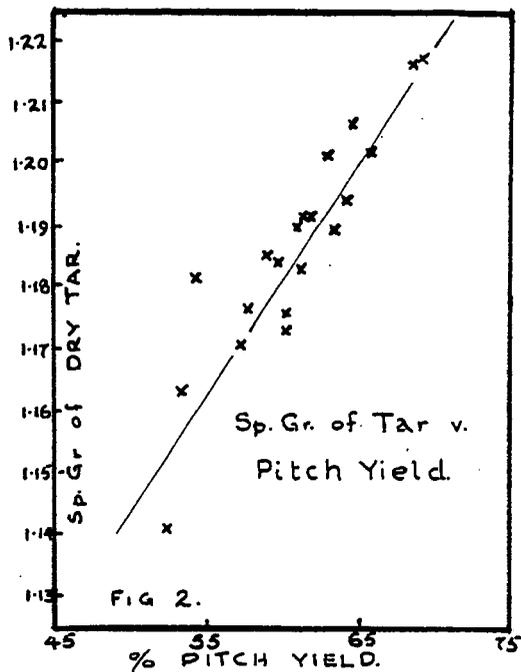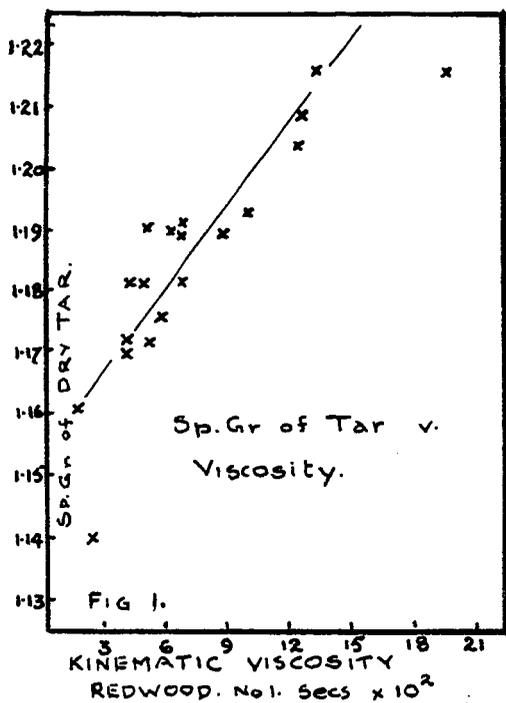

PRESENTLY LITTLE-USED BUT POTENTIALLY IMPORTANT
COAL TAR CHEMICALS

113.

Heinz-Gerhard Franck

Gesellschaft für Teerverwertung m.b.H.
Duisburg-Meiderich, West Germany

To date, about 400 of the myriad substances contained in coal tar have been definitely identified. This figure may seem small compared to the 10,000 estimated to be in tar but it probably includes all the components that will be used commercially as such since some of the constituents are present in extremely small amounts. The compounds which have been identified are either those which are present in the largest amounts or those which are relatively easy to isolate. It should be remembered that the composition of the lower boiling fractions is more completely understood than is that of the higher boiling fractions and of coal tar pitch--the distillation residue.

The composition of coal tar varies greatly. It is influenced by the type of coking coal employed, by the coking process and by the coking temperature. Further, tar undergoes certain changes in composition on distillation and the yield of various constituents is influenced by the distillation process used.

The development of gas chromatography has greatly facilitated the quantitative determination of coal tar constituents. It proved to be an almost ideal method of investigating tar and its fractions, and has generally superseded other analytical methods that were less accurate and more tedious. The following quantitative data on the occurrence of compounds in coal tar were largely obtained with the aid of gas chromatography. It should be noted that these data relate to high-temperature tar from soft coal of the Ruhr area processed by continuous vacuum distillation.

Figure 1 is a gas chromatogram of such tar. The individual peaks represent the most important constituents from indene (boiling point at one atmosphere: 183.1°C) to coronene (boiling point at one atmosphere: 525°C) in the order of their boiling ranges. As this is a schematic diagram covering the whole tar, not all the quantitatively important compounds are indicated by separate peaks. For instance, the peaks of 1- and 2-methylnaphthalene and also those of phenanthrene and anthracene coincide. A more detailed gas chromatographical analysis of the tar would separate these isomers. However, since gas chromatograms become less easily followed as the number of peaks increases, further diagrams will not be shown.

All together, the compounds identified to date make up about 55 per cent of the tar. In addition, tar contains about 2 per cent of relatively high-molecular-weight, soot-like compounds that cannot be dissolved or distilled--making it impossible to determine their composition by chemical methods. Thus it is apparent that only a small per cent of the number of compounds believed to be present in coal tar have been identified; those that have been identified represent a very significant portion of the tar.

According to present knowledge, a maximum of eleven compounds occur in coal tar in proportions greater than 1 per cent. Excepting the two methylnaphthalenes, all of them are unsubstituted, aromatic substances without functional groups. The three compounds present in the largest proportions are a binuclear, a trinuclear, and a quadrinuclear hydrocarbon.

Table I
Compounds Present in Coal Tar in Amounts
Greater Than 1 Per Cent

<u>Compound</u>	<u>Per Cent</u>
Naphthalene	10
Phenanthrene	5
Fluoranthene	3.3
Pyrene	2.1
Fluorene	2.0
Chrysene	2.0
Anthracene	1.8
Carbazole	1.5
2-Methylnaphthalene	1.4
Dibenzofuran	1.0
1-Methylnaphthalene	1.0

Until quite recently coal tar has been the only source of aromatic compounds. The slight extent to which this source has been exploited, however, is not widely known. Of the eleven most abundant constituents of coal tar, only two--naphthalene and anthracene--are being used on large scale as pure products for chemical processes. Contrasted with naphthalene, almost all of which is recovered and further processed, anthracene is used only to a limited extent in the chemical industry, although the amount has increased recently. This paper is not concerned, however, with compounds now used technically on a relatively large scale, but with the still untapped possibilities of coal tar. What coal tar constituents have been used widely in their pure form? Compared to the potential, the number is extremely small: besides naphthalene and anthracene, the list includes only phenol and its homologs (cresols and xylenols); pyridine and its homologs; and quinoline. With both phenol and pyridine homologs, mixtures and not pure products are frequently used. Nevertheless, it should not be concluded that little attempt has been made over the years to exploit the chemical potentiality of tar.

Most organic industrial processes for the manufacture of synthetic fibers, resins, pesticides, dyestuffs, drugs, etc. employ small, reactive building blocks from which the end products are synthesized. When coal tar components are small and reactive, as phenol and the pyridine bases, they meet these requirements and are used. But most of the compounds present in coal tar have relatively large molecules without functional groups and are quite inert chemically. This is why--what seems surprising at first glance--of the eleven most abundant constituents of coal tar, only two find wide application. Naphthalene, the chief constituent, is a noteworthy exception among the tar aromatics. It has become a valuable raw material because, fortunately, it can be oxidized in high yield to phthalic anhydride.

Conditions may seem less favorable when we consider the other aromatics, but it nevertheless would seem advisable to investigate the various possibilities offered by these raw materials which are available in such quantity. Certainly in recent years remarkable progress has been made in recovery techniques, so that today most of the products are available in purer grades and at lower prices than a few

years ago. Although this has led to a gratifying increase in sales, there is still no realistic comparison between the demand for most products and the quantities that could be produced.

Phenanthrene

Phenanthrene, the second largest constituent of coal tar, still has not been used to any appreciable extent though the phenanthrene skeleton underlies multitudinous hydroaromatic compounds widely distributed in nature and having great physiological significance. These natural products include: resin acids, morphine, sterols, bile acids, digitalis glycosides, sex hormones, and antirachitic vitamins.

There is an extensive literature on the chemical reactions of phenanthrene--such as halogenation, nitration, sulfonation, alkylation, chloromethylation, metalization, hydrogenation, and oxidation--with numerous uses proposed for the reaction products. Uses such as in the manufacture of resins, dyestuffs, drugs, plasticizers, and--as solid chlorination products--nonflammable electrical insulators and impregnants.

About 10 million tons of crude tar are distilled annually in the Western World. Assuming that this entire output has the same phenanthrene content as coal tar from the Ruhr area, or 5 per cent, and that about half of the phenanthrene could be recovered, the impressive quantity of 250,000 tons of phenanthrene yearly would be available. Separation on a large scale would, of course, result in lower production costs. Since phenanthrene has a higher boiling point than naphthalene and because it is more difficult to recover, it will always be more expensive, but if produced on the same scale as naphthalene, its price would be much lower than it is at the present time.

By analogy to naphthalene, it may be expected that phenanthrene can be oxidized to produce a bivalent acid, diphenic acid, which if cheap enough could be used in the manufacture of synthetic resins and plasticizers.

Diphenic acid is already being produced from phenanthrene, but so far there has been no success in developing a simple commercial process with a high yield for the conversion of phenanthrene into diphenic acid or its anhydride. The process currently followed gives not only diphenic acid but also considerable amounts of other oxidation products. Because of the poor yield and trouble with subsequent purification, diphenic acid is currently priced so high that it is used only for specialized purposes. However, much research is going into the problem, so there are good prospects that an economic process will be developed before long. As soon as one application of phenanthrene gains industrial importance, the price reduction will open up additional markets where phenanthrene has been unable to compete for price reasons.

Fluoranthene

While it is well known that large amounts of phenanthrene are available from coal tar, we seem to be less prone to realize that next to naphthalene and phenanthrene, fluoranthene is the most abundant coal tar constituent. Assuming the

conditions described for phenanthrene recovery, fluoranthene is available in the amount of 165,000 tons yearly as a raw material. The fact that organic chemistry treatises frequently ignore fluoranthene entirely or mention it only in marginal notes, shows how neglected the compound has been. Nevertheless, fluoranthene has an advantage over phenanthrene since, like naphthalene, it can be readily obtained from the appropriate fraction in a high purity, because the fluoranthene fraction has no significant content of material less soluble than fluoranthene or which forms mixed crystals with it.

Thus fluoranthene is offered in technical grade in a purity of 97-98%. As with phenanthrene, mass production could reduce its price considerably.

Coal tar is now usually processed by continuous distillation. The fractions recovered, in the order of their boiling ranges, are: water, light oil, middle oil (carbolic oil), naphthalene oil, wash oil, low-boiling anthracene oil, high-boiling anthracene oil, and pitch (distillation residue). Other closely cut distillate fractions yielding concentrates of other main constituents could be separated in the same way as the naphthalene fraction in the primary distillation. However, since the largest part of coal tar distillate is used as creosote, a broad complicated mixture of compounds, this type of distillation is not profitable or generally practiced.

Fluoranthene is a constituent of the high-boiling anthracene oil, and to a lesser extent of the pitch. To obtain the fluoranthene fraction, the high-boiling anthracene oil must be distilled further. This yields a number of other fractions, the most important one being the pyrene (boiling points at one atmosphere: pyrene, 393°C; fluoranthene, 383.5°C). Fluoranthene costs would be much lower if the pyrene fraction could also be used instead of being returned to the high boiling anthracene oil. (The co-product problem becomes more complex and important as the amount of the desired material in the tar becomes less. In practice, only the two most abundant constituents, naphthalene and phenanthrene, are free of this burden).

Compared to phenanthrene, the literature on the chemical reactions of fluoranthene is limited. Halogenation, nitration, sulfonation, hydrogenation, oxidation, and condensation with phthalic anhydride and acid chlorides are reported. Despite the symmetry of its molecule, fluoranthene is not chemically inert! Since fluoranthene is readily accessible in a high purity and is relatively reactive, why has it had no important practical application to date? Probably because the compound failed to attract the attention of chemists in the past and since the ease of its recovery was not fully appreciated. An examination of its reactions suggests fluoranthene could perhaps be used as a starting point for the synthesis of drugs and particularly of dyestuffs.

The price of fluoranthene would be the determining factor in the commercialization of any dye derived from it and the price could be reduced only if a certain minimum sales outlet were assured. As far as we know at the present time the oxidation type reactions are not as promising as with naphthalene or phenanthrene because no novel multicarboxylic acids have been made from it.

Pyrene

Unlike phenanthrene and fluoranthene, pyrene is already being used as a raw material on a very modest scale compared to the potential 100,000 tons a year which is available. The chemistry of pyrene has been extensively investigated (halogenation, nitration, hydrogenation, oxidation, sulfonation, condensation, etc.) A large number of condensation reactions have been reported and deserve special mention. These include not only condensation with phthalic anhydride but also with acetic anhydride, benzoyl chloride, diazoacetic ester, dichlorodiphenylmethane, glycerin, cyanuric chloride, and formylmethylaniline.

The possibility of combining the production of fluoranthene and pyrene (boiling points at one atmosphere: fluoranthene, 383.5°C; pyrene, 393.5°C) has already been discussed under fluoranthene. As in the case of fluoranthene, pyrene is found in both the high-boiling anthracene oil and pitch. However, recovery of pyrene is more complicated because its fraction has some slightly soluble components boiling close to pyrene, including 1,2-benzodiphenylene oxide and 2,3-benzodiphenylene oxide. These are troublesome and expensive to remove. This explains the fact that pyrene is not ordinarily offered in as high a purity as fluoranthene. The technical grades available have a pyrene content of only 90-95%.

It is difficult to forecast if pyrene, so far used mainly as a starting material for the synthesis of dyestuffs, will become important in other fields. With successful utilization of fluoranthene as a chemical raw material, the market outlook for pyrene would undoubtedly improve. Many possibilities for its use are currently barred by its high price. Even if pyrene and fluoranthene recovery are combined, however, pyrene production costs would be reduced only slightly because, as previously mentioned, it is harder to upgrade the pyrene fraction than the fluoranthene fraction.

Like phenanthrene, there are interesting oxidation products of pyrene, such as 4,5-phenanthrenedicarboxylic acid and 1,4,5,8-naphthalenetetracarboxylic acid.

Naphthalenetetracarboxylic acid would be a particularly promising pyrene derivative if there were a simple oxidation process available giving a high yield of the acid. Experiments directed to this end have not yet given reason for optimism.

Fluorene

Wash oil boils between 230°C and 300°C; fluorene, occurring in tar in about the same proportion as pyrene, has the highest boiling point of main constituents in this fraction. Acenaphthene and dibenzofuran (diphenylene oxide) boil slightly below fluorene (boiling points at one atmosphere: acenaphthene, 278.2°C; dibenzofuran, 285.1°C; fluorene, 297.9°C). It is, therefore, convenient to consider the three together. However, fluorene and dibenzofuran must be carefully separated by distillation because they form a continuous series of solid solutions which, of course, cannot be separated by crystallization techniques.

Formation of mixed crystals is common among the constituents of coal tar. Phenanthrene and anthracene, phenanthrene and carbazole, and chrysene and 1,2-

benzanthracene are other quantitatively important compounds which form a continuous series of mixed crystals characterized by a curve having no maximum or minimum between the freezing points of the pure components. The formation of mixed crystals between phenanthrene, anthracene and carbazole is the main reason that phenanthrene is more difficult to purify than naphthalene.

Fluorene is the first of the coal tar constituents discussed so far to have a reactive group: in this case the methylene group between the two benzene rings has highly reactive hydrogen atoms. In spite of numerous reactions described in the literature and numerous uses suggested, such as the manufacture of cleaning and wetting agents, textile auxiliaries, pharmaceuticals, disinfectants, pesticides, dyestuffs, liquid scintillators, and thermoplastic resins, all attempts to promote widescale development of fluorene as a chemical raw material have been unfruitful to date. Recent developments indicate that there may be an outlet in drug synthesis because pharmacological substances currently being tested have been obtained from fluorenone, a product readily prepared from fluorene.

Chrysene

Chrysene, the most abundant constituent of coal tar pitch, is also found in smaller amounts in high-boiling anthracene oil. Because of a high-boiling point (440.7°C at one atmosphere) and the extraordinarily high-melting point (255°C), the product is hard to recover in its pure form. The starting point for chrysene production is usually the distillate from the manufacture of hard pitch, though pitch coke oil from the coking of hard pitch is also rich in chrysene.

Provided that suitable applications can be found, there seems to be no reason why all of the compounds discussed up to this point should not be used on large scale industrially. There is, however, less chance for chrysene despite the fact that its occurrence in coal tar is about the same as that of fluorene and pyrene. Purification of chrysene is more difficult and the higher cost of the compound will be a serious handicap to its broad utilization. Chrysene derivatives have been used to some extent in ultraviolet filters and sensitizers.

Carbazole

Carbazole, quantitatively the most important heterocyclic constituent of tar was, until recently, sold in large quantities. It is recovered as a co-product in anthracene purification. It was used for the production of dyestuffs and pesticides.

When fused with polysulfide in butanol or roasted with polysulfide in the presence of organic bases such as benzidine, the 3-(4'-hydroxyphenyl)-aminocarbazoles obtained by the condensation of carbazole with p-nitrosophenol yield the sulfur dye-stuff, hydron blue R, or when N-ethylcarbazole is employed, hydron blue G. 2-Hydroxycarbazole-3-carboxylic-acid-p-chloroanilide has become familiar as the brown dyestuff, naphthol AS-LB. 1,3,6,8-Tetranitrocarbazole became important as an insecticide under the trade name, Nirozan.

Finally, through the production of poly-N-vinylcarbazole a plastic has been developed from carbazole having good dielectric properties, good chemical resistance, high softening point, and thermal stability. This product has found commercial use in the electrical industry (trade names for polyvinylcarbazole: Luvican and Pollectron).

Unfortunately, the use of all these interesting derivatives has declined considerably in recent years, and some manufacturers of dyestuffs now specify that the anthracene material supplied to them contain less than a certain amount of carbazole.

A prognosis of the market for carbazole is, therefore, difficult. There is reason for certain optimism about the future of carbazole because it is a co-product in the production of anthracene and it does have a number of significant uses. Nevertheless, carbazole sales can be restored only with the development of new uses.

1-Methylnaphthalene/2-Methylnaphthalene

The two monomethylnaphthalenes are present in tar in very considerable amounts, with 2-methylnaphthalene predominant. In high-temperature tar, the ratio of naphthalene to the monomethylnaphthalenes is about 4:1, the lower the coking temperature, the more this ratio shifts in favor of the methyl- and dimethylnaphthalenes.

The methylnaphthalene fraction is a constituent of the "wash oil". It is distilled after the naphthalene fraction before diphenyl and the dimethylnaphthalenes. Methylnaphthalene production, therefore, fits nicely into recovery of the other three.

Because of their ready accessibility the methylnaphthalenes have become more important recently, even though the quantities sold are still very limited. Many possible uses have been proposed for each isomer; but these frequently overlap uses for naphthalene. Since naphthalene is cheaper, it has an advantage over the monomethylnaphthalenes in these cases. The syntheses of 1-naphthylacetic acid serves to illustrate such competition between naphthalene and 1-methylnaphthalene. 1-Naphthylacetic acid, used as a growth promoter, can be made from 1-methylnaphthalene by chlorination, reaction with KCN and subsequent hydrolysis. It can also be made by the chloromethylation of naphthalene followed by the same reactions. The synthesis selected then becomes a matter of cost.

1-Methylnaphthalene has an unusually low freezing point (-30.6°C) which is lowered further in the technical grade by the presence of isomeric 2-methylnaphthalene. Because of this property and its high solvent power, the alpha isomer is used as a solvent and as a heat transfer oil. It can also be used as a carrier in the dyeing of polyester fibers, as a cetane-number indicator. It has been used for determining the theoretical number of trays in distillation columns. Other suggestions for use are as an extraction agent for sulfur, as a constituent of liquid dielectrics, and as a starting material in the manufacture of plasticizers, pesticides, plastics, and textile auxiliaries. However, these suggestions have not been developed to any significant extent.

The numerous uses which have been proposed for 2-methylnaphthalene, include the production of dyestuffs, textile auxiliaries, growth inhibitors, detergents, emulsifiers, and wetting agents. The beta isomer is of importance in that its 1,4-quinone is a starting product for the manufacture of Vitamin K.

Dibenzofuran (Diphenylene Oxide)

Dibenzofuran is the most abundant oxygen heterocyclic compound in coal tar. The analogy in composition and occurrence between dibenzofuran and carbazole, the most important nitrogen heterocyclic, is striking. The presence of dibenzofuran in the wash oil and the advantages of combining its production with that of fluorene and acenaphthene have already been discussed.

Dibenzofuran is the skeletal substance of morphine. The reactions of dibenzofuran (halogenation, nitration, sulfonation, methylation, hydrogenation, and condensation) are reported in the literature. Possible uses are also described, such as the manufacture of disinfectants, insecticides, wood and other types of preservatives, textile auxiliaries, synthetic resins, high-temperature lubricants, dyestuffs, and additives for candle mixes. Dibenzofuran has been used to some extent as a dyestuff intermediate. Because of its high thermal stability, the product is suitable for heat transfer media although its high melting point (+82°C) is an objection.

An interesting derivative of dibenzofuran is o,o'-biphenol (2,2'-dihydroxydiphenyl), obtained by fusion with caustic potash. This compound is used in the manufacture of disinfectants and pesticides.

Acenaphthene

The acenaphthene content of crude tar is about 0.5%. However, larger quantities may be found in coal tar distillates because acenaphthene is one of those few compounds which may be formed in tar during distillation. The amount formed in this way may be equal to that originally present and the net acenaphthene content of coal tar is about 1%, roughly the same as dibenzofuran. Like fluoranthene it is easily purified by crystallization of the appropriate distillation fraction and the technical grade is usually 97-98% pure.

The chemical reactions which result in the production of secondary acenaphthene are not completely understood. The most likely reaction would be the dehydrogenation of 1,8-dimethylnaphthalene but since this cannot be demonstrated quantitatively, it must be assumed that there are other compounds in coal tar which are converted to acenaphthene by heat.

Like pyrene, acenaphthene belongs to the class of aromatics that have been used as starting materials for dyestuffs, but on a scale which consumes only a fraction of that which could be produced.

By means of catalytic gas-phase dehydrogenation, acenaphthene can be converted to acenaphthylene, which can be easily polymerized with peroxide catalysts. Like co-polymers containing acenaphthylene, the polyacenaphthylenes are noted

chiefly for their good electrical properties and high melting points but have not yet attained practical importance. A high yield of naphthalic anhydride is obtained from acenaphthene by catalytic gas-phase oxidation. Naphthalic anhydride has been used chiefly in the manufacture of dyestuffs. At a lower price it could probably be used for the production of synthetic resins.

On the whole, the market outlook for acenaphthene is more favorable than for its two by-products, dibenzofuran and fluorene. To reduce production costs as far as possible, effort must be concentrated on finding uses for substantial quantities of all three compounds.

Indene

Indene, the lowest-boiling of the most abundant coal tar constituents, is the reverse of acenaphthene so far as recoverability is concerned. The primary indene content of tar is almost 1 per cent. But in counter-distinction to acenaphthene, the amount of which increases during distillation, the amount of indene is decreased because at high temperatures and in the presence of hydrogen it is easily converted into indan. The extent to which the indene content is reduced and indan formed depends on the type of distillation process; the longer and higher the temperature at which the tar containing indene is heated, the greater the reduction of indene content. Under unfavorable conditions, more than 50 per cent of the original indene content of the tar may be lost. Since indene is more valuable than indan because of its higher reactivity, the hydrogenation of indene is an extremely undesirable reaction.

Indene cannot be classed as one of those coal tar constituents which has no practical use at this time even though it is not isolated and used as such. Indene is the principal constituent of coumarone resins. These would more accurately be called indene resins.

Because of its relatively high freezing point--(-1.6°C) pure indene can be prepared from the appropriate distillation fraction by extreme cooling. However, in spite of the many uses proposed for it, pure indene is not important commercially.

In addition to the large volume constituents of coal tar so far discussed, there are many other materials available in reasonably large amounts, which likewise have not attained commercial significance. The most important of these appear in the following table.

Table II
Important Coal Tar Constituents

<u>Compound</u>	<u>Content of Coal Tar (Per Cent)</u>
Diphenyl	0.4
Indole	0.2
2-Phenylnaphthalene	0.3
Isoquinoline	0.2
Quinaldine	0.2
Acridine	0.6
Phenanthridine	0.2
7,8-Benzoquinoline	0.2
Thianaphthene	0.3
Diphenylene Sulphide	0.3

Diphenyl

The diphenyl-indole fraction occurs between the methyl- and dimethylnaphthalene fractions. Recovery of diphenyl and indole is conveniently combined with the methylnaphthalenes.

Diphenyl is well known as a constituent of heat transfer oils. The eutectic mixture of diphenyl and diphenyloxide is sold under the trade names "Dowtherm A" and "Diphyl".

Diphenyl is also used as a preservative; for example, citrus fruit wrappers are frequently impregnated with diphenyl. It should be mentioned too that diphenyl is the basic substance of the benzidine dyestuffs, though they are normally produced from other starting materials.

Contrasted with what could be produced, very little coal tar diphenyl is used commercially. Coal tar diphenyl is under a handicap because diphenyl is available from other sources. It is obtained as a by-product in the synthesis of phenol by the chlorination process and it can be made by the pyrolysis of benzene. The diphenyl market, therefore, is divided between that recovered from coal tar and that made synthetically.

Indole

Indole, the nitrogen analog of indene, is one of the most interesting constituents of coal tar. Separation of indole and diphenyl is not possible by simple distillation because the two compounds have vapor pressure curves which lie close together and also form an azeotropic mixture. The boiling point of the diphenyl-indole azeotrope is a few degrees lower than the pure products (boiling points at one atmosphere: indole, 254.7°C; diphenyl, 255.6°C). Separation of indole and diphenyl is achieved by taking advantage of the slight acidity of the imide group and isolating the indole from the diphenyl fraction via its potassium compound by fusion with caustic potash. Diphenyl then can be recovered from the indole-free oil by fractionation and crystallization.

Another method of separating the two compounds is by the addition of a third component, diethylene glycol. Azeotropic mixtures of diphenyl-diethylene glycol and indole-diethylene glycol boil twelve degrees apart; under normal pressure they boil at 230.4°C and 242.6°C respectively (uncorrected). In this case, the azeotropic effect is so pronounced that separation by distillation does not require particularly efficient columns.

Indole is used commercially in several fields of chemistry. As might be expected from its occurrence in nature as a constituent of jasmine and orange blossom oils, it has long been used as a perfume fixative. The extraction of indole from coal tar in a state of purity which satisfies the perfume manufacturers is a chemical achievement since even trace amounts of impurity will falsify the aroma.

Indole is a starting material for growth-promoting substances and for amino acids. 3-Indoleacetic acid (indole-3-acetic acid) is one of the first growth-promoters

used. It is known commercially as heteroauxin. One way of making it is by the condensation of indole with formaldehyde and hydrochloric acid followed by condensation with potassium cyanide and hydrolysis of the resulting nitril. Alpha-amino-3-indole-propionic acid, known as tryptophane, is an integral component of many types of protein and one of the vital amino acids. 3-(Dimethylaminomethyl)-indole (gramine), obtained by a Mannich Reaction of indole with formaldehyde and dimethylamine, is an intermediate in the synthesis of tryptophane. Tryptophane is made by reacting gramine with acetaminomalonic ester and subsequent saponification.

Although the quantity of indole used is still small, improvement in the recovery process in recent years has resulted in steadily increased sales. Possibilities for indole are not at all exhausted with the uses mentioned. Interesting intermediates for dyestuffs and drugs can be made by reacting the hydrogen atom attached to the nitrogen. Of course, the relatively small amounts of indole in coal tar and the complicated methods for extracting and purifying it will never permit a price comparable to mass-volume products, but it is hoped that the recent advances in the preparation of indole will lead to a greater use of this interesting compound.

2-Phenylnaphthalene

Unlike indole, 2-phenylnaphthalene is a substance about which little can be said. Recently it was found that this compound, formerly classed among the rare constituents, actually is rather abundant in coal tar and can be recovered in relatively large amounts. The 2-phenylnaphthalene fraction boils below fluoranthene, so its recovery must be combined with that of fluoranthene and pyrene. Since there is no demand, 2-phenylnaphthalene is presently produced only in laboratory quantities. If a demand should develop the methylphenanthrenes, which boil below phenylnaphthalene, would become more accessible. There are considerable quantities of these in tar.

Isoquinoline/Quinaldine

As already mentioned, the only coal tar bases presently being used to any extent commercially are pyridine, pyridine homologues and quinoline. The problem of separating tar bases from their co-products is even greater than in the case of the neutral hydrocarbons. Crude bases are extracted from the appropriate distillation fraction by means of mineral acid from which they are subsequently liberated by the addition of caustic soda. Because of the complex nature of tar, distillation fractions do not contain only the particular tar base desired. Further, the formation of azeotropic mixtures between the hydrocarbons and the tar bases causes the latter to be distributed over a broad distillation range. Thus the extraction process invariably yields fractions which are mixtures of several compounds.

Isoquinoline and quinaldine are the most important compounds which occur with quinoline in the quinoline fraction. Since they boil above quinoline they occur in the distillation residue from which they could be recovered if a demand for them were to develop.

Table III

	<u>B.P. at Atmospheric Pressure - °C</u>
Quinoline	237.3
Isoquinoline	242.8
Quinaldine	246.9

There is extensive literature on the chemical reactions of isoquinoline and quinaldine. Isoquinoline is used as an auxiliary solvent in dyeing and as a starting product in the preparation of isoquinoline red and other cyanine dyestuffs, photographic sensitizers, drugs, pesticides, and vulcanization accelerators. Quinaldine can be used for similar purposes. The most important quinaldine dyestuffs include quinoline yellow, quinoline red, and ethyl red, as well as sensitizing dyes. Quinaldine can also be used as an inhibitor for metals and as a seed disinfectant. Although both these compounds could be produced in considerable volume, none of the uses has reached significant size.

Acridine Phenanthridine 7,8-Benzoquinoline

The three most important and most easily recovered tar bases in anthracene oil are acridine, phenanthridine, and 7,8-benzoquinoline.

Acridine is the best-known and occurs in the largest amount. None of the three bases has as yet been used on large scale, although interest in acridine has been increasing recently.

Acridine is in point of fact the base of numerous dyestuffs and drugs; but acridine dyestuffs are usually manufactured from 1,3-diaminobenzene and aliphatic or aromatic aldehydes. Even the syntheses of such well-known acridine derivatives as the drugs Trypaflavin (3,6-diamino-10-methylacridinium chloride) and Rivanol (2-ethoxy-6,9-diaminoacridine) do not usually involve acridine.

The extent to which 7,8-benzoquinoline occurs in coal tar has only been realized recently. Its only use at the present time is in the separation of meta and para cresol in gas chromatography. As with acridine, several drugs can be derived from phenanthridine; for example, quaternary salts of diaminophenanthridinium series have good trypanocidal properties.

Because of limited demand and the resulting high costs of producing very small batches of these compounds, the prices of acridine, phenanthridine, and 7,8-benzoquinoline are still high. Production on a larger scale--and the amounts of raw material are very adequate for this--would reduce costs considerably.

Thianaphthene Dibenzothiophene (Diphenylene Sulfide)

Thianaphthene and dibenzothiophene are the most abundant sulfur compounds found in coal tar. Thianaphthene is recovered with naphthalene, and the two can be separated only with difficulty because of their close boiling points (boiling points at one atmosphere: naphthalene 217.9°C; thianaphthene, 218.8°C). The formation of mixed crystals further complicates the separation.

The separation of phenanthrene and dibenzothiophene, the sulphur bearing compound that occurs with it, is not as difficult. The difference in boiling points is greater--(331.4°C; phenanthrene 336.5°C) and separation by distillation is more effective. Since dibenzothiophene distills just prior to phenanthrene, the limited market for phenanthrene has restricted the amount of dibenzothiophene recovered.

Both thianaphthene and dibenzothiophene could be recovered from coal tar in substantial amounts but it must be remembered that the cost would be high even if they were recovered on large scale.

Up to the present, very little use has been found for these two compounds. Thianaphthene has been used to some extent in the manufacture of drugs. Other proposed uses are the production of thioindigoid dyestuffs and herbicides from thianaphthene and preservatives with a fungicidal and bactericidal effect from dibenzothiophene. None has practical significance.

Besides the substances which have been discussed there are numerous other compounds that can be obtained from coal tar in relatively large quantities if needed. However, it should be remembered that the recovery and purification problem becomes more complicated as the concentration of the desired compound in the tar decreases. The economics of the processes are affected accordingly.

Attention is drawn to the dimethylnaphthalene fraction, which constitutes about 2 per cent of the tar and lies between the diphenyl and acenaphthene fractions. To date, the following nine dimethylnaphthalenes have been identified in coal tar:

1,2-dimethylnaphthalene	
1,3	"
1,4	"
1,5	"
1,6	"
1,7	"
2,3	"
2,6	"
2,7	"

1,6- and 2,6-Dimethylnaphthalene can be recovered relatively easily, but the isolation of the other compounds is very costly and complicated.

Anthracene oil has two interesting methylhomolog fractions: first, preceding the phenanthrene fraction is the methyl fluorene fraction which accounts for 1.8 per cent of the tar and includes 1-, 2-, 3-, 4-, and 9-methylfluorene; and secondly, following the carbazole fraction, the methylphenanthrene fraction which accounts for 1.8 per cent of the tar and consists mainly of 1-, 2-, 3-, and 9-methylphenanthrene as well as 4,5-methylenephenanthrene. The benzofluorene fraction, being the highest boiling portion of the anthracene oil, also deserves mention. Distilling after the fluoranthene fraction, it accounts for 1.6 per cent of the tar and consists mainly of 1,2-, 2,3-, and 3,4-benzofluorene, as well as 5,12-dihydrotetracene.

The coal tar pitch fractions offer a large reservoir of quadrinuclear and multinuclear aromatics. These need not be discussed because even though some pitch constituents can be recovered in large quantities, their separation is beset by difficulties which would preclude the possibility of cheap production even in volume. Reference has been made already to this problem under the discussion of chrysene.

Bulk tar constituents, with the exception of 1- and 2-methylnaphthalene, are all unsubstituted, binuclear and multinuclear aromatics which include only two heterocyclic compounds, dibenzofuran and carbazole. Special attention has been focused on fluoranthene which up to now has not received adequate attention, despite the fact that next to naphthalene and phenanthrene it is the most abundant constituent of coal tar:

This has been a review of coal tar products which could be made available in substantial quantities if a demand for them were created. The data show that very few aromatics, even those which are readily accessible, are presently used as pure products--or stating this thought in another way--there is a very large source of raw material available which has not yet been exploited.

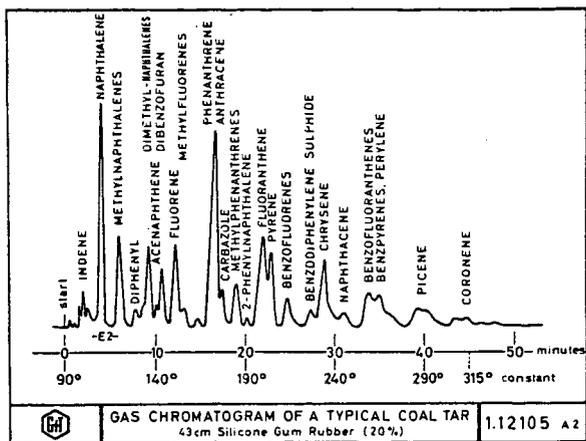


Fig. 1

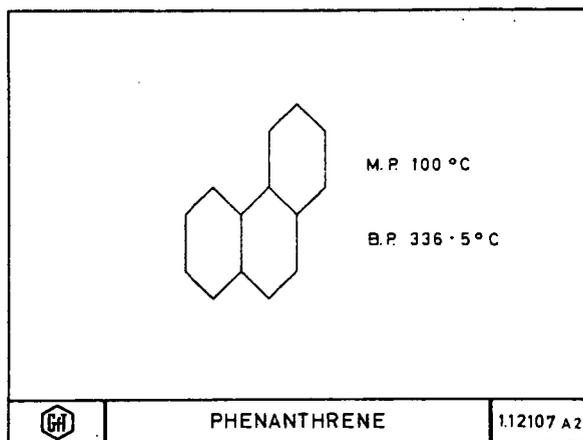


Fig. 2

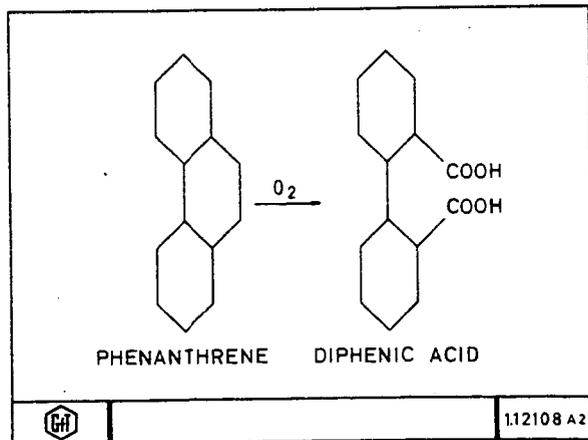


Fig. 3

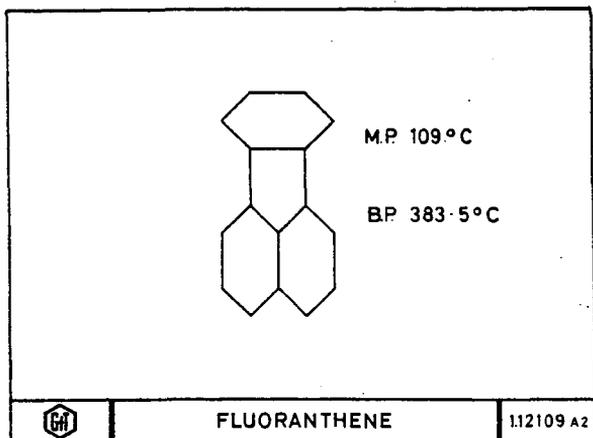


Fig. 4

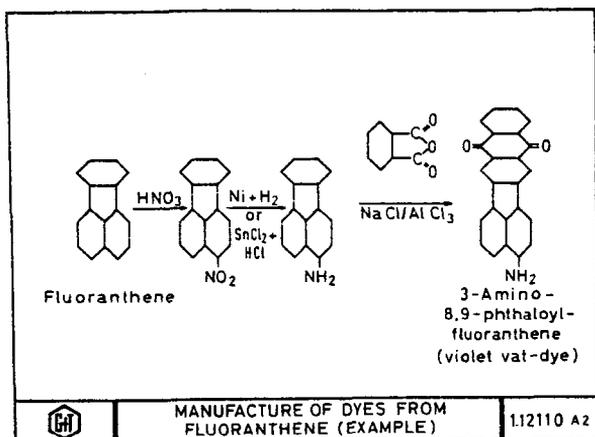


Fig. 5

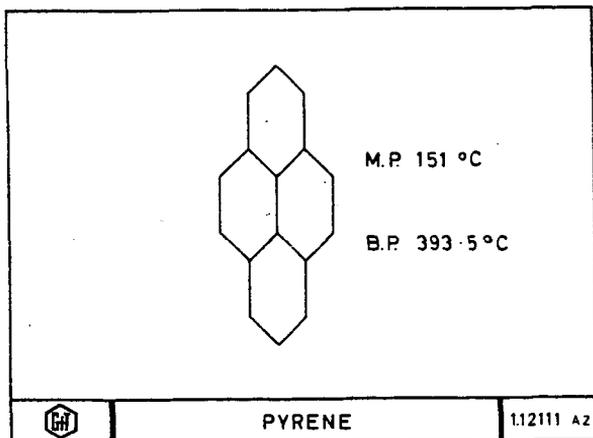


Fig. 6

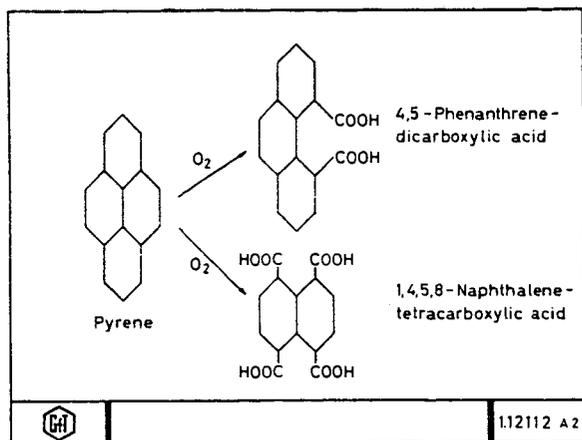


Fig. 7

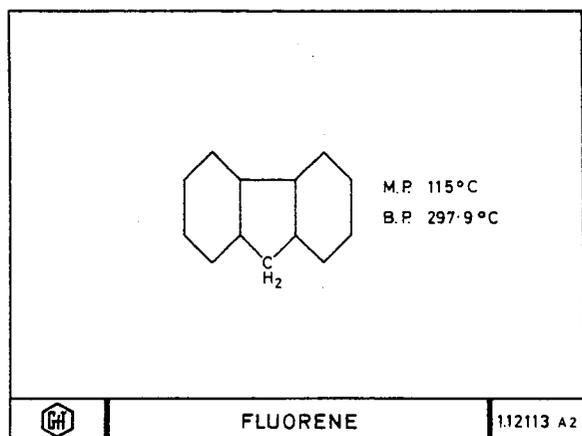


Fig. 8

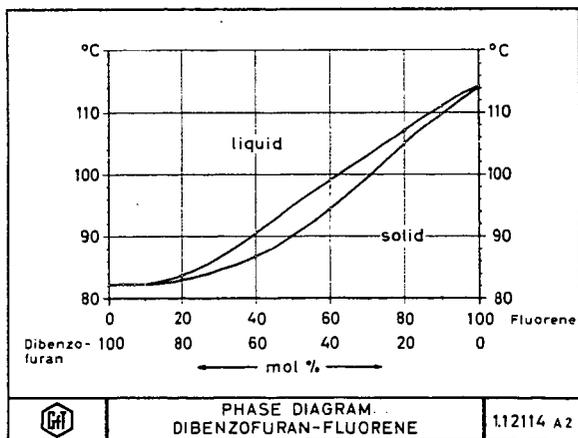


Fig. 9

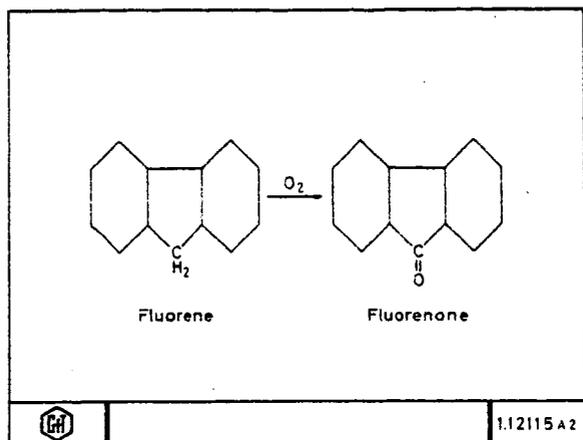


Fig. 10

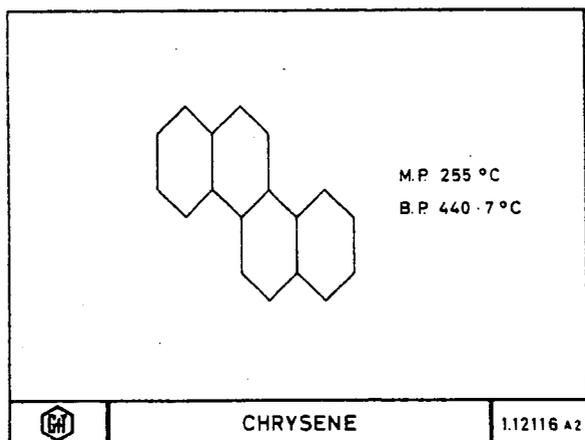


Fig. 11

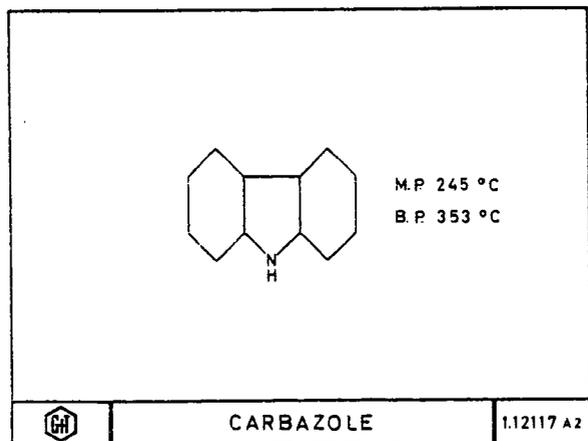


Fig. 12

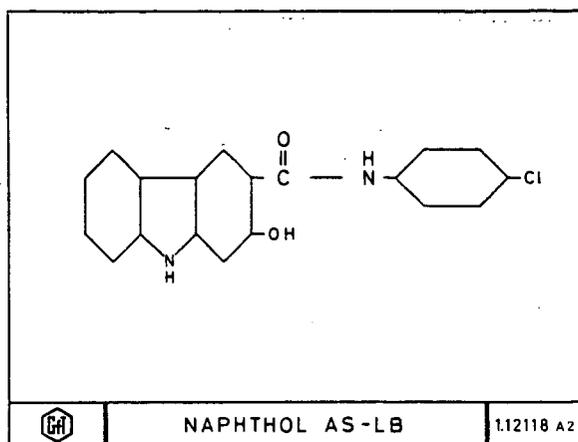


Fig. 13

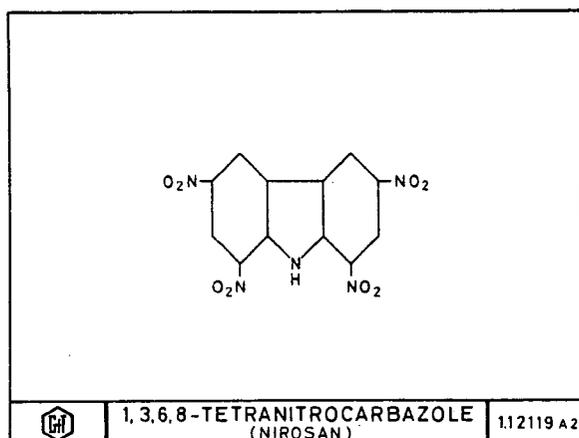


Fig. 14

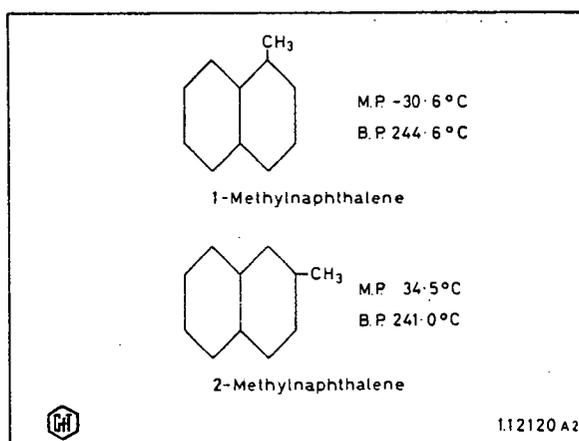


Fig. 15

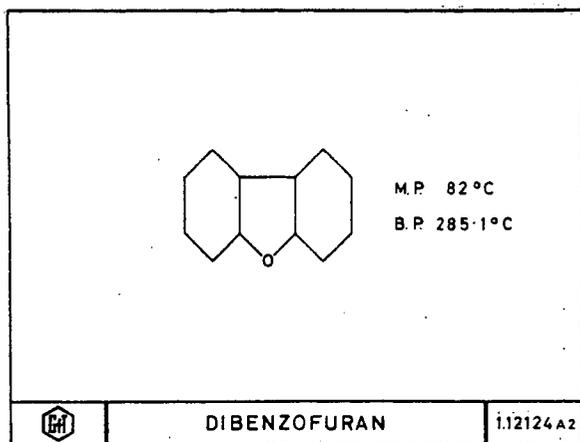


Fig. 19

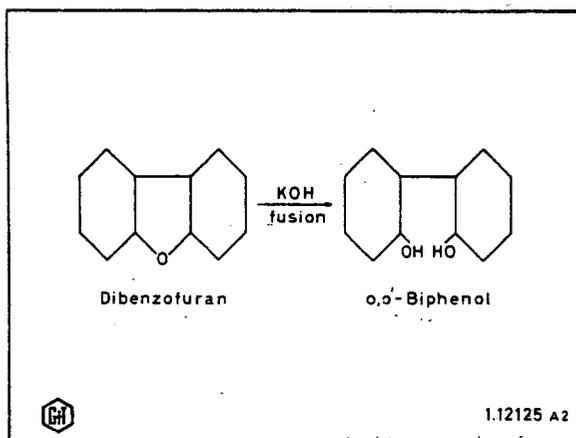


Fig. 20

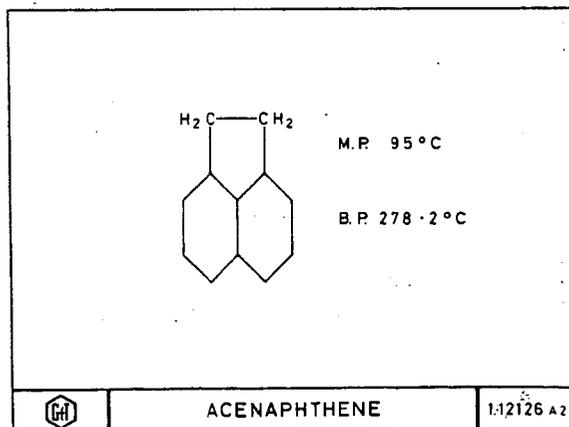


Fig. 21

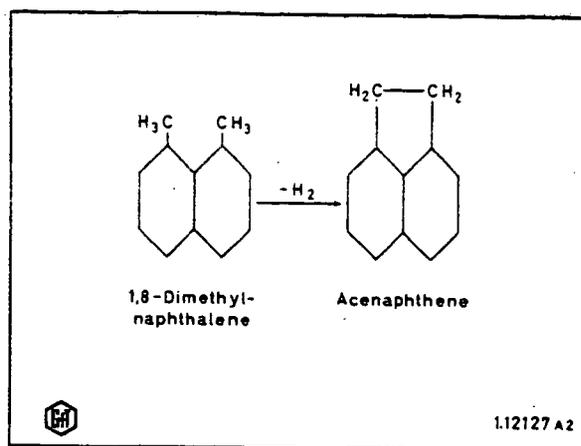


Fig. 22

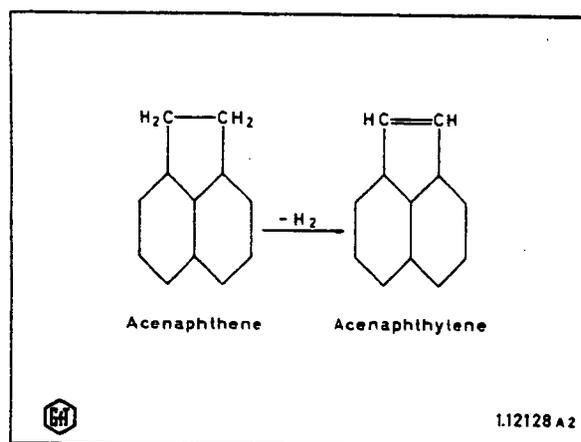


Fig. 23

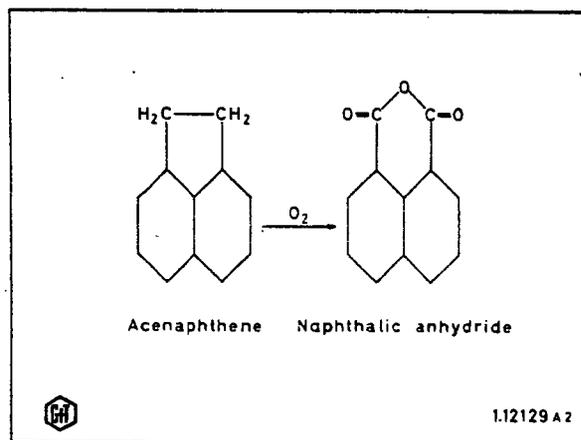


Fig. 24

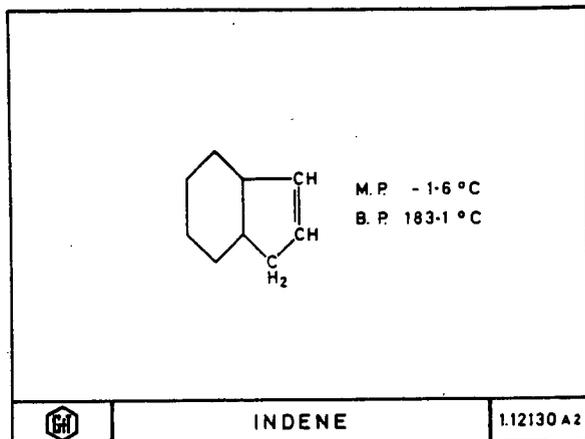


Fig. 25

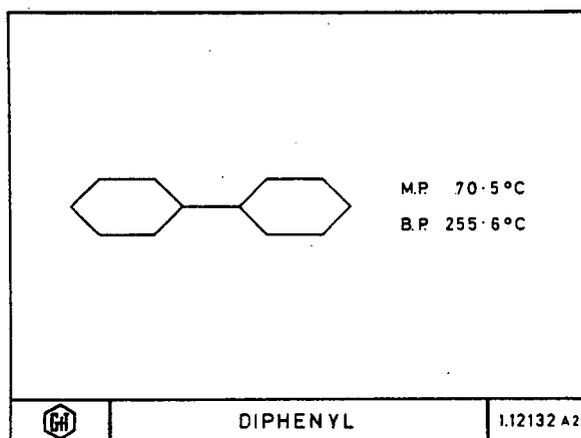


Fig. 26

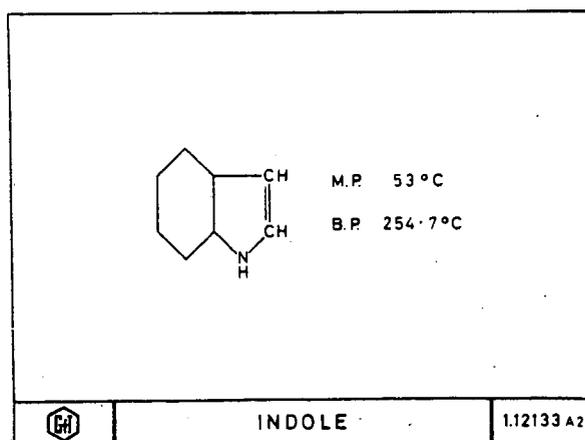


Fig. 27

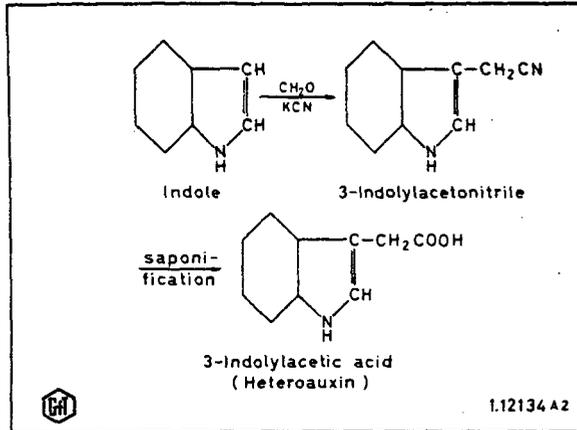


Fig. 28

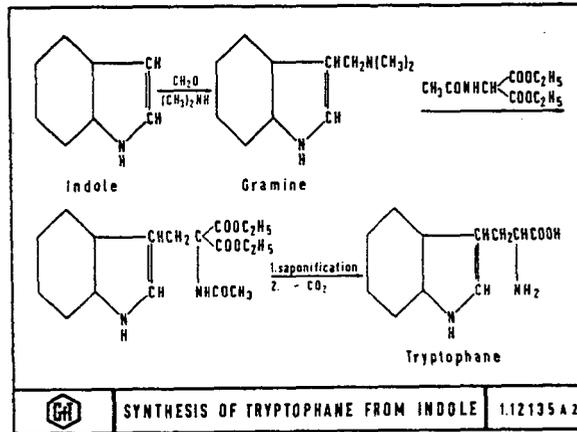


Fig. 29

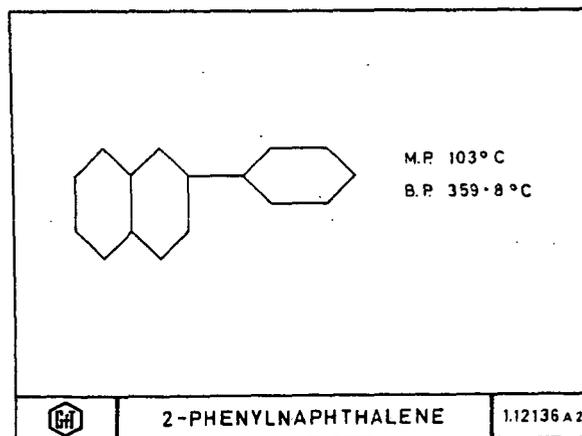


Fig. 30

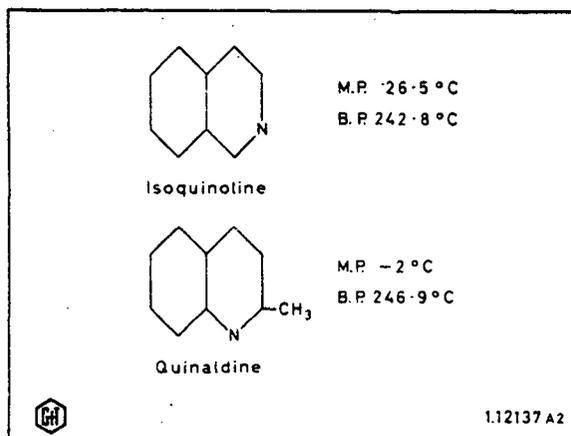


Fig. 31

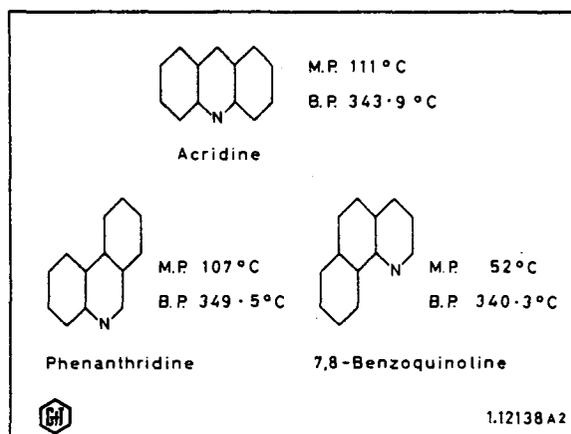


Fig. 32

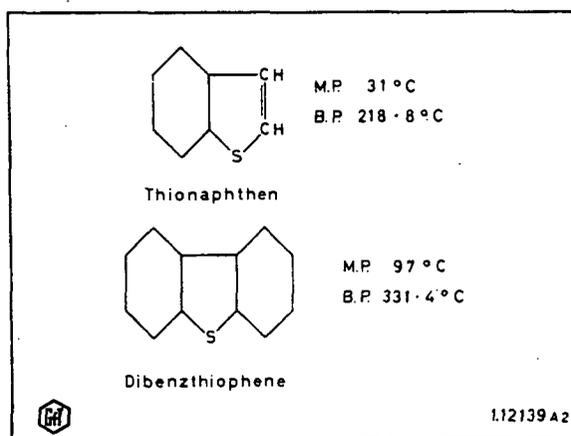


Fig. 33

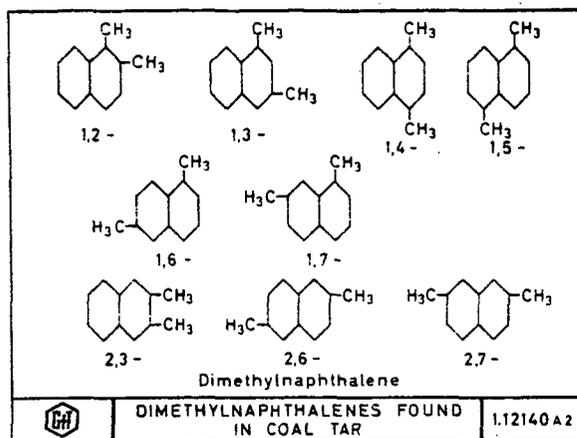


Fig. 34

CATECHOLS FROM THE CARBONIZATION OF NORTH DAKOTA LIGNITE

Philip G. Freeman

U. S. Department of the Interior, Grand Forks
Lignite Research Laboratory, Bureau of Mines,
Grand Forks, N. Dak.

INTRODUCTION

Catechol and its methyl homologs occur in a great variety of materials. These include tea, wine, grapes and other fruit, wood products, and coal tar. Of these materials only the last two have been considered as commercial sources for catechol. For example, extensive investigation has been carried out on the destructive distillation of lignin, wood, and bark as possible sources of catechols (1).

Low-temperature carbonization of coal, especially low-rank coals, is a particularly attractive source of catechols if the process can be justified by the improved fuel characteristics of the resulting char, the tar then being treated as a by-product. Also, since catechols are water-soluble, they are found not only in the tar but in the aqueous liquor as well, from which they are easily recovered.

Recovery of catechol from tar and process water has been considered feasible even when relatively low concentrations of the chemical are found. For example, Shono (2) proposes recovery of catechol from aqueous liquor, 50 liters of which contain only 220 grams catechol or 0.5 percent. Williams (3) obtained only 13 grams refined catechol from almost 2 kilograms raw tar (0.6 percent), although he obtained an equal amount of catechol from the associated liquor.

It is the purpose of this paper to show that the low-temperature carbonization products of North Dakota lignite are a rich source of catechol and its homologs.

ANALYTICAL METHODS

Catechols were found in North Dakota lignite tar early in our assay program. In the acid portion of this tar, catechol and the 3- and 4-methyl homologs are exceeded in concentration only by phenol. The relative abundance of these chemicals resulted in their crystallization from distilled fractions of the tar acids and prompted more intensive investigation. Several methods for quantitative estimation of the catechols have been used, depending on the type of mixture involved and the accuracy required.

The most accurate and universally applicable method is column partition chromatography as described by Barker and Hollingworth (4). This consists of a stationary phase of 0.1 N HCl on a support of Celite 535. The mobile phase is cyclohexane to which n-butanol is added in 1-percent increments up to 8 percent. The effluent is examined by UV spectrophotometry in a very sensitive range so that analysis is possible with quite small samples. This method was developed for analysis of ammoniacal liquors, but with slight variations can be used to determine catechols in whole tar.

A more rapid though less accurate method is gas-liquid chromatography of tar fractions or of extracts from the process water. Quantitative results are difficult with complex mixtures, but narrow-boiling fractions of tar acids and extracts of aqueous solutions can be estimated satisfactorily.

A good qualitative method for detecting catechols involves precipitation of their lead salts. The addition of lead acetate to slightly basic aqueous solutions containing catechol or the methyl catechols will result in precipitation of the insoluble lead catecholates. Under favorable conditions the precipitation is sufficiently complete for quantitative results; however, many of the more highly substituted catechols do not form lead salts, especially those substituted in the 3-position, adjacent to an OH (5).

Analysis of Low-Temperature Tar. As previously mentioned, Williams (3) extracted catechol in the amount of 0.6 percent of the raw tar. Gluud and Brauer (5) report the same percentage of catechol in low-temperature tar obtained from a Saar coal. For comparison, low-temperature tar from North Dakota lignite contains 1.0 percent catechol and, in addition, 2.3 percent 4-methyl catechol and 1.5 percent 3-methyl catechol.

Subsequent analysis of tar distillates indicated that the catechols were subject to degradation under conditions of atmospheric distillation. Distilling under vacuum greatly reduced this effect and resulted in considerable enrichment of catechols in the distillate. Tar, vacuum-distilled at 3 mm Hg to the equivalent of 240° at atmospheric pressure, gave an overhead representing 11 percent of the tar: this distillate contained 8 percent catechol, 9 percent 4-methyl catechol, and 0.6 percent 3-methyl catechol. Based on the figures given previously for gross tar, it would appear that there is too much 4-methyl catechol in this distillate and not enough 3-methyl catechol; however, it should be kept in mind that 3-substituted catechols are notoriously unstable and rearrangement or degradation of this material is the rule rather than the exception.

Analysis of Carbonizer Process Water. Catechol and 4-methyl catechol are very soluble in water; 3-methyl catechol, although less soluble than these, can still be classed as soluble. For this reason, virtually every aqueous solution that comes in contact with the tar will extract catechols. This is a recognized fact, as evident from the number of investigations concerning recovery of chemicals from aqueous liquor. Subbarao, et al, (7) extracted carbonizer process water with butyl acetate and found, in addition to catechols, a number of other phenolics. Morgan and Pettet (8) extracted up to 1.7 grams catechol per liter of low-temperature carbonization liquid. Similar results have been obtained by others (9, 10, 11).

Butyl acetate extraction was carried out on aqueous liquor from a carbonizer operated at Dickinson, N. Dak. This is a Lurgi-type carbonizer used for production of char briquets from North Dakota lignite (12, 13). Exhaustive extraction of this liquid yielded 37 grams of extract per liter of process water. This extract, analyzed by gas-liquid chromatography, consisted principally of catechol, 3- and 4-methyl catechols with some phenol, cresols, and xylenols also present. Quantitative estimation from the chromatogram indicated 41 percent catechol, 19 percent 4-methyl catechol, and 9 percent 3-methyl catechol in the mixture. Thus a liter of process water contains about 15 grams catechol, 7 grams 4-methyl catechol, and 3 grams 3-methyl catechol. This aqueous liquor is somewhat richer in catechols than those mentioned in the literature, the extraction of which is regarded as commercially feasible.

YIELDS OF CATECHOLS

Carbonization of a ton of lignite at the Dickinson plant yields 5 gallons (42 lb) of tar (70 percent of assay) (12), and 20 gallons of process water (14). Thus from the previous figures we can expect one ton of lignite to yield 0.42 pounds catechol from the tar and 2.5 pounds catechol from the process water for a total of 2.9 pounds catechol per ton of lignite carbonized. Similarly, a ton of lignite should yield 2.2 pounds of 4-methyl catechol and 1.1 pounds of 3-methyl catechol. The amount of catechols actually recovered depends, of course, on the efficiency of the extraction process. While these figures represent the amount of catechols available, it may not be economically feasible to extract the entire amount.

RECOVERY METHODS

The phenosolvan process (7, 15, 16, 20) is the most popular method currently used to extract waste waters. It consists of countercurrent extraction with an ester mixture composed primarily of butyl acetate. Entrained ester is recovered by steam distillation, making the process highly efficient.

This method of recovery can also be used on solutions of buffers used to extract catechols from the tar (3, 17).

Others have extracted aqueous liquors with ether (2, 6), "ketone oil" (9), and cresilic acid (8).

Another interesting method of recovery involves adsorption of phenolics from liquor by activated charcoal (18) or coke dust (10). The phenolics were then desorbed by steam. Catechols were also recovered by precipitation of their lead salts before adsorption of the monohydroxy phenols on charcoal (18).

Separation of Recovered Catechols. Although catechol and 3-methyl catechol boil at about the same temperature (240° and 241° C respectively) at atmospheric pressure, they are separable by distillation under reduced pressure. Thus at 20 mm Hg, 3-methyl catechol has a boiling point of 129° C, whereas that of catechol is 134° and that of 4-methyl catechol is 147° (19).

Separation of catechol and 3-methyl catechol can also be achieved under certain conditions by precipitation of lead salts (5). Similarly 3-methyl and 4-methyl catechols can be separated by precipitation of the 4-methyl catechol with ammoniacal calcium chloride (19).

CONCLUSION

It has been shown that the low-temperature carbonization products of North Dakota lignite are a rich source of catechol, 3-methyl catechol, and 4-methyl catechol. Proven methods are available for recovery and separation of these valuable chemicals. Their potential abundance could result in development of many new uses and in expansion of present applications such as medicinals, antioxidants, plastics, glues, ore flotation, photo developers, and herbicides.

REFERENCES

- (1) Sumarokov, V. P., Pyrocatechol Concentrates from Wood Tar, U.S.S.R. Pat. 106,595, July 25, 1957.

- (2) Shono, T., Pyrocatechol from Coal, Japan Pat. 76 (1953).
- (3) Williams, A. F., Recovery of Catechol from Low-Temperature Tar, Chem. and Ind. 1955, 148.
- (4) Barker, L. and Hollingworth, N. W., The Composition of Ammoniacal Liquors II, Analysis of the Phenolic Content by Chromatography, J. Applied Chem. 2, pt. 1, 16-25 (Jan. 1959).
- (5) Beckering, W. and Fowkes, W. W., Analysis of Polyhydric Phenol Mixtures, Anal. Chem. 30, 1336-8 (Aug. 1958).
- (6) Glud, W. and Brauer, P. K., Phenols from Low-Temperature Tar II, Catechol, Ges. Abhandl. zur Kenntnis der Kohle 2, 236-56 (1918).
- (7) Subbarao, V. V., Kacker, I. K., Krishna, M. G., and Zaheer, S. H., Tar Acids from Low-Temperature Carbonization I, Tar Acids from the Aqueous Liquor, Brennstoff-Chem. 42, 212-15 (1961).
- (8) Morgan, G. T., and Pettet, A.E.J., Phenolic and Other Constituents of Aqueous Liquors from Coal Carbonization, J. Soc. Chem. Ind. 56, 109-14T (1937).
- (9) Grunewald, H., The Evaporation Residue from Carbonization Water as a New Raw Material, Freiburger Forschungsch. A170, 9-17 (1960).
- (10) Diericks, A. and Jaehn, L., Adsorption of Multivalent Phenols from Waste Water, Chem. Tech. (Berlin) 10, 576-9 (1958).
- (11) Oyama, G., et al., Separation of Polyphenols from Gas Liquor, Japan Pat. 7916 (1956).
- (12) Bureau of Mines Staff, Grand Forks, N. Dak., and Washington, D. C., Technology of Lignitic Coals, pt. 2, 7692, 33-66 (1954).
- (13) Hall, R. D., North Dakota Plant Carbonizes Lignite at Mine Mouth and Briquets Resultant Char for Shipment, Coal Age 45, 47-8 (Aug. 1940).
- (14) Hoeyppner, J. J., Opland, M. L., and Fowkes, W. W., Carbonization Characteristics of Some North-Central U. S. Lignites, U. S. Bur. Mines Rept. Invest. 5260, 21 pp. (1956).
- (15) Munderloh, H., Practical Experiences with the Extraction of Phenols from Aqueous Liquors at the Low-Temperature Carbonizing Plant Offleben of the Brunswick Mines, Erdöl und Kohle 4, 177-80 (1951).
- (16) Rieche, A. and Seeboth, H., Removal of Phenols and Ammonia from Waters Diluted by Phenosolvan by Means of Exchanger Resins, Wasserwirtsch.-Wassertech. 11, 342-7 (1961).
- (17) Zemplen, G. and Dory, I., Separation of Pyrocatechol from Tar Oils, Acta Chim. Acad. Sci. Hung. 13, 397-401 (1957) in German.
- (18) Parkes, D. W., Disposal of Ammonia Liquors, J. Soc. Chem. Ind. 48, 81-6T (1929).
- (19) Jelinek, J., Separation and Isolation of Pyrocatechol, 3-Methyl Pyrocatechol and 4-Methyl Pyrocatechol, Chemicky Prumysl 6, 89-92 (1956).
- (20) Lowenstein-Lom, W., Pyrocatechol from Low-Temperature Tar, Petroleum (London) 13, 61-2, 65 (1950).

COMPOSITION OF A LOW-TEMPERATURE BITUMINOUS COAL TAR

Howard W. Wainwright

U. S. Department of the Interior, Bureau of Mines
Morgantown Coal Research Center, Morgantown, W. Va.

INTRODUCTION

A true low-temperature coal tar is generally defined as that tar produced by carbonizing coal at a temperature not exceeding 500°C. The one outstanding chemical characteristic of a true low-temperature coal tar is the small amount of any individual compound, similar in nature to petroleum and shale oil, and quite different from coke-oven tar in which a single compound, such as naphthalene can account for as much as 10 percent of the tar.

Detailed characterization of low-temperature tars has received little attention until the last few years. Representative of the excellent research being conducted in this field is that of McNeil of the Coal Tar Research Association, Landa of Czechoslovakia, Kalechits and Kuznetsov of Russia, Jäger and Kattwinkel of Germany, Kikkawa and associates of Japan, Kahler and co-workers of Battelle Memorial Institute, Vahrman of Northampton College of Applied Technology, Parant of France, and Brown of Australia. It is outside the scope of this report to review the research of these investigators. The purpose of this paper is to summarize the research carried out by the U. S. Bureau of Mines on a particular low-temperature bituminous coal tar.

The main reason for identifying and determining the amounts of individual compounds in a low-temperature coal tar is to obtain a true picture of the chemical nature of the tar so that refining and utilization can then be approached from a logical standpoint. By this it is not implied that refining will necessarily consist of isolating individual compounds on a commercial scale. However, the results from such studies may indicate that the refining of low-temperature tars will require the development and application of a partly different set of chemical processes to suit the special chemical nature of these tars.

TAR ACIDS

Analytical Procedures and Results

The tar used in this work was made from Arkwright (W. Va.) Pittsburgh-seam, high-volatile bituminous coal in a fluidized carbonization pilot plant at 500°C. The raw tar was de-ashed, dehydrated, and topped to 175°C at the plant. The tar was distilled under very mild temperature conditions, 125°C at a pressure of 133 microns, so as to minimize structural alterations of tar components. For this purpose a rotary vacuum stripper was used. Under these

conditions of distillation, the distillate amounted to about 21 weight-percent of the tar. The tar acids were recovered from the distillate by a Claisen alkali extraction using the procedure of Woolfolk and his associates (19).* The extracted phenols represented 3.54 weight-percent of the tar.

Low-Boiling Tar Acids. The phenols recovered from the distillate were fractionated in a Piro-Glover** micro spinning band still. The mixture of tar acids boiling up to 234°C (at atmospheric pressure) was fractionated in a Perkin-Elmer model 154 chromatographic apparatus using a 12-ft column of 1/4-in. copper tubing packed with Johns-Manville C-22 firebrick, 30 to 60 mesh, containing 34.7 weight-percent di-n-octyl phthalate. The column temperature was 160°C and a carrier-gas flow rate of 150 cc helium per minute was used. The results are shown in Figure 1. Thirteen peaks, or shoulders on peaks were obvious, indicating a minimum of thirteen phenols. Retention times of the substances producing the peaks, relative to peak 1, were determined and compared with the relative retention times of individual pure phenols.

A collecting system, based on one recently described (18), was used to advantage in identifying the components in peaks that were incompletely resolved. By using the collecting system, followed by infrared analysis, identities of the phenols producing the various peaks were confirmed in nearly all instances. By the combination of retention times, infrared analysis of fractions containing more than one phenol, and the peak areas, a reasonably good analysis of a total tar acid mixture boiling up to 234°C was obtained.

High-Boiling Tar Acids. To complete the characterization of the tar acids it was necessary to fractionate and analyze the high-boiling phenols. The method chosen for this complex material was countercurrent distribution, supplemented by ultraviolet and infrared spectrophotometry.

A 200-g portion of tar acids from the tar distillate was distilled at 20 mm through a column filled with glass helices. All the material boiling up to 118° head temperature, equivalent to about 232° at 760 mm, was removed as a single fraction, leaving a residue of 50 g high-boiling phenols or 25 weight percent of the original tar acid mixture. A charge of 41.68 g high-boiling tar acids was distilled at 2.9 mm and a reflux ratio of 20 to 1 in a spinning band still. The infrared spectra were obtained on all of these fractions; they were then combined on the basis of qualitative similarity to give 10 samples and subsequently fractionated by countercurrent distribution, except for the lowest boiling ones.

The instrument used was a 60-tube all-glass model, with 200 tubes in the fraction collector and an automatic robot mechanism. The tube capacity for each phase was 40 ml. The instrument was operated to give 100 to 105 transfers or plates. The average sample size was about 185 mg; the upper phase consisted

* Underlined numbers in parentheses refer to items in the list of references at the end of this report.

** Reference to specific brands is made to facilitate understanding and does not imply endorsement of such items by the Bureau of Mines.

of spectro-grade cyclohexane, and the lower phase was a phosphate buffer made from different proportions of 0.5M Na_3PO_4 and 0.5M Na_2HPO_4 to vary the pH from 9.94 to 11.36. A particular value was chosen because of the suspected presence of certain phenols and their known partition coefficients. After the completion of each fractionation, 8 ml of 1 to 1 hydrochloric acid was added to the tube to neutralize the buffer and mixed well to dissolve the phenols in the cyclohexane.

Ultraviolet spectra were obtained on each cyclohexane solution, and plots were prepared of total absorbance at two informative wavelengths versus tube number. A typical curve is shown in the upper half of Figure 2. On the basis of these plots and the qualitative similarity of the ultraviolet spectra, combinations of the cyclohexane solutions were made for infrared analysis.

On the basis of the combined qualitative results of the ultraviolet and infrared spectra, the constituents from each countercurrent distribution fractionation were distinguished and assigned numbers. The distribution curve of each constituent was readily visualized by following the appearance and disappearance of characteristic absorption bands in the spectra of consecutive countercurrent fractions. This was made easier by the fact that the distributions are essentially Gaussian as well as symmetrical. Distribution peaks observed in this manner always coincided with peaks in the plot of total absorbance versus tube number.

The milligrams of each phenol in each tube were determined from the absorptivities at characteristic wavelengths, as obtained from authentic specimens or literature data. Where such absorptivities were not available, an average absorptivity was obtained from phenols with the most similar structure or, for constituents of unknown structure, from phenols with the most similar absorption bands and boiling points. Plots of milligrams versus tube number were prepared (see bottom half of fig. 2).

Nature of Tar Acids

The results of the qualitative and quantitative analytical procedures for the tar acids are summarized in Table 1. The compounds have been arranged in this table according to groups involving the same fundamental ring structures. Approximately 80 individual compounds were identified, mostly with respect to individual isomers, and the amounts were determined, or estimated, in nearly all instances.

Five different fundamental ring structures were observed among the tar acids. These were:

1. Phenol
2. Indanol and Indenol
3. Phenylphenol
4. Naphthol and Tetrahydronaphthol
5. Fluorenol

In addition, aliphatic carboxylic acids were present in all boiling ranges, and indanones were present as impurities in a few fractions. The latter were apparently capable of functioning as acids in alkaline solutions, probably through

a keto-enol mechanism. Polyhydric phenols were not present in large enough quantities to detect. As these compounds are quite soluble in the warm discharge water, they were probably effectively extracted from the tar at the plant.

The individual tar acids identified consisted of these seven fundamental structures; mostly methyl groups and some ethyl groups were attached. About 3 tar acids had isopropyl groups, and about 10 had n-propyl groups, but no phenols with butyl groups or higher could be found. Cyclohexyl groups and probably also cycloalkenyl groups were present. A small proportion of alkenyl groups, like propenyl, were likewise present. Alkylphenols with a total of more than 6 carbon atoms in alkyl groups were apparently absent. The most prevalent class of phenol among the high-boiling tar acids was the naphthols.

Nine individual tar acids were identified; each comprised more than 3 weight-percent of the total tar acids and together comprised nearly one-half of the total tar acids. All were low-molecular-weight alkylphenols, as follows: o-, m-, and p-cresol, 2,4-, 2,5-, 3,4-, and 3,5-xyleneol, 2,3,5-trimethylphenol, and 4-ethyl-2-methylphenol.

Complete details of the characterization of the tar acids have been published (10, 11, 12, 15, 16, 20).

TAR BASES

Analytical Procedures and Results

About 3 liters of the low-temperature bituminous coal tar distillate were extracted by the method of Fisher and Eisner (6) to remove tar bases. The tar bases were purified by treatment with solid potassium hydroxide to pH 12, extraction with ether, acidification of the ether extract with sulfuric acid, evaporation of the ether by streaming nitrogen at room temperature, regeneration by adding solid potassium hydroxide to pH 12, extraction with benzene and drying the extract by refluxing under nitrogen in a Dean-Stark apparatus. Distillative removal of the benzene yielded about 40 g dry tar bases, representing about 0.31 weight-percent of the total tar.

A 37.50-g portion of the dry tar bases was fractionated in a Piro-Glover micro spinning band still, using a reflux ratio of 15 to 1, a kettle temperature of about 25° to 186°C, and a head pressure of 80 to 3 mm from the beginning to the end of the run, respectively. Infrared spectra of the tar-base distillate fractions were obtained with a model 21 Perkin-Elmer infrared spectrophotometer and ultraviolet spectra with the Beckman DK-2 spectrophotometer.

These spectra were compared with those of individual compounds that conceivably could be present in the various fractions on the basis of boiling point. The compounds found in the distillate fractions are listed in Table 2. The compounds have been arranged according to groups involving the same fundamental ring structures. Approximately 50 individual compounds were identified, and the amounts were determined, or estimated, in nearly all instances.

Eight different fundamental ring structures were observed among the tar bases. These were:

- | | |
|-------------------------|--------------------|
| 1. Pyridine | 5. Benzoquinoline |
| 2. Cyclopentenopyridine | 6. Aniline |
| 3. Phenylpyridine | 7. N-benzylaniline |
| 4. Quinoline | 8. Naphthylamine |

Two ring structures appeared to be present, although no individual compounds could be identified; these were tetrahydroquinoline and phenylaniline. A special effort was made to identify isoquinoline and its alkyl derivatives, but no indication of their presence was found. These structures covered the boiling range from initial boiling point to about 355°C. It would appear to be certain that the polycyclic structures also would be present in the distillation residue or "pitch."

The individual tar bases identified consist of these eight fundamental structures, with mostly methyl and some ethyl groups attached. One compound with an isopropyl group was identified, but no alkyl groups with chain lengths greater than two carbon atoms were observed. Under the conditions of formation of the tar (500°C), alkyl chains of three or four carbons could conceivably cyclize to form fused saturated rings, as exemplified by cyclopentenopyridines and tetrahydroquinolines. The spectra of alkyl derivatives of these compounds were not available but 2,3-cyclopentenopyridine was definitely identified, and tar-base-distillate fractions 10 to 20 appeared to contain appreciable amounts of alkyl-5,6,7,8-tetrahydroquinolines. There was no doubt, from the ultraviolet spectra of these fractions, that they were rich in some kind of pyridine, that is, compounds with a pyridine ring but no other unsaturated ring in the molecule. Yet the boiling range of these fractions was above the boiling points of the known highly alkylated pyridines. On the other hand, the boiling points of the known alkyl-5,6,7,8-tetrahydroquinolines, which have a pyridine ring but no other aromatic ring, covered the boiling range for fractions 10 to 20 quite closely.

Eight individual tar-base compounds were identified; each comprised more than two weight-percent of the total tar bases and together they comprised fully one-fourth of the total tar bases. All were quinolines, as follows: 2- and 4-methylquinoline, 2,4-dimethylquinoline, 2,4,6-, 2,4,7-, 2,4,8- and 2,6,8-trimethylquinoline, and benzo[f]quinoline. From this standpoint one can say that quinolines, especially those alkylated in the 2- and 4-positions, are the compounds that best typify the tar bases from low-temperature bituminous coal tar and not pyridines, as might have been assumed.

Details of the characterization of the tar bases, including infrared spectral-structural correlations of quinolines, have been published (4, 13, 17).

NEUTRAL OIL

Analytical Procedures and Results

The neutral oil, free of tar acids and bases, was fractionally distilled into 66 fractions. The silica gel adsorption method based on displacement chromatographic techniques, which have been applied to petroleum distillates (7)

and shale-oil naphthas (5), was adapted for separating the aromatic hydrocarbons from saturates and unsaturates. Results of the displacement chromatographic separation are given in Table 3.

Aromatic Hydrocarbons. Aromatic hydrocarbons in the distillate fractions boiling up to 275°C were analyzed by gas-liquid chromatography.

Generally, two methods were followed to identify the aromatic hydrocarbons. The first consisted of (a) preliminary identification of the unknown by comparing its retention time with those of known compounds, and (b) final confirmation of the identity by comparing the infrared spectrum of the collected material with that of the authentic specimen. The chromatograms for two different aromatic cuts, shown in Figure 3, illustrate a good separation in (A) and a complete overlapping of some components in (B), which were subsequently identified and their ratios estimated by infrared spectrophotometry. Table 4 shows the results of the identifications, the peak numbers in the table corresponding to the peak numbers in Fig. 3.

The second method of identification involved the correlation curves of relative retention and boiling points, which were applied in those instances where retention times of authentic specimens were not available.

The aromatic hydrocarbons found in the low-temperature bituminous coal tar and their quantities are presented in Table 5.

Analysis of the aromatic hydrocarbons in the distillate fractions boiling from 275° to 344° is in progress. They are being analyzed by countercurrent distribution using a dual solvent system of 90 weight-percent ethyl alcohol in water for the lower phase and isooctane for the upper phase. Two runs were made on distillate fractions covering the range 275°-282°C, 9 runs on distillate fractions covering the range 287°-344°C and 1 run on the distillate residue boiling above 344°C. In each run 120 transfers were made. Both ultraviolet and infrared spectra are presently being obtained on the contents of each of the 120 tubes. Results to date show that the polycyclic aromatics are essentially completely separated from the paraffins and the olefins, and that the aromatics are separated from each other to a considerable extent. Among the compounds identified are phenanthrene, anthracene, dibenzofuran, carbazole, 1-methylcarbazole, α -olefins, β -branched α -olefins, and trans β (or higher) olefins.

Considerably more detail on the identification of the aromatic hydrocarbons has been described in two earlier publications (1, 2).

C₁₀-C₁₆ n-Paraffins, Isoparaffins and α -Olefins. The non-aromatic hydrocarbon concentrates were obtained from the same neutral oil used in the work on aromatic hydrocarbons. The paraffins and olefins were analyzed by gas-liquid chromatography.

Identification of individual n-paraffins and α -olefins in the non-aromatic cuts was based primarily on retention time. Infrared spectra served mostly for simply confirming the general chemical types. With the exception of 2-methyldecane, authentic specimens of the isoparaffins were not available, so that a somewhat different approach had to be used. It was observed that when the

logarithms of the relative retentions of C_{10} through C_{16} n-paraffins and α -olefins were plotted against their respective boiling points, two parallel, slightly curved lines were obtained. It was assumed that the curve for the 2-methylalkanes would likewise be parallel to the curves for the n-paraffins and α -olefins, and would pass through the one known point for 2-methyldecane. Figure 4 shows the curves for these three chemical types at 170° and 220°.

The individual n-paraffins, isoparaffins, and α -olefins found in the neutral oil, and their amounts, are presented in Table 6.

The quantities of total naphthenes and total trans-olefins were estimated to be only 2.5 percent and 0.5 percent, respectively, of the neutral oil. The quantities of total n-paraffins, total isoparaffins and total α -olefins, however, were determined to be 5.20 percent, 1.03 percent and 2.40 percent, respectively, of the neutral oil. Thus, about three-fourths of the saturates and olefins were made up of the 21 individual compounds that were identified.

Details of this work have been published (3).

PITCH RESINS

Analytical Procedures and Results

The resins from the pitch remaining after the low-temperature bituminous coal tar was distilled were characterized by ring analysis, infrared and ultra-violet spectra, and pyrolysis to structural units. Resins from lignite and sub-bituminous tars were also characterized and are included in this section.

Two different resins were isolated from each pitch: (1) a low molecular weight resin that was insoluble in petroleum ether (boiling range 100° to 115°) but soluble in benzene; (2) a medium molecular weight resin that was insoluble in benzene but soluble in quinoline. The physical properties of these resins are given in Table 7.

The n-d-M method (8) was used for ring analysis. The method is not directly applicable to high oxygen content samples such as coal tar resins since the substitution of an oxygen atom for a methylene group results in an increase in the refractive index and, in particular, in the density of a hydrocarbon. A modification of the n-d-M method was devised that made it possible to obtain acceptable ring analyses of high oxygen content samples (14). A method was also developed for determining the arrangement of rings in polynuclear compounds using the ring index (total rings per carbon atom, R/C) and the atomic hydrogen to carbon ratio (H/C) (9). Seven different series of aromatic ring arrangements were presented ranging from entirely linear structures like phenanthrene, picene, etc., (Series I) to highly globular structures like coronene (Series VII). Data on the number and arrangement of rings in the two low-temperature bituminous resins are given in Table 8.

The resins have four or five aromatic rings and two to six oxygen atoms per molecule. In addition, the lower molecular weight resin apparently has a linear arrangement of rings with one or two saturated rings, while the higher

molecular weight resin has a globular arrangement of rings with five to seven saturated rings. Substituents such as methyl groups, are apparently present, in particular on the lower molecular weight resin.

The infrared and ultraviolet spectra of the resins indicate the following general structure for all of the resins, some features being considerably better established than others. The resins are basically aromatic compounds with mostly isolated single aromatic rings and some clusters of two fused aromatic rings. Saturated rings, possibly including ether groups, probably complete the hydrocarbon skeleton. The major substituents are phenolic hydroxyl groups and, in particular, methyl groups. Most aromatic rings have at least two substituents; these are mostly either methyl groups or fused saturated rings or both. Alkyl substitution is greater for the lower molecular weight resins. Carbonyl groups are present; these are conjugated with either aromatic rings or olefinic groups or both. The hydroxyl groups and carbonyl groups are not on adjacent carbon atoms in at least the great majority of instances, and the carbonyl group is probably not present in a quinone unit.

Insofar as comparisons can be made, these observations are in complete agreement with structural features determined by ring analysis and molecular formula.

Structure determination of the resins was also made by combined pyrolysis and gas-liquid chromatography. The pyrolysis apparatus consisted of a small coil made from a 25.5-in. length of 28-gauge nichrome wire suspended in a stainless-steel chamber connected directly to a gas-liquid chromatographic unit by a short length of 1/8-in. stainless-steel tubing. The chamber, the connecting tubing, and a longer preheating section of tubing were all electrically heated to approximately the same temperature, which was a few degrees below the GLC column temperature. Helium carrier gas passed through the preheat section and the pyrolysis chamber into the column.

The GLC column consisted of a 20-ft length of 1/4-in. copper tubing filled with 75 g packing made from 25 percent Apiezon L grease on 30 to 60 mesh fire-brick. A column temperature of 220°C was used so that relatively high-boiling products, such as phenols and naphthalenes, would be readily detected if present. Gas-liquid chromatographic fractions were collected for infrared spectra.

The semi-solid fraction of the benzene soluble, petroleum ether insoluble resins from a West Virginia bituminous coal tar pitch and a Nugget, Wyoming, subbituminous pitch were pyrolyzed under identical conditions. The resins were pyrolyzed at 528°C in a chamber preheated to 175°C using a sealed glass tube technique. The procedure consisted of placing about 25 mg of the finely divided resin in a glass capillary tube that was then evacuated, sealed, and inserted in the coil. With this size sample and a setting of about 22.5 volts, the tube shattered at 8.4 seconds. The volatile pyrolysis products were swept immediately and directly into the GLC column by the stream of helium.

The chromatograms obtained with the subbituminous and bituminous resins are shown in Figures 5 and 6, respectively. The relative retentions of the pyrolysis products producing the peaks are compared with the relative retentions

of pure compounds in Tables 9 and 10. The relative amounts of pyrolysis products from the two different resins are compared in Table 11. Three compounds were found in the pyrolysis products of the bituminous pitch that were not present for the subbituminous resin. These were 2-methylpentane, 2,3,3-trimethylpentane, and 2,2,3,4-tetramethylpentane. On the other hand, the infrared absorption bands characteristic of different types of olefins, which were readily observed for the pyrolysis products of the subbituminous resin, were absent in the spectra of the pyrolysis products of the bituminous resin.

It can be seen from Table 11 that the proportion of branched paraffins to benzene is considerably less for the pyrolysis products of the bituminous resin than for the subbituminous resin. Also, the proportion of dimethylbenzene is less for the bituminous resin than for the subbituminous resin. These results indicate a lower proportion of saturated, fused multi-ring systems with quaternary carbons for the bituminous resin than for the subbituminous resin. The reason for the apparently complete absence of olefins in the pyrolysis products of the bituminous resin is not known.

A resin molecule containing as part of its structure a unit like 5,6,6a,7,8,12b-hexahydro-6,7-dimethylbenzo[c]phenanthrene could conceivably split up (with, of course, transfer of hydrogen from other structural units) to form 2,3,4-trimethylpentane, as shown in Figure 7. Only those methyl groups required for the formation of 2,3,4-trimethylpentane are shown; additional methyl groups would be present, as determined in previous work. One of the benzene rings in this unit could be released as such, or both benzene rings could be incorporated in the formation of the pyrolysis residue or char. The fact that the resins are rich in oxygen (10 to 15 weight-percent) whereas no oxygen-containing organic compounds could be identified in the volatile pyrolysis products would indicate that the oxygen-containing units in the resin (primarily benzene rings with phenolic hydroxyl groups) are involved in char formation. Under these circumstances there would be a greater proportion of aliphatic compounds than aromatic compounds in the volatile products, such as was actually observed.

Although the pyrolysis results might appear unusual or unexpected, nevertheless the general structure of the resins indicated by these results is the same as that indicated by ring analysis (including ring arrangement), infrared spectra, and ultraviolet spectra.

REFERENCES

1. Chang, Ta-Chuang Lo, and Clarence Karr, Jr. Gas-Liquid Chromatographic Analysis of Aromatic Hydrocarbons Boiling Between 202° and 280° in a Low-Temperature Coal Tar. *Anal. Chim. Acta*, v. 24, April 1961, pp. 343-356.
2. Chang, Ta-Chuang Lo, and Clarence Karr, Jr. Gas-Liquid Chromatographic Analysis of Aromatic Hydrocarbons Boiling Up to 218° in a Low-Temperature Coal Tar. *Anal. Chim. Acta*, v. 21, November 1959, pp. 474-490.
3. Chang, Ta-Chuang Lo, and Clarence Karr, Jr. Gas-Liquid Chromatographic Analysis of C₁₀-C₁₆ n-Paraffins, Isoparaffins and α -Olefins in a Low-Temperature Coal Tar. *Anal. Chim. Acta*, v. 26, May 1962, pp. 410-418.
4. Chang, Ta-Chuang Lo, and Clarence Karr, Jr. Spectrophotometric Determination of Small Quantities of Some Individual Pyridine Bases by Successive Extractions. *Anal. Chem.*, v. 29, No. 11, 1957, pp. 1617-1619.

5. Dinneen, G. U., C. W. Bailey, J. R. Smith, and John S. Ball. Shale-Oil Naphthas. Analysis of Small Samples by the Silica Gel Adsorption Method. *Ind. and Eng. Chem., Anal. Ed.*, v. 19, No. 12, 1947, pp. 992-998.
6. Fisher, C. Harold, and Abner Eisner. Extraction Methods for Determining Tar Acids and Bases and Variables Affecting Their Accuracy. *Ind. and Eng. Chem., Anal. Ed.*, v. 9, No. 5, 1937, pp. 213-218.
7. Gooding, Richard M., and Ralph L. Hopkins. The Determination of Aromatics in Petroleum Distillates. Presented before the 110th Mtg., Am. Chem. Soc., Chicago, September 1946.
8. Hazelwood, R. Nichols. Determination of Ring Content of Aromatic Petroleum Fractions. *Anal. Chem.*, v. 26, No. 6, 1954, pp. 1073-1076.
9. Karr, Clarence, Jr. A Note on Determining the Arrangement of Rings in the Polynuclear Aromatic Compounds of Coal Tar Pitch Fractions. *Fuel*, v. 39, March 1960, pp. 119-123.
10. Karr, Clarence, Jr. Physical Properties of Low-Boiling Phenols. A Literature Survey. Bureau of Mines Inf. Circ. 7802, 1957, 15 pp.
11. Karr, Clarence, Jr., Paul M. Brown, Patricia A. Estep, and George L. Humphrey. Analysis of Low-Temperature Tar Phenols Boiling Up to 234°C. *Fuel*, v. 37, April 1958, pp. 227-235.
12. Karr, Clarence, Jr., Paul M. Brown, Patricia A. Estep, and George L. Humphrey. Identification and Determination of Low-Boiling Phenols in Low-Temperature Coal Tar. *Anal. Chem.*, v. 30, No. 8, 1958, pp. 1413-1416.
13. Karr, Clarence, Jr., and Ta-Chuang Lo Chang. Spectrophotometric Analysis of the Distillable Low-Temperature Tar Bases. *J. Inst. Fuel*, v. 31, December 1958, pp. 522-527.
14. Karr, Clarence, Jr., and Joseph R. Comberiat. Ring Analysis of High Oxygen Content Samples; A Modification of the n-d-M Method. *Anal. Chem.*, v. 33, No. 10, 1961, pp. 1420-1423.
15. Karr, Clarence, Jr., Patricia A. Estep, Ta-Chuang Lo Chang, and Joseph R. Comberiat. Identification of Distillable Tar Acids and Tar Bases From a Low-Temperature Bituminous Coal Tar. Bureau of Mines Bull. 591, 1961, 227 pp.
16. Karr, Clarence, Jr., Patricia A. Estep, and Lester L. Hirst, Jr. Counter-current Distribution of High-Boiling Phenols From a Low-Temperature Coal Tar. *Anal. Chem.*, v. 32, No. 4, 1960, pp. 463-475.
17. Karr, Clarence, Jr., Patricia A. Estep, and Anthony J. Papa. Infrared Spectral-Structural Correlations of Quinolines. *J. Am. Chem. Soc.*, v. 81, January 1959, pp. 152-156.
18. Potts, W. J., Jr. Some Applications of Infrared Spectroscopy to Chemical Analysis. Presented before the 11th Mtg., Soc. Appl. Spectry., New York, 1956.
19. Woolfolk, E. Oscar, Calvin Columbic, Robert A. Friedel, Milton Orchin, and Henry H. Storch. Characterization of Tar Acids From Coal Hydrogenation Oils. Bureau of Mines Bull. 487, 1950, 56 pp.
20. Yarboro, Theodore L., and Clarence Karr, Jr. A Procedure for Converting Aryl Halides to High Molecular Weight Phenols. *J. Org. Chem.*, v. 24, August 1959, pp. 1141-1143.

TABLE 1. - Summary of tar acids identified in a low-temperature bituminous coal tar and their amounts

Distillable tar acids	Weight-percent ¹	Distillable tar acids	Weight-percent ¹
Phenol	2.3	2-Cyclohexylphenol	0.20
o-Cresol	5.6	2-Alkylcycloalkylphenol I	0.02
m-Cresol	7.2	2-Alkylcycloalkylphenol II	0.01
p-Cresol	4.9	Cycloalkenylphenol I (?) ²	0.005
o-Ethylphenol	1.5	Cycloalkenylphenol II (?)	0.04
m-Ethylphenol	2.5	4-Indanol	0.53
p-Ethylphenol	2.5	5-Indanol	0.49
2,3-Xylenol	1.3	1-Methyl-5-indanol (?)	0.36
2,4-Xylenol	9.1	3-Methyl-4-indanol (?)	0.09
2,5-Xylenol	3.7	4-Methyl-1-indanone (?)	0.15
2,6-Xylenol	1.4	6-Methyl-1-indanone (?)	0.01
3,4-Xylenol	3.7	Alkyl indanone	0.03
3,5-Xylenol	5.9	6-Methyl-5-indanol (?)	0.005
2,3,5-Trimethylphenol	3.3	7-Methyl-5-indanol	0.10
2,3,6-Trimethylphenol	0.01	4-Indenol	0.03
2,4,6-Trimethylphenol	1.4	5-Indenol	0.27
3,4,5-Trimethylphenol	0.13	1-, 2-, or 3-Methyl-4-indenol	0.14
3-Ethyl-2-methylphenol	0.01	Methyl indenol	0.08
3-Ethyl-4-methylphenol	0.01	1-, 2-, or 3-Polyalkyl-4-indenol	0.13
3-Ethyl-5-methylphenol	2.1	3,4-Dinuclearphenol	0.06
4-Ethyl-2-methylphenol	4.5	5,6,7,8-Tetrahydro-1-naphthol	0.02
5-Ethyl-2-methylphenol	0.01	5,6,7,8-Tetrahydro-2-naphthol	0.02
2-n-Propylphenol	0.01	2-Phenylphenol	0.08
3-n-Propylphenol	0.01	3-Phenylphenol	0.03
4-n-Propylphenol	0.13	4-Phenylphenol	0.37
4-Isopropylphenol	0.01	i-Naphthol	0.20
2,3,5,6-Tetramethylphenol	0.04	2-Naphthol	1.54
3-Methyl-5-n-propylphenol (?)	0.29	1-Methyl-2-naphthol	0.02
2-Methyl-5-isopropylphenol	0.01	3-Methyl-2-naphthol (?)	0.008
2-Ethyl-6-n-propylphenol (?)	0.26	4-Methyl-1-naphthol	0.04
3-Ethyl-4-n-propylphenol (?)	0.12	4-Methyl-2-naphthol (?)	0.11
4-Ethyl-3-n-propylphenol (?)	0.24	6-Methyl-2-naphthol (?)	0.01
4-Isopropyl-3-n-propylphenol (?)	0.14	7-Methyl-2-naphthol (?)	0.05
2,4-Di-n-propylphenol (?)	0.13	8-Methyl-2-naphthol (?)	0.02
2,4- or 3,4-Dialkylphenol (?)	0.02	2-Ethyl-1-naphthol (?)	0.85
3-Methyl-2-propen-1-ylphenol (?)	0.003	2,5- or 2,7-Dimethyl-1-naphthol (?)	0.008
Alkenylphenol I	0.005	2,6-Dimethyl-1-naphthol (?)	0.008
Alkenylphenol II	0.001	5,7-Dimethyl-1-naphthol (?)	0.05
Alkenylphenol III	0.03	Methyl-2,3-, or 4-fluoreno	0.06

¹ The distillable tar acids constitute 3.62 weight-percent of the tar.

² (?) indicates uncertainty as to which isomer is present.

TABLE 2. - Summary of tar bases identified in a low-temperature bituminous coal tar and their amounts

Distillable tar bases	Weight-percent ¹	Distillable tar bases	Weight-percent ¹
Aniline	0.26	N-Benzyl-2-methylaniline	0.19
3-Methylaniline	0.48	N-Benzyl-4-methylaniline	0.29
2-Ethylaniline	0.22	Quinoline	1.86
2,3-Dimethylpyridine	0.01	2-Naphthylamine	0.63
2,4-Dimethylpyridine	0.45	2-Methylquinoline	2.36
2,5-Dimethylaniline	0.22	4-Methylquinoline	3.21
2,6-Dimethylaniline	0.60	6-Methylquinoline	0.44
3,5-Dimethylpyridine	0.04	7-Methylquinoline	1.02
3,5-Dimethylaniline	0.77	8-Methylquinoline	0.33
N,N-Dimethylaniline	0.06	2,4-Dimethylquinoline	5.92
N-Methyl-2-methylaniline	0.16	2,6-Dimethylquinoline	1.95
2,3,5-Trimethylpyridine	0.58	2,7-Dimethylquinoline	1.36
2,4,6-Trimethylpyridine	0.87	2,8-Dimethylquinoline	1.89
3-Ethyl-4-methylpyridine	0.88	3,4-Dimethylquinoline (?) ²	1.33
4-Ethyl-2-methylpyridine	0.11	4,6-Dimethylquinoline (?)	1.32
5-Ethyl-2-methylpyridine	0.48	2,4,6-Trimethylquinoline	3.41
4-Isopropylpyridine	0.09	2,4,7-Trimethylquinoline	2.85
2,3,4,6-Tetramethylpyridine	0.99	2,4,8-Trimethylquinoline	2.81
2,3,5,6-Tetramethylpyridine	0.24	2,6,8-Trimethylquinoline	2.25
2,6-Dimethyl-4-ethylpyridine	0.45	Acridine (2,3-benzoquinoline)	0.13
3,4-Diethylpyridine (?)	0.63	2,4-Dimethylbenzo[g]quinoline (?)	
2,3-Cyclopentenopyridine	0.16	Phenanthridine (3,4-benzoquinoline)	0.48
Alkyl-5,6,7,8-tetrahydroquinolines (?)		Benzo[f]quinoline (5,6-benzoquinoline)	2.13
2-Phenylpyridine	1.03	Benzo[h]quinoline (7,8-benzoquinoline)	1.64
4-Phenylpyridine	1.21	2,4-Dimethylbenzo[f]quinoline (?)	
2-Methyl-6-phenyl-pyridine (?)	0.72	2,4-Dimethylbenzo[h]quinoline (?)	
Alkylphenylanilines (?)			

¹ The distillable tar bases constitute 0.31 weight-percent of the tar.

² (?) indicates uncertainty as to which isomer is present.

TABLE 3.- Displacement chromatographic separation of neutral oil distillate fractions into chemical types

Distillate fraction No.	Weight of charge, g	Column temperature, °C	Saturates + some olefins		Aromatics + some olefins and some O,S compounds		Material retained on column, g	Weight of aromatics identified by GLC, g
			n _D range	Total weight, g	n _D range	Total weight, g		
1 + 2 ¹	1.77	70	1.3930-1.3941	0.74	1.3941-1.5007	0.70	0.33	0.57
3 ¹	3.15	70	1.4381-1.4832	0.61	1.4832-1.5310	2.29	0.25	1.95
4 ¹	3.60	70	1.4252-1.4471	1.20	1.4911-1.5397	2.19	0.23	1.66
5 ¹	7.40	70	1.4328-1.4695	2.11	1.4912-1.5545	4.32	0.97	4.30
6 ¹	7.70	70	1.4400-1.4683	1.93	1.4895-1.5601	5.21	0.56	4.81
7 + 8 ¹	21	70	1.4025-1.4894	9.98	1.4915-1.5658	9.03	1.99	5.828
9 ¹	4.29	70	1.4281-1.4705	1.77	1.4995-1.5867	1.94	0.58	1.329
10 + 11 ²	14.93	room temp.	1.4383-1.4938	7.04	1.4985-1.5640	6.36	1.53	3.152
12 + 13 ³	12.58	room temp.	1.4321-1.4900	5.00	1.4990-1.5790	5.87	1.71	3.089
14 ⁴	11.16	room temp.	1.4285-1.4769	5.17	1.4991-1.5864	5.24	0.75	2.314
15 ¹	15.15	room temp.	1.4294-1.4839	6.80	1.4971-1.5947	7.31	1.04	5.419
16 ¹	13.90	room temp.	1.4400-1.4830	4.11	1.5027-1.6039	7.81	1.98	5.771
17 ¹	12.70	room temp.	1.4442-1.4843	2.96	1.5001-1.6047	6.97	2.77	4.322
18 ³	10.61	room temp.	1.4478-1.5059	3.40	1.5331-1.6050	6.14	1.07	4.665
19 ³	15.90	room temp.	1.4378-1.4971	6.05	1.5083-1.6005	7.13	2.72	4.647
20 ³	12.20	70	1.4317-1.5050	5.12	1.5219-1.5951	5.06	2.02	3.672
21 ³	16.36	70	1.4361-1.5079	6.02	1.5179-1.5968	9.11	1.23	5.989
22 ³	17.75	70	1.4386-1.5087	5.17	1.5218-1.5989	11.22	22	1.36
23 ³	17.14	70	1.4462-1.4988	3.89	1.5283-1.5916	12.24	20	1.01
24 ³	5.45	70	1.4480-1.5044	1.53	1.5449-1.5953	3.52	10	0.40
25 ⁴	16.42	85	1.4375-1.4769	2.20	1.5415-1.5970	12.73	23	1.49
26 ⁴	17.48	85	1.4395-1.4941	2.36	1.5228-1.5983	13.50	28	1.62
27 ⁴	17.55	85	1.4390-1.5000	2.25	1.5195-1.6014	13.59	23	1.71
28 ⁴	19.23	90	1.4349-1.4857	2.96	1.5100-1.6025	14.58	25	1.69
29 ⁴	10.19	90	1.4375-1.4941	2.03	1.5251-1.6040	7.00	12	1.16
30 ⁴	2.90	95	1.4698	0.40	1.5489-1.6015	2.30	6	0.20
31 ⁴	7.88	95	1.4572-1.4743	0.93	1.5359-1.6027	5.98	11	0.97
32 ⁴	5.96	95	1.4509-1.4888	1.42	1.5421-1.5998	3.76	7	0.78
33 ⁴	7.66	95	1.4537-1.5048	2.91	1.5232-1.5978	4.84	8	2.931
34 ⁴	8.33	95	1.4591-1.4916	1.13	1.5172-1.5960	6.17	11	2.870
35 ⁴	6.00	95	1.4587-1.4895	1.40	1.5189-1.5933	3.93	6	3.739
36 ⁴	5.99	95	1.4555-1.5136	1.64	1.5460-1.6009	3.88	8	2.865
37 ⁴	8.74	95	1.4565-1.5171	1.66	1.5340-1.5982	6.07	12	3.622
38 ⁴	8.71	100	1.4570-1.4878	1.46	1.5265-1.5938	6.70	14	0.55
39 ⁴	8.69	100	1.4551-1.4710	1.26	1.5103-1.5951	6.67	13	0.76
40 ⁴	8.34	100	1.4457-1.4865	1.88	1.5184-1.6000	6.09	13	0.67
41 ⁴	8.58	100	1.4391-1.4841	1.88	1.5200-1.6008	5.80	14	0.90
42 ⁴	8.44	100	1.4392-1.4790	2.22	1.5160-1.6052	5.70	17	0.52
43 ⁴	8.62	100	1.4390-1.4820	1.98	1.5128-1.6065	6.19	14	0.45
44 ⁴	8.83	100	1.4473-1.4895	1.98	1.5126-1.6112	6.83	20	0.50
45 ⁴	3.14	100	1.4495-1.4669	0.49	1.5173-1.5851	2.19	8	0.46

1 Desorbent: isopropyl alcohol.
 2 Desorbent: butyl alcohol.
 3 Desorbent: isobutyl alcohol.
 4 Desorbent: cyclohexanol.

TABLE 4. - Identification of components producing elution peaks in the GLC of two aromatic cuts from distillate fractions 10 + 11 and 26

Peak No.	Relative retention at 220°	Compound identified by I. R.	Relative retention of authentic specimen at 220°
1	1.98	Not identified	--
2	2.08	2-Methylnaphthalene	2.10
3	2.29	1-Methylnaphthalene	2.28
4	2.47	Diphenyl ether	2.47
5	2.56	Biphenyl	2.60
6	2.91	2-Ethylnaphthalene	2.93
7	3.18	{ 2,7-Dimethylnaphthalene	3.13
		{ 2,6-Dimethylnaphthalene	3.17
8	3.30	{ 1,7-Dimethylnaphthalene	3.29
		{ 1,3-Dimethylnaphthalene	3.43
9	3.46	{ 1,6-Dimethylnaphthalene	3.43

TABLE 5. - Analysis of individual aromatic hydrocarbons boiling up to 280° in neutral oil distillate fractions

Compounds identified	Method of identification	Total wt, g	Wt pct in neutral oil ¹
Methylbenzene	Rel. retention	1	Trace
Ethylbenzene	Rel. retention	2	Trace
1,3- and 1,4-Dimethylbenzene	Rel. retention	9	Trace
1,2-Dimethylbenzene	Rel. retention	20	Trace
Isopropylbenzene	Rel. retention	79	Trace
n-Propylbenzene	Rel. retention, I. R.	250	0.002
1-Methyl-3-ethylbenzene	Rel. retention, I. R.	0.010	0.001
1-Methyl-4-ethylbenzene	Rel. retention, I. R.	0.0098	0.001
1-Methyl-2-ethylbenzene	Rel. retention, I. R.	0.0075	0.001
1,2,3-Trimethylbenzene	Rel. retention, I. R.	0.3105	0.045
1,2,4-Trimethylbenzene	Rel. retention, I. R.	0.2695	0.039
1,3,5-Trimethylbenzene	Rel. retention, I. R.	0.1184	0.017
1-Methyl-4-isopropylbenzene	Rel. retention, I. R.	0.0596	0.009
1-Methyl-3-isopropylbenzene	Rel. retention, I. R.	0.0511	0.007
1-Methyl-2-isopropylbenzene	Rel. retention, I. R.	0.0164	0.002
1,2-Diethylbenzene	Rel. retention, I. R.	0.0857	0.012
1,3-Diethylbenzene	Rel. retention, I. R.	0.1009	0.015
1,4-Diethylbenzene	Rel. retention	0.0062	0.001
1,2-Dimethyl-4-ethylbenzene	Rel. retention-bp correlation, I. R.	1.8139	0.260
1,4-Dimethyl-2-ethylbenzene	Rel. retention-bp correlation, I. R.	0.7698	0.110
1,3-Dimethyl-5-ethylbenzene	Rel. retention, I. R.	1.0872	0.156
1,2-Dimethyl-3-ethylbenzene	Rel. retention-bp correlation, I. R.	0.5938	0.085
1-Methyl-3-n-propylbenzene	Rel. retention, I. R.	0.3180	0.046
1-Methyl-2-n-propylbenzene	Rel. retention, I. R.	0.0753	0.011
1,2,4,5-Tetramethylbenzene	Rel. retention, I. R.	1.1066	0.159
1,2,3,5-Tetramethylbenzene	Rel. retention, I. R.	1.7690	0.253
1,2,3,4-Tetramethylbenzene	Rel. retention-bp correlation, I. R.	1.0681	0.153
Indene	Rel. retention, I. R.	0.2331	0.033
3-Methylindene	I. R.	0.7141	0.102
Indan	Rel. retention, I. R.	0.3945	0.057
1-Methylindan	Rel. retention-bp correlation, I. R.	1.1265	0.161
5-Methylindan	Rel. retention-bp correlation, I. R.	1.7566	0.251
4-Methylindan	Rel. retention-bp correlation, I. R.	1.7389	0.249
1,3-Dimethyl-2-n-propylbenzene	Rel. retention-bp correlation	0.0173	0.003
1,2-Dimethyl-3-n-propylbenzene	Rel. retention-bp correlation, I. R. -structural correlation	0.2976	0.042
1,4-Dimethyl-2-n-propylbenzene	Rel. retention-bp correlation, I. R. -structural correlation	0.5974	0.084
1,4-Dimethyl-2-isopropylbenzene	Rel. retention-bp correlation	0.1151	0.017
1-Methyl-3,5-diethylbenzene	Rel. retention, I. R.	0.2393	0.034
1-Methyl-2,4-diethylbenzene	Rel. retention-bp correlation, I. R. -structural correlation	0.9873	0.141
Styrene	I. R.	0.0332	0.005
4-Methylstyrene	I. R.	0.0225	0.003
β -Methylstyrene (trans)	Rel. retention, I. R.	0.1396	0.020
3-Phenyl-1-butene	I. R.	0.1163	0.017
1,2,3,4-Tetrahydronaphthalene	Rel. retention, I. R.	0.6170	0.088
Naphthalene	I. R.	6.3853	0.914

See footnote at end of table.

TABLE 5. - Analysis of individual aromatic hydrocarbons boiling up to 280° in neutral oil distillate fractions - Continued

Compounds identified	Method of identification	Total wt, g	Wt pct in neutral oil ¹
Benzofuran	Rel. retention, I. R.	0.0991	0.014
5-Methylbenzofuran }	I. R.	0.1432	0.021
6-Methylbenzofuran }			
2-Methylbenzofuran }			
3-Methylbenzofuran }	I. R.	0.1681	0.024
7-Methylbenzofuran			
1,6-Dimethylindan	Rel. retention-bp correlation, I. R.	2.3746	0.340
4,7-Dimethylindan	Rel. retention-bp correlation, I. R.	1.3034	0.186
3-Ethylindene	Rel. retention, I. R.	1.3126	0.188
2-Ethylindene	Rel. retention, I. R.	1.3032	0.186
2,3-Dimethylindene	Rel. retention, I. R.	1.7762	0.254
2-Methyl-1,2,3,4-tetrahydro-naphthalene	I. R.	1.0426	0.149
6-Methyl-1,2,3,4-tetrahydro-naphthalene	I. R.	0.4958	0.071
1-Methylnaphthalene	Rel. retention, I. R.	12.0615	1.728
2-Methylnaphthalene	Rel. retention, I. R.	16.1630	2.315
1-Ethyl-naphthalene	Rel. retention, I. R.	1.9777	0.283
2-Ethyl-naphthalene	Rel. retention, I. R.	3.1184	0.456
2,7-Dimethylnaphthalene	Rel. retention, I. R.	4.8187	0.690
1,7-Dimethylnaphthalene	Rel. retention, I. R.	4.7915	0.686
2,6-Dimethylnaphthalene	Rel. retention, I. R.	4.1664	0.596
1,6-Dimethylnaphthalene	Rel. retention, I. R.	6.4648	0.926
1,3-Dimethylnaphthalene	Rel. retention, I. R.	6.5617	0.940
2,3-Dimethylnaphthalene	Rel. retention, I. R.	3.8247	0.547
1,5-Dimethylnaphthalene	Rel. retention, I. R.	3.6861	0.528
1,2-Dimethylnaphthalene	Rel. retention, I. R.	3.5632	0.510
1,4-Dimethylnaphthalene	Rel. retention-bp correlation, I. R.	0.0979	0.014
2-Methyl-6-ethylnaphthalene }	Rel. retention-bp correlation, U. V. and I. R. - structural correlations	3.9029	0.559
2-Methyl-7-ethylnaphthalene }			
1-Methyl-7-ethylnaphthalene and/or			
1-Methyl-6-ethylnaphthalene }	U. V. and I. R. - structural correlations	3.2925	0.471
1,3,6-Trimethylnaphthalene			
1,3,7-Trimethylnaphthalene	Rel. retention-bp correlation, U. V.	0.7338	0.105
1,2,6-Trimethylnaphthalene }	Rel. retention, I. R.	0.452	0.064
1,2,7-Trimethylnaphthalene }			
Biphenyl	Rel. retention, I. R.	18.8235	2.696
4-Methylbiphenyl	Rel. retention, I. R.	0.7271	0.104
3-Methylbiphenyl	Rel. retention, I. R.	1.2431	0.178
Cyclohexyl benzene	Rel. retention, I. R.	0.2769	0.039
2a,3,4,5-Tetrahydroacenaphthene	Rel. retention, I. R.	1.1713	0.167
Acenaphthylene	Rel. retention, I. R.	0.6963	0.099
Acenaphthene	Rel. retention, I. R.	2.336	--
Diphenyl ether	Rel. retention, I. R.	38.5897	5.528
2,3-Dimethylbenzofuran	I. R. - structural correlation	0.1778	0.025
Dimethylbenzofuran II	I. R. - structural correlation	1.7848	0.255
Dimethylbenzofuran III	I. R. - structural correlation	0.6451	0.092
Dibenzofuran	Rel. retention, I. R.	1.4718	--

¹ Total neutral oil distilling up to about 360°, representing 16.92 weight-percent of the total tar.

TABLE 6. - Analysis of individual C₁₀-C₁₆ n-paraffins, isoparaffins and α -olefins in neutral oil distillate fractions

Compounds identified	Method of identification	Total wt, g	Wt pct in neutral oil ¹
n-Decane	Rel. retention, I. R.	0.2481	0.036
n-Undecane	Rel. retention, I. R.	1.4842	0.213
n-Dodecane	Rel. retention, I. R.	6.6226	0.949
n-Tridecane	Rel. retention, I. R.	11.2807	1.62
n-Tetradecane	Rel. retention, I. R.	5.5026	0.788
n-Pentadecane	Rel. retention, I. R.	7.3638	1.06
n-Hexadecane	Rel. retention, I. R.	3.7244	0.534
	Total		5.200
2-Methyl nonane	Bp and I. R. - structural correlation	0.1551	0.022
2-Methyl decane	Rel. retention, I. R.	0.2356	0.034
2-Methyl undecane	Bp and I. R. - structural correlation	0.8742	0.125
2-Methyl dodecane	Bp and I. R. - structural correlation	1.4344	0.206
2-Methyl tridecane	Bp and I. R. - structural correlation	1.4000	0.201
2-Methyl tetradecane	Bp and I. R. - structural correlation	2.9188	0.418
2-Methyl pentadecane	Bp and I. R. - structural correlation	0.1367	0.020
	Total		1.026
1-Decene	Rel. retention, I. R.	0.1595	0.023
1-Undecene	Rel. retention, I. R.	1.1871	0.170
1-Dodecene	Rel. retention, I. R.	1.4485	0.208
1-Tridecene	Rel. retention, I. R.	4.5744	0.655
1-Tetradecene	Rel. retention, I. R.	4.3582	0.624
1-Pentadecene	Rel. retention, I. R.	2.8693	0.411
1-Hexadecene	Rel. retention, I. R.	2.1243	0.304
	Total		2.395

¹ Total neutral oil distilling up to about 360°, representing 16.92 weight-percent of the total tar.

TABLE 7. - Physical properties and other data for resins from low-temperature coal tars

Resin No.	Source	Extraction scheme		Yield, weight percent ¹	Molecular weight, M
		Soluble in:	Insoluble in:		
1 A	Bituminous pitch	quinoline	benzene	4.3	628
1 B		benzene	pet. ether ²	64.8	383
2 A	Lignite tar	quinoline	benzene	1.7	510
2 B		benzene	pet. ether ²	22.5	391
3 A	Subbituminous pitch	quinoline	benzene	18.3	603
3 B		benzene	pet. ether ²	40.1	482
4 B	Subbituminous pitch	benzene ³	pet. ether ²	35.8	476 ⁴
4 B'					410 ⁵

Resin No.	Density, d_4^{20}		Refractive index, n_D^{20}	Weight percent		
	As a "solid"	From pyridine solutions		C	H	O ⁷
1 A	1.326	1.326	1.694	76.3	5.3	15.3
1 B	1.129	1.130	1.642	84.3	7.5	6.3
2 A	1.255	--	1.669	81.9	4.3	9.5
2 B	1.155	1.154	1.641	79.4	7.2	11.9
3 A	1.261	1.259	1.669	76.0	5.9	13.5
3 B	1.201	1.200	1.653	78.5	6.7	14.3
4 B	1.159	1.156	1.653	78.8	7.4	10.6
4 B'	1.140	1.141	1.639	81.1	7.8	10.2

¹ On the basis of the specified source.

² Petroleum ether, boiling range 100° to 115°C.

³ Ratio of solvent to pitch for these two resins: benzene 4 to 1, petroleum ether 20 to 1; ratios for all other resins 25 to 1.

⁴ Powdery fraction.

⁵ Semi-solid fraction.

⁶ From pyridine solutions.

⁷ By direct oxygen determination.

TABLE 8. - Number and arrangement of rings in low-temperature tar resins

Resin No.	Ring analysis			Approximate average molecular formula ¹	Corrected ²		Ring arrangement	
	R _T	R _A	R _N		R/C	H/C	Series	Representative hydrocarbon ³
1A	12.6	5.5	7.1	C ₄₀ H ₃₃ O ₆	0.27	0.99	VII	Octadecahydrodiphenanthrocoronene
1B	5.4	3.8	1.6	C ₂₇ H ₂₃ O ₂	0.19	1.11	I	Hexahydroheptamethylpicene
2A	10.1	4.1	6.0	C ₃₅ H ₂₂ O ₃	0.27	0.74	VII	Octahydromethylbenzonaphthocoronene
2B	4.6	3.8	0.8	C ₂₈ H ₂₃ O ₂	0.16	1.18	I	Tetrahydroheptamethylpicene
3A	10.3	5.1	5.2	C ₃₈ H ₃₀ O ₅	0.24	1.06	VII	Hexadecahydrohexamethylbenzonaphthocoronene
3B	6.2	4.5	1.7	C ₃₂ H ₃₂ O ₄	0.17	1.14	I	Tetrahydrodecamethylbenzopicene
4B	5.8	5.0	0.8	C ₃₁ H ₃₅ O ₃	0.17	1.21	I	Octahydrooctamethylbenzopicene
4B'	4.9	4.0	0.9	C ₂₈ H ₃₂ O ₃	0.16	1.23	I	Tetrahydrononamethylpicene

¹ Smaller amounts of nitrogen and sulfur not included.

² Corrected for oxygen only.

³ Picene is given as an example of a linear ring arrangement in Series I; coronene is given as an example of a globular ring arrangement in Series VII; all oxygen atoms, including phenolic oxygen and heterocyclic oxygen, in the resin are rendered as CH₂ groups in these representative hydrocarbons.

TABLE 9. - Relative retentions and infrared absorption bands of pyrolysis products from a subbituminous coal tar resin

Compound	Relative retention ¹		GLC peak No.	Some observed I. R. bands, wavelength, μ	Weight-percent ²
	Pure	Pyrolysis product			
Methane	0.37	0.37	1		
		0.43	2		
		0.49	3		
		0.57	4		
1-Pentene ³	0.60	0.59	5		9.7
2-Methyl-1-pentene ³	0.70	0.71	6		2.7
2,2,4-Trimethylpentane	0.93	0.93	7	7.33, 7.90, 8.03, 8.32, 8.57, 10.21	24.7
Benzene	1.00	1.00	8	2.44, 3.20, 3.25, 5.12, 5.52, 9.65, 14.85	19.3
2,3,4-Trimethylpentane	1.15	1.15	9	7.25, 7.32, 8.93, 9.30, 10.07, 10.32, 10.92	26.9
2,2,4,4-Tetramethylpentane	1.23	1.23	10	8.03, 8.54, 10.28	7.0
Toluene	1.37	1.37	11	9.28, 9.71, 13.74, 14.43	3.5
2,6-Dimethyl-1,4-heptadiene ³	1.53 ⁴	1.55	12		0.5
p-Xylene	1.92	1.93	13	8.95, 12.60 (para)	0.9
m-Xylene			14	8.57, 9.13, 13.02, 14.53 (meta)	2.1
o-Xylene	2.14	2.15		7.22, 8.96, 9.53, 9.81, 13.46	2.7
					100.0

¹ Relative to benzene on Apiezon L grease at 220°C.

² On the basis of the total liquid pyrolysis products.

³ This compound is typical of several equally likely possibilities.

⁴ Retention obtained from log retention-boiling point correlations.

TABLE 10.-Relative retentions and infrared absorption bands of
 Pyrolysis products from a bituminous coal tar resin

Compound	Relative retention ¹		GLC peak No.	Some observed I.R. bands, wavelength, μ		Weight- percent
	Pure	Pyrolysis product		Pure	Resin	
Methane	0.37	0.37	1			
		0.57	2			
		0.59	3			
		0.62	4			
2-Methylpentane	0.70	0.73	5	8.53, 8.70, 13.51	8.55, 8.72, 13.56	4.1
2, 2, 4-Trimethylpentane	0.94	0.95	6	7.33, 7.81, 8.03, 8.32, 8.58, 10.22	7.33, 7.81, 8.03, 8.32, 8.58, 10.23	16.0
Benzene	1.00	1.00	7	2.44, 5.12, 5.52, 9.68, 14.85	2.44, 5.12, 5.52, 9.68, 14.88	32.9
2, 3, 4-Trimethylpentane	1.15	1.17	8	7.23, 7.30, 8.93, 9.31, 10.05, 10.29, 10.92	7.25, 7.33, 8.94, 9.32, 10.06, 10.32, 10.93	26.6
2, 3, 3-Trimethylpentane ²	1.19			9.20, 9.95, 12.88 ³	9.22, 9.97, 12.93	3.0
2, 2, 4, 4-Tetramethylpentane	1.25	1.26	9	8.05, 8.55, 10.28, 10.93	8.05, 8.55, 10.30, 10.94	7.0
Toluene	1.37	1.39	10	9.26, 9.70, 13.74, 14.43	9.28, 9.72, 13.79, 14.48	5.9
2, 2, 3, 4-Tetramethylpentane ²	1.54	1.57	11	8.33, 8.98, 9.22 ³	8.34, 9.00, 9.24	2.3
p-Xylene		1.94	12	8.93, 12.57	8.95, 12.61 (para)	1.2
m-Xylene		1.92		8.54, 9.13, 13.01, 14.50	8.55, 9.14, 13.04, 14.54 (meta)	0.4
o-Xylene		2.14	13	8.95, 9.78, 13.47	8.96, 9.80, 13.50 (ortho)	0.6
						100.0

¹ Relative to benzene on Aplexon L grease at 220°C.

² Retention obtained from log retention-boiling point correlations.

³ Bands obtained from A. P. I. Project 44 spectra.

TABLE 11. - Comparison of relative amounts of pyrolysis products from bituminous and subbituminous coal tar resins

Compound	Weights relative to 2,3,4-trimethylpentane	
	Bituminous	Subbituminous
1-Pentene	0.15	0.36
2-Methylpentane	0.15	0.10
2-Methyl-1-pentene	0.60	0.92
2,2,4-Trimethylpentane	1.23	0.72
Benzene	1.00	1.00
2,3,4-Trimethylpentane	0.11	0.26
2,2,4,4-Tetramethylpentane	0.26	0.26
Toluene	0.22	0.13
2,2,3,4-Tetramethylpentane	0.09	0.02
2,6-Dimethyl-1,4-heptadiene	0.04	0.03
p-Xylene	0.01	0.08
m-Xylene	0.02	0.10
o-Xylene		

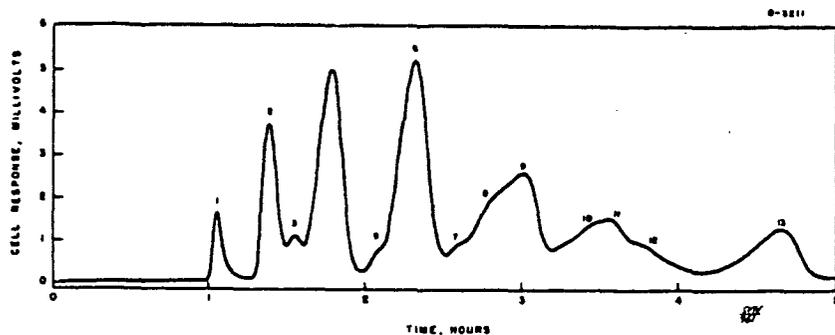


Figure 1. - Chromatogram of Tar Acids From Tar Distillate.

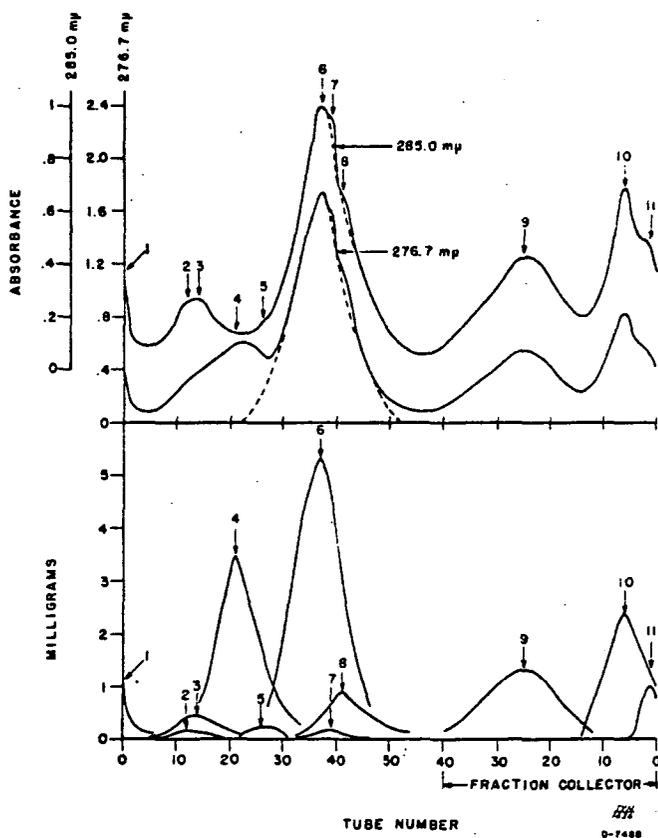


Figure 2. - Countercurrent Distribution of Tar Acids
Boiling 238°-251°C; 100 Transfers;
pH 11.58.

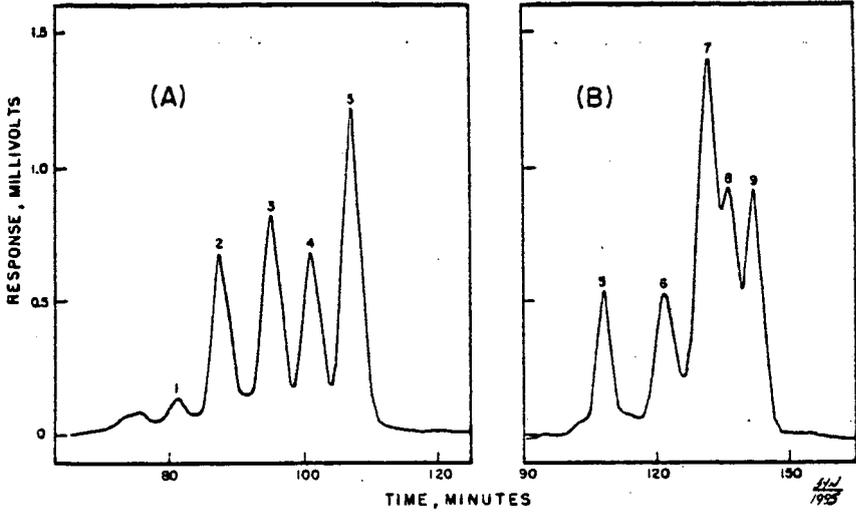


Figure 3. - Chromatograms of Two Aromatic Cuts Obtained From Distillate Fractions 10 + 11 (A) and 26 (B).

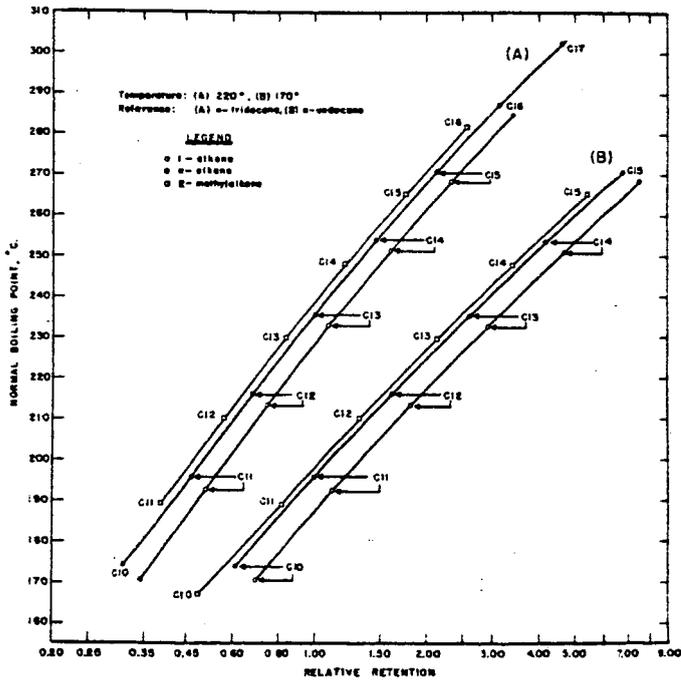


Figure 4. - Correlations Between Boiling Points and Relative Retentions of C₁₀-C₁₆ n-Paraffins, Isoparaffins and α -Olefins on Polyphenyl Ether.

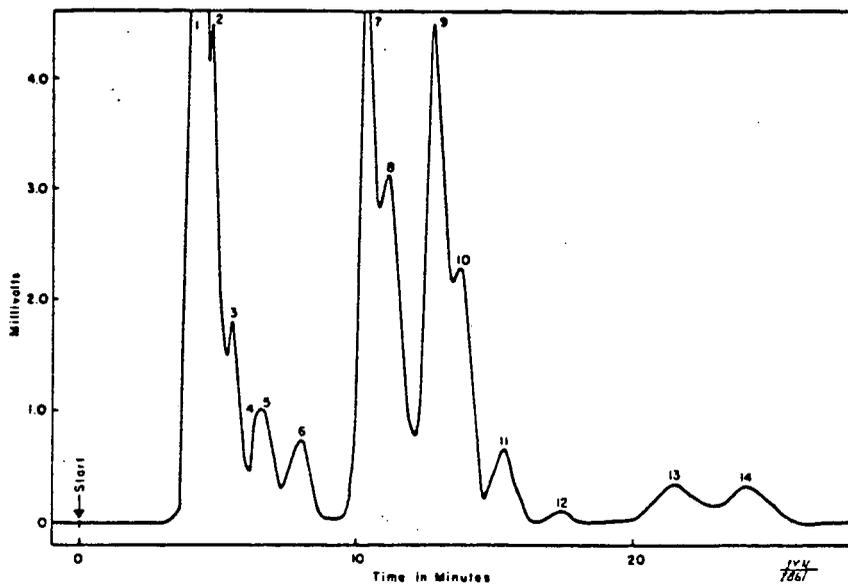


Figure 5. - Chromatogram of Pyrolysis Products From a Subbituminous Coal Tar Resin.

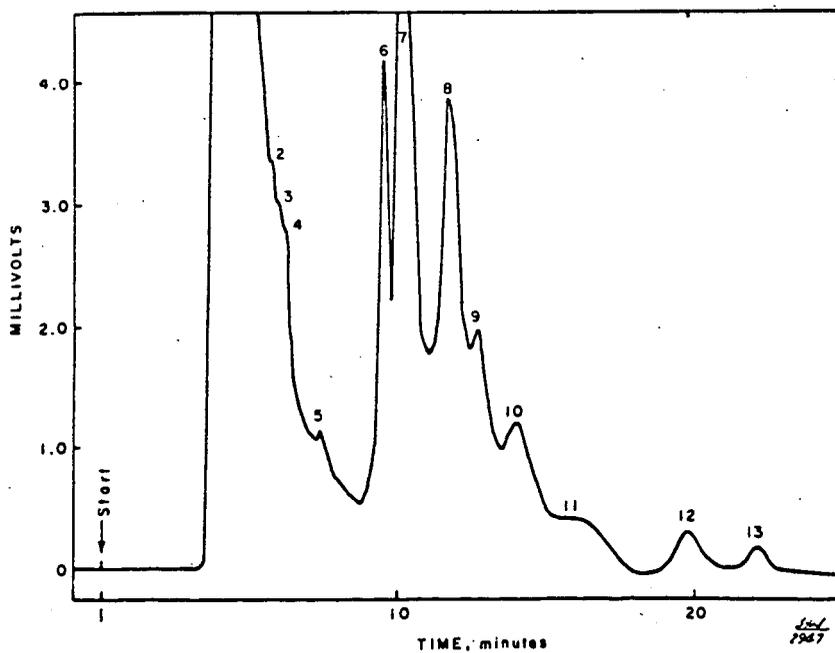


Figure 6. - Chromatogram of Pyrolysis Products From a Bituminous Coal Tar Resin.

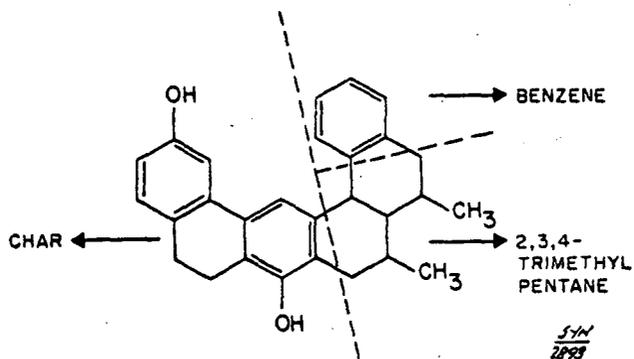


Figure 7. - A Representation of the Pyrolysis of a Hypothetical Resin Molecule.

PRESENT AND FUTURE SUPPLY OF COAL CHEMICALS FROM PETROLEUM SOURCES

Vladimir Haensel and Nick Mechaes

Universal Oil Products Company
Des Plaines, Illinois

In a discussion of the chemistry and the supply of coal chemicals from petroleum sources, it is essential to define the terminology. In this discussion, coal chemicals will include:

- I The light oil fraction boiling up to 200°C and including primarily benzene, toluene and the mixed xylenes.
- II The middle oil fraction, boiling point (BP) 200-250°C, one of the major components of the total liquid fraction, consisting of tar acids such as phenol, cresols, xylanols as well as higher tar acids. This fraction also contains tar bases such as quinoline. The major component of the middle oil fraction is naphthalene and methylnaphthalene.
- III The heavy oil fraction, BP 250-300°C, containing dimethylnaphthalenes and acenaphthene.
- IV The anthracene oil, BP 300-350°C, containing fluorene, phenanthrene, anthracene and carbazole.

A. Light Oil - Supply Aspects

1. Benzene

Until 1950, benzene produced from coke-ovens and by tar distillers was sufficient for chemical requirements, with imports helping to supply peak demands. When military requirements increased rapidly during the Korean "emergency" and by-product coke-oven capacity was inadequate, petroleum refiners stepped in to take up the slack. The first benzene produced from petroleum appeared in 1950, and in 1961 petroleum benzene accounted for better than 75% of the total production. Table 1 presents historical data on the production and sales of benzene.

The end-use pattern of benzene given in Table 2 is quite extensive, with the main markets being in styrene, phenol, synthetic fibers and synthetic detergents. There will be some market changes, however. Use of benzene to make nylon and detergents has been levelling off at an annual growth rate of 3 to 5%. In the future, the big markets will be styrene and phenol.

In 1961, benzene production and sales were 545 and 431 million gallons, respectively. It is expected that by 1971, production will amount to approximately 840 million gallons, a 4.4% annual increase. The past and estimated future benzene production figures are presented graphically in Figure 1.

Table 1 - BENZENE PRODUCTION AND SALES, 1950-1961

Year	Production				Sales
	Tar Dist.	Coke-Oven	Petroleum	Total	
1950	22.0	162.2	10.1	194.3	172.6
1951	19.0	178.0	32.6	229.5	239.2
1952	19.0	155.1	35.5	209.6	217.0
1953	19.0	178.8	63.0	260.8	232.7
1954	15.0	142.8	91.9	249.7	202.0
1955	15.0	174.2	98.6	287.8	264.8
1956	15.0	174.4	111.6	301.0	284.5
1957	13.0	181.1	116.2	310.2	276.5
1958	9.0	119.8	142.1	270.8	243.3
1959	10.0	120.3	208.8	339.1	330.5
1960	12.8	135.3	309.2	457.3	377.4
1961	12.4	120.2	412.8	545.4	431.0

-0-

Table 2 - BENZENE END-USE PATTERN AS OF 1960

	Percent of Total
Aniline	4.1
Benzene Hexachloride	0.4
DDT	4.1
Maleic Anhydride	2.8
Nylon	7.8
Phenol	23.4
Styrene	47.4
Synthetic Detergents	7.0
Dichlorobenzene	2.3
Other Non-Fuel Uses	0.5
Motor Grade	0.2
	<u>100.0</u>

-0-

2. Toluene

Toluene from petroleum sources has attained a very important status in the past decade. Of the 260 million gallons of toluene produced in 1961, 88% were petroleum derived, with the remainder supplied by coke-ovens and tar distillers. In 1950, petroleum toluene accounted for only 54% of the 84 million gallons produced. Table 3 presents historical production-sales trends for toluene.

The largest end-use for toluene as of 1960, as shown in Table 4, is as a high octane blending agent in motor and aviation gasolines. This outlet, however, is declining rapidly because of the advent of jet aircraft and the emphasis on regular-gasoline economy. These facts, along with a benzene shortage, combined for a time to create a disposal problem for refiners and made the conversion of toluene into benzene by hydrodealkylation an attractive process. This has resulted in an increase in benzene production which has satisfied the present demand. Other uses of

Table 3 - TOLUENE PRODUCTION AND SALES, 1950-1961

Year	Production				Sales
	Tar Dist.	Coke-Oven	Petroleum	Total	
1950	7.7	30.7	45.5	83.9	70.3
1951	11.4	34.3	55.7	101.4	82.4
1952	10.8	30.5	64.0	105.3	87.5
1953	4.7	36.0	115.5	156.2	90.9
1954	2.9	33.4	122.9	159.2	126.2
1955	3.9	38.2	143.4	185.5	138.3
1956	5.6	37.2	130.8	173.6	135.2
1957	4.7	38.0	154.9	197.6	130.0
1958	4.2	28.0	207.4	239.6	136.6
1959	3.7	26.9	251.0	281.6	166.8
1960	3.2	30.4	240.8	274.4	200.1
1961	3.1	28.5	228.3	259.9	162.9

-θ-

Table 4 - TOLUENE END-USE PATTERN AS OF 1960

	Percent of Total
Motor Gasoline	50.5
Aviation Gasoline	18.6
Solvents (chiefly for Nitrocellulose Lacquers)	13.6
TNT	2.3
Detergents (Toluene Sulfonates)	1.8
Toluene Diisocyanate	1.4
Benzene*	0.4
Miscellaneous Chemicals (Benzoic Acid, Benzaldehyde, Benzoyl Chloride, Phenol, etc.)	11.4
	100.0

* In 1961, with the installation of many hydrodealkylation units by various companies, the consumption of toluene for benzene production was expected to increase to 60 million gallons. 1960 consumption was 1 million gallons.

-θ-

toluene shown in Table 4 are in the manufacture of chemicals, such as toluene diisocyanate and toluene sulfonate, and as a solvent for paints and nitrocellulose lacquers.

The present requirements of toluene also appear to be met. However, the development of additional processes, such as Dow's phenol-from-toluene process and DuPont's caprolactam-from-toluene process may play a major role in increasing the demand for more toluene. It is expected that by 1971, toluene production will amount to 450 million gallons, a 5.6% yearly increase. The past and estimated future toluene production figures are also presented in Figure 1.

3. Xylenes

The xylene aromatics are coal-tar chemicals which are also derived from petroleum and are being extracted by refiners and separated for chemical consumption to an increasing extent. Of

the 257 million gallons of mixed xylenes produced in 1961, 96.9% were derived from petroleum, 2.9% from coke-ovens and 0.2% from tar distillers, as will be seen from Table 5.

Table 5 - MIXED XYLENES PRODUCTION AND SALES, 1950-1961.

Year	Production				Sales
	Tar Dist.	Coke-Oven	Petroleum	Total	
1950	1.5	8.0	62.4	71.9	56.4
1951	2.2	9.1	64.4	75.7	58.5
1952	2.1	8.1	61.6	71.8	57.8
1953	0.7	9.9	102.9	113.5	65.6
1954	0.5	10.0	99.7	110.2	66.5
1955	0.6	11.3	96.1	108.0	77.6
1956	1.9	10.3	124.1	136.3	85.3
1957	1.3	10.8	115.1	127.2	83.0
1958	0.6	8.4	191.5	200.5	95.1
1959	0.5	7.5	233.5	241.5	128.8
1960	0.4	8.1	274.0	282.5	141.5
1961	0.5	7.6	249.2	257.3	124.0

-0-

The major outlets for xylenes are in fuels, solvents and chemical uses, shown in Table 6. Gasoline octane improvement is the largest outlet for xylenes, and nothing will change this for a long time. Xylenes face the same problems as toluene, with aviation gasoline demand decreasing and motor gasoline needs being somewhat indefinite at the present time. Solvent uses claim approximately 17% of the mixed xylenes production.

Table 6 - XYLENES END-USE PATTERN AS OF 1960

	Percent of Total
Gasoline	61.0
Solvents	17.5
<u>ortho</u> -Xylene	6.3
<u>meta</u> -Xylene	1.7
<u>para</u> -Xylene	9.6
Miscellaneous Chemicals (Herbicides, Plasticizers, Chlorinated Xylene, etc.)	3.9
	<u>100.0</u>

-0-

For chemical synthesis, the xylenes fraction is separated into the pure isomers -- ortho, meta, and para -- the consumption of which is shown in Table 7 for 1959 - 1961. Ethylbenzene is also obtained during the separation process. Composition of a petroleum derived mixed-xylenes stream is variable but generally contains the three isomers and ethylbenzene in the following proportions:

Ethylbenzene	8.6 - 13.2 %
<u>para</u> -Xylene	17.1 - 20.3 %
<u>meta</u> -Xylene	45.5 - 52.2 %
<u>ortho</u> -Xylene	18.0 - 24.4 %

Table 7 - XYLENE ISOMERS CONSUMPTION 1959 - 1961

Year	Millions of Gallons		
	Consumption		
	<u>ortho-Xylene</u>	<u>meta-Xylene</u>	<u>para-Xylene</u>
1959	8.4	2.1	22.0
1960	16.3	4.4	24.8
1961	22.3	5.5	26.5

-0-

a. Para-Xylene

Para-xylene is currently the most important of the xylene isomers. Recent production of para-xylene is 280 million pounds (39 million gallons) per year. It is used primarily to make terephthalic acid which is usually sold as the dimethyl terephthalate ester for the production of polyesters such as DuPont's Dacron fiber and Mylar film.

b. Ortho-Xylene

Ortho-xylene is the second-most important isomer and could become another major feedstock for phthalic anhydride, now that improved catalyst and plant designs have increased yields to a respectable level. In the past, ortho-xylene was considered a poor substitute for naphthalene because the yield was only half of the theoretical of 1.39 lb/lb of feed, while naphthalene yielded three-fourths of the 1.16 lb/lb theoretical. Present ortho-xylene capacity is 650 million pounds per year. About 80% of the future production from these facilities is destined for export to Europe and Japan where it will be used to make phthalic anhydride.

c. Meta-Xylene

The most plentiful isomer, meta-xylene, which makes up about 50% of the xylene isomer mixture, is the least useful. Meta-xylene is used to make isophthalic acid, which competes with phthalic anhydride for the reinforced plastic and plasticizer market. One refiner separates meta-xylene for isophthalic acid production and another produces isophthalic from mixed xylenes along with terephthalic acid. The chief use for meta-xylene is for solvent and gasoline blending after the more valuable xylenes have been extracted.

The past and estimated future production figures for xylenes are shown graphically in Figure 1.

B. Light Oil - Chemistry and Chemical Engineering Aspects

The chemistry and chemical engineering of the production of light oil aromatics from petroleum are of considerable interest. The problem is that of the conversion of a suitable raw material and the separation of the aromatics from the residual paraffinic and naphthenic hydrocarbons. Although the chemistry of the production of benzene from petroleum sources is very similar to that of the production of toluene and xylenes, some subtle differences do exist in both chemical and the chemical engineering aspects of the problem.

In the case of benzene, a suitable raw material is one which contains substantial proportions of cyclohexane and methylcyclopentane. Table 8 shows the composition of the fraction which contains the two benzene precursors in various straight-run gasolines.⁽¹⁾ It will be observed that the total naphthenes will vary from approximately 20 to about 55 percent of the total fraction and


this fraction in return ranges from about 10 to 18 percent of the total C₅ to 360°F gasoline. This table indicates that the potential benzene production from straight-run gasoline is extremely high, to say nothing of the substantial amounts of methylcyclopentane and cyclohexane being currently produced synthetically by the hydrocracking processes which are now coming into commercial operation.

Table 8 - COMPOSITION OF 140-185°F FRACTIONS FROM VARIOUS STRAIGHT-RUN GASOLINES

Hydrocarbon, Vol.-%	Source						
	Ponca City Okla.	East Texas	Bradford Pa.	Greendale Mich.	Winkler Texas	Midway Calif.	Conroe Texas
2-Methylpentane	9	15	22	7	17	14	11
3-Methylpentane	8	12	13	5	42	10	8
n-Hexane	41	31	37	63	11	16	17
2, 2 & 2, 4-Dimethylpentane	2	6	6	2	8	4	3
Methylcyclopentane	20	23	9	9	15	34	21
Cyclohexane	16	12	12	11	6	21	31
Benzene	4	1	1	3	1	1	9
Total Naphthenes	36	35	21	20	21	55	52
Percent of 140-185°F Fraction Based on C ₅ -360°F Gasoline	13	16	15	18	10	12	14

-0-

As mentioned earlier, some benzene is also produced by the hydrodealkylation of toluene. Various processing schemes have been proposed. The Hydeal* process is a catalytic operation which converts toluene concentrates into benzene in the presence of recycled hydrogen. Since the process consumes hydrogen in the formation of benzene and methane, as shown by the equation:

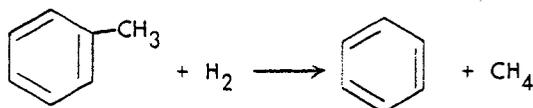


the units are equipped with internal hydrogen enrichment facilities so that the available hydrogen in the make-up gas can be utilized efficiently.


Another possible source of benzene is represented by the normal hexane which is a substantial component of the straight-run fractions. In fact, some of the early work in catalytic reforming has been directed on the dehydrocyclization of normal hexane to benzene and normal heptane to toluene. However, it should be pointed out that under conditions which induce a very high conversion of the naphthenic hydrocarbons to benzene, the conversion of hexane to benzene is very slight. Consequently, the bulk of the benzene is derived at the present time by processing fractions containing methylcyclopentane and cyclohexane.

The chemistry of the conversion of cyclohexane and methylcyclopentane is of considerable interest. Cyclohexane can be converted to benzene in the presence of a platinum-containing catalyst at exceedingly high rates. However, under the same conditions, methylcyclopentane is virtually unreacted. The reason for this lies in the need for rearrangement of the methylcyclopentane molecule to a cyclohexane intermediate prior to the conversion to benzene. This rearrangement reaction requires a bond breakage and the formation of a new bond as shown in the following:


* Trademark

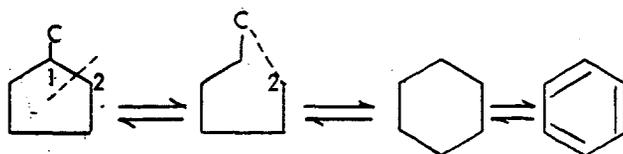

In detail, the carbonium ion mechanism which is involved in such a rearrangement calls for the formation of a tertiary carbonium ion with the subsequent shift to a primary carbonium ion and its addition at the second carbon atom, thus effecting the ring closure:

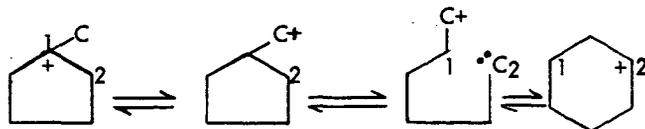

It will be observed that a cyclohexyl carbonium ion is produced. It is converted to cyclohexane in the reverse manner of the initial formation of the methylcyclopentane carbonium ion:

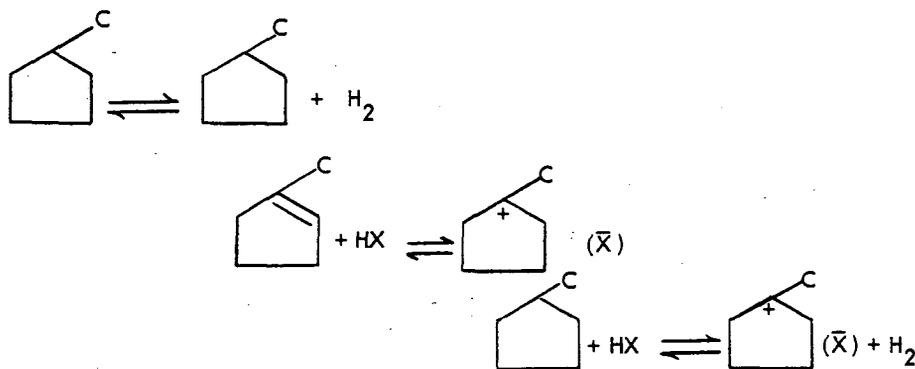

As pointed out above, in the absence of an acid catalyst no reaction of methylcyclopentane will take place, and a so-called bi-functional catalyst is required. This bi-functional property implies the balanced presence of both dehydrogenation-hydrogenation and acid activities. The proper balance is quite critical; otherwise, methylcyclopentane may be converted directly into hexane instead of cyclohexane.

We have found that a balanced catalyst is obtained by a specially prepared composite of aluminum, platinum and halogen, such as fluorine or chlorine. The conversion of methylcyclopentane is then readily carried out at about 450-500°C and about 20 atmospheres pressure in the presence of recycle hydrogen. The dehydrogenation under pressure in the presence of recycle hydrogen is now well-established in petroleum technology. Under these conditions, a clean catalyst surface is maintained so that long on-stream times are readily achieved.

It should be further pointed out at the conditions of operation the thermodynamic equilibrium among the three species, cyclohexane, methylcyclopentane and benzene, are such that the end product should contain a substantial amount of benzene, a very small amount of cyclohexane and an intermediate amount of methylcyclopentane. Therefore, it is imperative that there be a rapid conversion of the cyclohexane to benzene, so that methylcyclopentane may be converted into cyclohexane and the latter removed from the system in the form of benzene as rapidly as possible.

Unless this is done, methylcyclopentane cannot be converted into cyclohexane and will undergo undesirable side reactions such as the formation of hexanes.

The argument may be raised regarding the existence of the cyclohexane intermediate in the conversion of methylcyclopentane into benzene. In connection with this, we have carried out a study which provides a reasonable answer to the problem. This study involved the poisoning of the catalyst system by means of sulfur and observing the effect of the poison upon the conversion of cyclohexane and methylcyclopentane. The rate of cyclohexane conversion is normally much greater than that of methylcyclopentane. Therefore, if the cyclohexane rate is poisoned, the methylcyclopentane rate should not be affected until the cyclohexane rate is poisoned to the extent that it falls below the normal methylcyclopentane rate. This is essentially what has been found experimentally, as will be observed from Figure 2. Thus the indications are that at least the same intermediate is involved in the conversion of both cyclohexane and methylcyclopentane.

As might be expected, the conversion of C₇ and C₈ naphthenes into toluene and xylenes, respectively, also proceeds very readily over the bi-functional catalyst. It should be pointed out that, as the molecular weight is increased, the rate of the conversion of C₅ ring naphthenes rises rapidly. This is quite understandable on the basis of a considerably increased number of possible carbonium ions. The same is true for paraffinic hydrocarbons, so that higher aromatics are readily obtained from higher paraffins by the dehydrocyclization reaction.

It should be mentioned that under the usual operating conditions, the bi-functional catalyst will effect an equilibration among the isomers of the higher aromatics, so that the product will exhibit a composition closely approximating the thermodynamic equilibrium. However, it is possible to reduce the extent of equilibration by a proper selection of charging stock and operating conditions. Although ethylbenzene is not truly a coal chemical, it is an important intermediate for the production of styrene, and is normally prepared by the alkylation of benzene with ethylene.

With almost half of the benzene market going to styrene manufacture, refiners are taking a closer look at ethylbenzene separation from xylene by super-fractionation to compete with benzene alkylation as a styrene intermediate. Ethylbenzene from this source has a maximum potential of only 70 million gallons (505 million pounds) per year based on present xylene production and cannot replace benzene as a styrene feedstock but could take a share of the market. Economics of ethylbenzene separation depends greatly on the concentration of ethylbenzene in the mixed aromatics, which varies from crude to crude.

In one of our studies on ethylbenzene, we have investigated the possibility of producing ethylbenzene in high concentrations from straight-run fractions. Ethylbenzene is unique in one respect and that is that its direct precursor, ethylcyclohexane, is the highest boiling C₈ naphthene. Thus, by proper selection of the charging stock and operating conditions which do not cause excessive equilibration, it is possible to attain high ethylbenzene concentrations in the product.

The following procedure was employed. A so-called pre-xylene fraction in the Engler boiling range of 123 to 132°C was hydrogenated and subsequently distilled into 20 cuts. Each cut was processed over the bi-functional catalyst and the aromatic product distribution was determined. The following is the summary of the results:

Cut No.	BP, °C	Percent Distribution of the Aromatic Portion			
		p-Xylene	m-Xylene	o-Xylene	Ethylbenzene
1	116.8	24.9	58.3	16.8	0
5	122.0	21.6	55.9	20.3	2.2
10	126.5	13.2	34.7	33.1	19.0
14	131.1	2.5	4.1	13.5	79.9
15	132.6	2.6	0.3	14.0	83.1
16	133.9	1.1	1.9	7.6	89.9
17	134.9	1.6	2.0	8.5	87.9

-θ-

It will be observed that very high concentrations of ethylbenzene may be produced directly. Since ortho-xylene is the main impurity at the high concentrations of ethylbenzene, it can be readily separated to produce ethylbenzene fractions having a purity in excess of 95%. The above example serves to demonstrate the high versatility of a method involving variations in charging stock, catalyst and operating conditions.

The presence of a substantial number of hydrocarbons which may be converted into specific aromatic compounds has as one drawback the variable amounts of other charging stock components which remain in the aromatic product. Thus, the extremely rapid rise in the rate of production of lower aromatics would not be possible without the concurrent development of methods of separation of these aromatics from the other hydrocarbon components. These methods involve extraction by liquids and solids. One method which has received wide commercial acceptance is the Udex^(R) process,⁽²⁾ which employs a glycol-water mixture as a selective solvent. Originated by Dow Chemical Company and developed by Universal Oil Products Company, this process combines a high selectivity with a minimum utility requirement. Aromatics are recovered as a hydrocarbon type with a subsequent fractionation to produce pure benzene, toluene and mixed xylenes. It is interesting that the selectivity of separation is highest for benzene and decreases with increasing molecular weight.

C. Hydrocarbon Components Of Higher Boiling Fractions

Petroleum sources represent a virtually unlimited supply of polynuclear aromatics. The widely used catalytic cracking process produces, along with gasoline and gaseous hydrocarbons, a higher boiling fraction called cycle oil. This fraction is characterized by a high resistance to further catalytic cracking and contains a substantial amount of polynuclear aromatics. These aromatics are formed through a series of reactions involving removal of larger side chains, isomerization and dehydrogenation. The last reaction is in reality a hydrogen transfer reaction, wherein the hydrogen content of the lower boiling fraction is enriched at the expense of the higher boiling fraction. The usual composition pattern of the aromatic portion of cycle oil is extremely complex from the standpoint of the number of isomers; however, the actual composition by broad hydrocarbon class is much simpler in that the bulk of the material is represented by methylated polynuclear compounds. This is due to the fact that the less stable species are eliminated in catalytic cracking to give lower boiling compounds, leaving behind an equilibrated, highly stable structure. Typical components are mono- and dimethylnaphthalene followed by the methylated derivatives of tri- and tetra-ring condensed structures.

The removal of methyl groups followed by proper separation procedures represents a reasonable way of obtaining a variety of polynuclear compounds from petroleum sources. Such methods become particularly attractive when other sources cannot meet the demand. In the case of naphthalene, the coal-tar industry has dominated the market for many years, with an annual production of

500 million pounds. It should be remembered, however, that naphthalene, like ortho-xylene, is closely tied to the phthalic anhydride industry, with three-fourths of all naphthalene going to phthalic anhydride manufacture. Phthalic manufacturers have been hard-pressed at times to meet their phthalic demand because of a naphthalene shortage resulting from low steel production rates. In times of naphthalene shortage, ortho-xylene has been substituted in naphthalene-designed plants. This situation has also created a sizeable petroleum-naphthalene market. Thus, the hydro-dealkylation route is expected to become a major source of supply of this important chemical. Petroleum-naphthalene's high purity has provided an unexpected bonus in higher phthalic yields, making petroleum-naphthalene a much sought after chemical. Dependability of supply is another factor that has helped petroleum-naphthalene sales.

Despite ortho-xylene's invasion of the phthalic anhydride market, naphthalene consumption is expected to increase, reaching a figure of approximately one billion pounds by 1971, as illustrated in Figure 3. The naphthalene production and sales statistics are shown in Table 9.

Table 9 - CRUDE NAPHTHALENE STATISTICS
Millions of Pounds - (74 - 79°C)

Year	Production			Sales
	Coke-Oven	Tar Dist.	Total	
1950	99.7	188.8	288.5	206.7
1951	131.1	224.6	355.7	255.3
1952	106.9	215.6	322.5	209.8
1953	112.9	162.9	275.8	200.1
1954	100.1	195.1	295.2	224.2
1955	184.2	292.9	477.1	338.7
1956	177.3	314.2	491.5	289.0
1957	N.A.	N.A.	420.3	276.0
1958	N.A.	N.A.	345.1	212.6
1959	N.A.	N.A.	425.3	266.5
1960	N.A.	N.A.	517.0	310.3
1961	N.A.	N.A.	497.2	299.1

PRODUCTION AND SALES OF THE THREE GRADES AS OF 1960

	Millions of Pounds	
	Production	Sales
Solidifying at less than 74°C	24.7	26.0
Solidifying at 74°C to less than 76°C	21.5	10.2
Solidifying at 76°C to less than 79°C	470.9	274.1

-9-



As pointed out above, other coal hydrocarbons can be produced from petroleum when the demand arises. The newly developed methods of separation, ⁽³⁾ based on differences in carbon-to-hydrogen ratios, can be used to provide hydrocarbon classes which can subsequently be demethylated and further purified by conventional means, such as distillation and crystallization.

D. Tar Acids


The tar acids are represented by phenol, cresols, cresylic acids and xylenols. The production of phenol from petroleum sources has grown very rapidly and five different processes are currently used:

1. Chlorobenzene Hydrolysis
2. Benzene Sulfonation
3. Cumene Peroxidation
4. Raschig Method
5. Two-Step Oxidation

Of these, the first three supply the bulk of the market. The cumene peroxidation process has been gaining in popularity and most of the new plants will employ this procedure. The two-step oxidation method is of considerable interest in that the starting material is toluene, which is oxidized to benzoic acid followed by the copper catalyzed oxidation to form phenylbenzoate and subsequent hydrolysis to produce phenol and benzoic acid. The reactions are believed to take place in the following manner:⁽⁴⁾



Overall Reaction:



The reaction can also be applied to the production of various cresols starting with toluic acids, as well as 2-naphthol using 1- or 2-naphthoic acids as raw materials. Synthetic phenol capacity in the U. S. is presently about 940 million pounds per year. If all announced plans for expansion and new plants materialize, capacity will be over 1.2 billion pounds by the end of 1963. Table 10 presents historical production and sales data.

Table 10 - PHENOL PRODUCTION AND SALES, 1950-1961

Year	Millions of Pounds							Total	Sales
	Production								
	Synthetic			Natural					
Cumene	Other Processes	Total	Coal Tar	Petroleum	Total				
1950	-	291.9	291.9	-	-	20.2	312.1	199.8	
1951	-	364.6	364.6	-	-	23.8	388.4	244.0	
1952	-	316.2	316.2	-	-	21.6	337.8	187.6	
1953	-	356.8	356.8	-	-	25.6	382.4	199.5	
1954	19.2	377.5	396.7	-	-	20.8	417.5	218.6	
1955	69.7	405.3	475.0	37.9	3.8	41.7	516.7	280.3	
1956	93.8	415.6	509.4	34.5	5.3	39.8	549.2	302.6	
1957	100.7	413.8	514.5	33.8	8.0	41.8	556.3	289.5	
1958	98.8	365.0	463.8	36.8	5.8	42.6	506.4	281.1	
1959	137.7	514.0	652.0	32.2	7.8	40.0	692.0	414.3	
1960	173.2	557.5	730.7	30.5	11.5	42.0	772.7	423.7	
1961	188.6	542.7	731.3	35.2	12.5	47.7	779.0	334.1	

-θ-

The market for phenol is dependent to a considerable extent upon the fortunes of phenolic resin manufacture, as indicated in Table 11. These resins account for roughly 60% of the phenol consumption. About one-third of all phenol produced is used as a chemical intermediate in the manufacture of alkyl phenols, bisphenol-A, polycarbonate resins and caprolactam. Phenol, in

the chlorinated form, is used in the manufacture of herbicides, the most important of which are 2,4-D and 2,4,5-T acid derivatives. The balance of phenol goes to the petroleum industry for solvent refining and additives and some for specialty products.

Table 11 - PHENOL END-USE PATTERN AS OF 1960

	<u>Percent of Total</u>
Phenolic Resins	58
Bisphenol-A	7
Caprolactam	7
Adipic Acid	6
Petroleum Solvent Refining	5
Pesticides	4
Alkylphenols	4
Miscellaneous (Aspirin, Polycarbonate Resins, Chlorinated, etc.)	9
	<u>100</u>

-0-

The actual production of phenol from 1950 through 1961 and estimated production through 1971 are shown in Figure 3. In 1961, 779 million pounds of phenol were produced with a predicted production of one billion pounds by 1965 and 1.4 billion pounds by 1971. If the present 85% ratio of production to capacity is maintained, 1,650 million pounds of phenol capacity will be needed at the beginning of the next decade.

E. Tar Bases

At the present time, petroleum sources are not utilized commercially for the production of tar bases, such as pyridine, picolines, pyrrole, quinoline, etc. The most important reason for not using petroleum sources is the absence of a substantial market. If such a market should develop, petroleum sources will undoubtedly be used. These sources should be considered as providing a large volume, low cost reactive hydrocarbon which can be converted into the desired tar bases. There are indications that various pyridines and indoles have attracted the attention of the petrochemical industry.^(5,6)

F. Miscellaneous Coal Chemicals

A number of sulfur and oxygen compounds derived from coal have presented interesting synthesis problems for the petrochemical industry. For example, considerable work has been done on the synthesis of thiophene using butadiene, butene and butane with sulfur and sulfur dioxide.^(7,8) Again, in this case, the raw materials derived from petroleum are available and can be used when a suitable market potential is developed.

-0-


References:

1. Forziati, A. F., Willingham, C. B., Mair, B. J. and Rossini, F. D., *Petroleum Refiner*, 22, No. 11, 109 (1943).
2. Grote, H. W., *Chem. Engin. Progress*, 54, 8, 43 (1958).
3. Bloch, H. S. and Wackher, R. C., *Petroleum Refiner*, 34, No.2, p. 145 (1955).
4. Kaeding, W. W., *J. Org. Chem.*, 26, 3144 (1961).
5. Review Of Coal Tar Technology XI, Part 1, p. 102 (1959).
6. Anon., *Chemical Week*, p. 35, October 20, 1962.
7. Rasmussen, K. E., Hansford, R. C. and Sachanen, A. N., *Ind. Eng. Chem.*, 38, 376 (1946).
8. Canary, R. E., Devaney, L. W., Ruidisch, L. E., McCleary, R. F. and Kreuz, K. L., *Ind. Eng. Chem.*, 42, 467 (1950).


-9-

All statistical information has been gathered from the following:


U. S. Tariff Commission
Stanford Research Institute
Oil Paint and Drug Reporter
Chemical Week
Chemical & Engineering News
World Petroleum
The Oil and Gas Journal

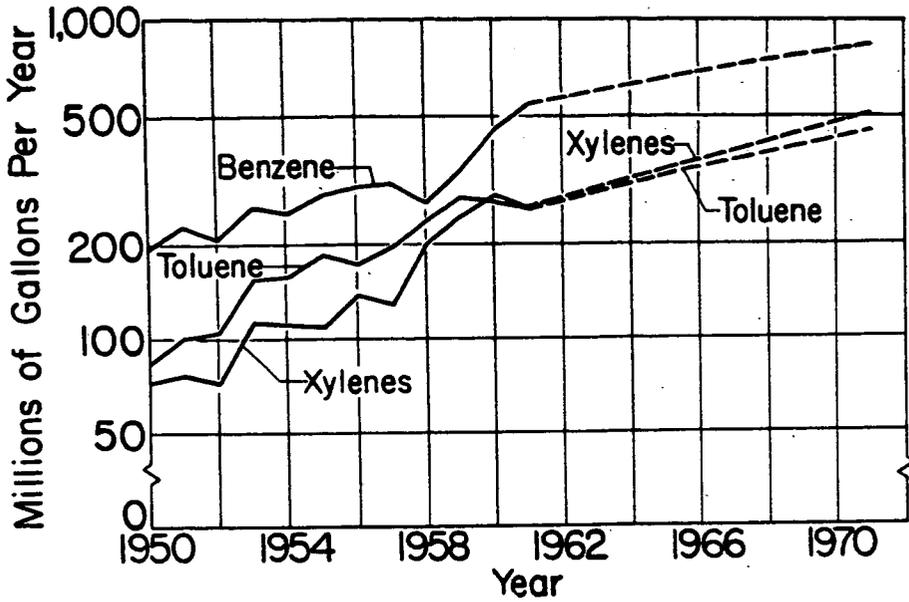

Benzene, Toluene and Xylenes Production
 1950-1961 Actual - 1962-1971 Estimated
 Figure 1

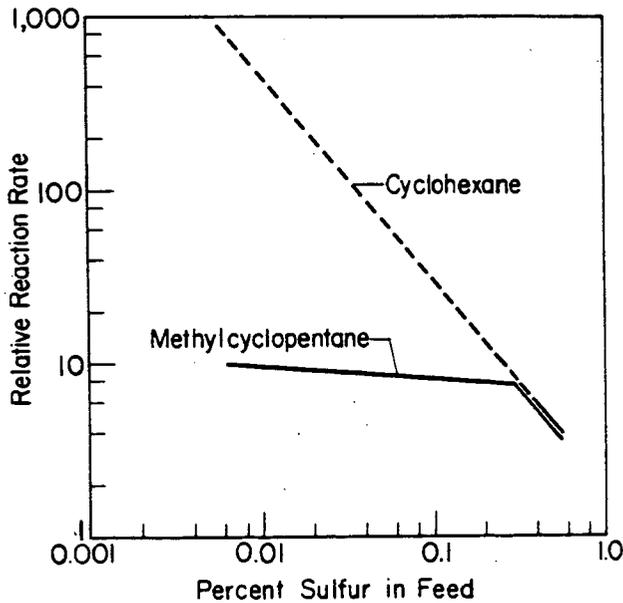

Effect of Sulfur on Conversion of Methylcyclopentane
 and Cyclohexane to Benzene
 Figure 2

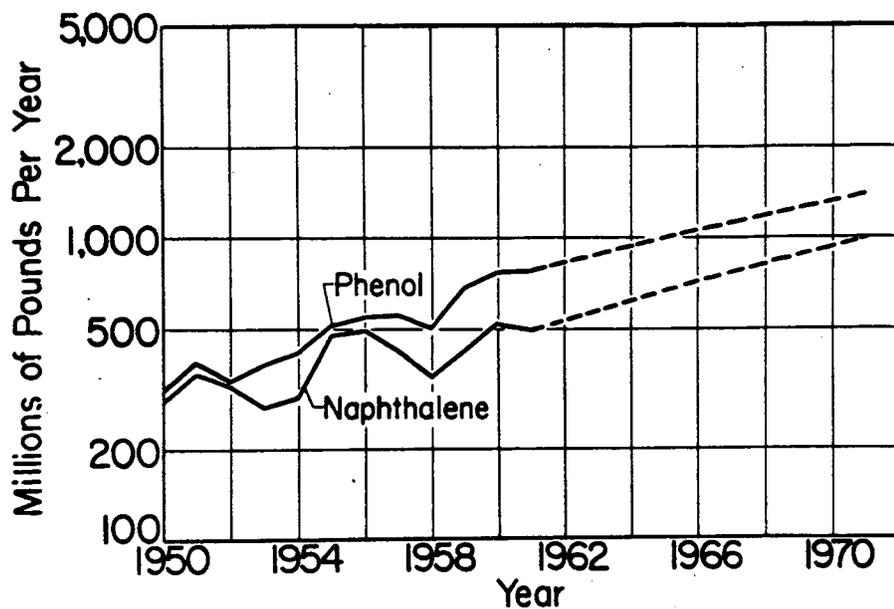

Naphthalene and Phenol Production
1950-1961 Actual - 1962-1971 Estimated
Figure 3

Chemicals from Coal Hydrogenation Products

M. D. Schlesinger

Pittsburgh Coal Research Center, Bureau of Mines, Pittsburgh, Pa.

INTRODUCTION

Coal has been the source of large quantities of useful chemicals and will continue to be for a long time to come. Because coal is a major resource of our country, the Federal Bureau of Mines is vitally concerned with its development and efficient utilization. Although millions of pounds of coal chemicals are marketed each year, people working with coal envision an even greater potential as new processes are developed. The discussion that follows will consider some of the methods that have occupied the minds of men for some time and some of the recent developments pioneered by the Bureau.

The coal hydrogenation process for making liquid fuels has been investigated in detail since its application as an industrial process almost 40 years ago. As time passed economic and technical changes have taken place that justify a reevaluation of existing knowledge. Under present quasi-peaceful world conditions where a copious supply of natural petroleum is available at low cost, hydrogenation of coal cannot be considered as a major source of liquid fuels.⁽⁵⁾ However, coal is an abundant raw material, and its application to other processes, exclusive of power and heat generation, presents a real challenge. Organizations in the United States and abroad have investigated the hydrogenation of coal and other coal utilization processes for many years. This work is still in progress in varying degrees, and in the following discussion are some of the gaseous, liquid, and solid chemicals that can be derived from the hydrogenation of coal. Associated with these technical developments are many design problems and an ever changing economic situation.

DISCUSSION

When considering the utilization of coal, it is natural to think in terms of thousands or even millions of tons a year. If the potential chemical products from coal are estimated, the quantities of chemicals must be evaluated in terms of present and potential markets. The tonnages of possible products are high and in some instances are greater than the current usage. Table 1 is a list of the more voluminous products that could be produced in a single 30,000-bbl/day coal hydrogenation plant that reacts about 12,000 tons of coal per day. These facts are fairly well known, and rather than recite comparative figures, consideration will be given to some of the more plentiful chemicals. It should be mentioned that there is considerable process flexibility to change the product distribution.

The potential yield of most chemicals from hydrogenation is several times greater than from carbonization since most of the carbon is converted to liquid and gaseous hydrocarbons. The list of potential chemicals from coal hydrogenation is extensive and generally can be categorized by the type of compounds shown in figure 1. Products of coal hydrogenation contain appreciable quantities of aliphatics, aromatics (single-ring and polycyclic), substituted aromatics, heterocyclic compounds, and hydroaromatics. Many of the products that can be produced in quantity have only limited markets, and their disposal could be a problem.⁽⁴⁾, ⁽⁷⁾

TABLE 1.- Chemicals from a Coal Hydrogenation Plant
(30,000 barrels per day from Illinois coal)

<u>Aromatics</u>	<u>Million pounds per year^{a/}</u>	
Benzene	224	(4,000) ^{b/}
Toluene	372	(1,875)
Xylene	425	(1,880)
Ethylbenzene	73	-
Naphthalene	104	(497)
Mixed aromatics	<u>175</u>	
Total	1,373	
 <u>Tar acids</u>		
Phenol	51.8	
o-Cresol	5.8	
m-, p-Cresol	63.3	
Xylenols	<u>44.8</u>	
Total	165.7	
Ammonium sulfate, tons/year ...	148,500	
Sulfuric acid, tons/year	29,400	

a/ 330 stream days.

b/ 1961 production from all sources in parentheses, million pounds per year.

It would be desirable to be able to produce and separate only compounds for which there is a ready market. In this way, salable products would not have to bear the burden of chemicals that have only fuel value.

At the present time the most useful products from coal are the low-molecular-weight members of each series; benzene, toluene, xylene, naphthalene, and phenol. These are the preferred elementary building blocks used to make well-defined products. Plastics, synthetic fibers, resins, detergents, and elastomers consume 7.3 billion pounds a year of benzene, toluene, and xylene, 520 million pounds of naphthalene, and 780 million pounds of phenol. The consumption of these five major raw materials that can be made from coal is still growing. So far, no one has been able to justify the investment in a coal hydrogenation system to produce the few marketable products. In fact, the direction in recent years has been to dealkylate substituted aromatics from petroleum, producing benzene and naphthalene for consumption in synthesis industries.⁽¹⁾ Here is a case where knowledge of the product composition and process know-how were applied to supply a need as the market developed beyond the capacity of the primary sources.

In 1952 Chemical and Engineering News⁽³⁾ described studies by Carbide and Carbon Co. and its "coal hydrogenation unit designed to manufacture aromatic chemicals." Carbide and Carbon did much work on the primary liquefaction products and found a large number of chemicals worth up to several dollars a pound. Some of the products visualized as finished products of intermediates were the light products B-T-X, naphthalene, and tar acids and heavier useful materials such as indan, fluorene, anthracene, phenanthrene, indanols, quinoline, carbazole, furans, and many others. These are indicated in the figure described previously. Markets have not developed for most of the high-molecular-weight products that could be separated. Instead, the demand continues to increase for lower-molecular-weight chemicals as monomers for designing complex molecules that have no structural counterpart in the hydrogenation products.

Condensed aromatic structures such as pyrene and coronene, which may be considered as useful products, are resistant to mild hydrogenation conditions. They are recovered in the heavy oil product from hydrogenation of coal and can be isolated in a crystalline form. The greatest amount of condensed aromatics are recovered in "kiloil" produced by roasting the plant residue. Actually, condensed aromatics are formed in the kiln through cracking and dehydrogenation during carbonization. Other components of the recovered oil are methylpyrenes, carbazole, and some 1,12 benzperylene.

Pyrene, which may be in 10 to 12 percent concentration in the kiln oil, can be concentrated further by distillation and isolating the mid-40-percent fraction. Carbazole is concentrated in the low-boiling fraction, and the vacuum residue contains the coronene concentrate. The pyrene fraction is distilled into narrow fractions separated from the oil and mixed with a solvent such as benzene-alcohol that dissolves only oil. When the solvent is centrifuged or filtered off, pure pyrene remains.

Carbazole is very resistant to hydrogenation, and most other aromatics in the low boiling fraction of the kiln oil can be hydrogenated to lighter distillable oils. The remaining carbazole is insoluble and can be separated by filtration and distillation.

Coronene can be isolated from the kiln oil residuum after vacuum distillation to remove pyrene. The fraction boiling at 350° to 400° C is slurried with benzene and filtered. Coronene is insoluble and is recovered in pure form. Contaminating hydrocarbons can be hydrogenated to lower boiling liquids by catalytic refining. Coronene is not hydrogenated and is recovered as a precipitate. Further purification can be done by vacuum distillation or recrystallization from o-dichlorobenzene.

Small-scale studies on the hydrogenation of coal have been limited in the past by the relatively long time, 3 to 4 hours, required to heat and cool in autoclave. The influence of temperatures, especially above 350° C, on the experimental results has always raised questions concerning the validity of the data. The reaction system shown in figure 3 was developed with two main objectives, rapid heating and cooling and small charge size. Passing a low voltage and high current (about 700 amps at 15 v) through the type 304 stainless steel reactor raises the temperature to 800° C in about 2 minutes. Pressures as high as 6,000 psig could be maintained for over an hour before metal fatigue occurred. When an experiment is completed, the reactor is cooled in about 10 seconds by a water jet. Details of this apparatus have been published.⁽⁹⁾ Experiments on the hydrogenation of coal could then be made at more severe conditions for the production of methane and light hydrocarbons, and from these studies a new synthesis of polycyclic aromatics was found.

If dry coal is hydrogenated at 6,000 psig and 800° C for zero and 15 minutes and a hydrogen rate of 100 scfh (0.5 fps), the results shown in figures 4 to 6 are obtained.⁽⁸⁾ In general, the conversion of all coals is most rapid within the first 3 minutes and thereafter proceeds at a steady, slower rate. The yield of gas is similar but there is no change in the yield of liquids which are produced in the early stage of the reaction and swept out of the apparatus. This reaction is substantiated by the comparative experiments shown in figure 7, where two sets of experimental data made at two gas velocities are shown. At the lower gas rate of 20 scfh the hydrocarbon vapors have more time to be hydrocracked to additional hydrocarbon gases.

The concentration of methane in the C₁ to C₃ fraction of the gas calculated from the spectrometer analyses increased with coal rank as shown in table 2. Although the gas formed from low-rank coals contained less methane, there were more higher hydrocarbons present which gave a higher heating value. This trend extends to the oils produced; that is, the low-rank coals produced more liquid product as shown in figure 6. Anthracite and char produced no liquid products.

TABLE 2.- Distribution of light hydrocarbons in the gas

	Composition, vol pct		
	Methane	Ethane	Propane
Lignite	82	15	3
High volatile C	88	10	2
High volatile A	90	9	1
Anthracite	92	7	1
High volatile C char ..	92	8	0

An analysis of the liquid product from a Wyoming coal (hvcb) is shown in table 3. The mass spectrum indicates a complex mixture of products containing aromatics and tar acids. Analyses of the liquids from lignite and Pittsburgh seam coal (hvab) were almost identical to the results shown for the hvcb Wyoming coal.

TABLE 3.- Mass spectra of oils from hydrogenation of a Wyoming coal (hvcb)
(6,000 psig, 800° C)

Possible compound types including alkyl derivatives	Volume-percent of total oil
Benzene, toluene, etc.	23.1
Phenols	21.5
Naphthalenes	18.7
Indanols	11.0
Phenanthrenes, anthracenes ..	3.3
Balance	22.4

The next subject describes some work that falls in the category of unexpected findings. When anthracite coal was hydrogenated for making high-Btu gas, the cold trap contained a yellow powder identified by ultraviolet analysis as a high concentration of coronene.

The experimental data shown in table 4 indicate the limits for temperature and pressure - 6,000 to 8,000 psig and 700° to 800° C. The maximum yield of coronene was 0.8 wt pct of the low-volatile (4.2 percent volatile matter) anthracite. The product was a low-density, porous yellow-orange solid that was about 70 percent coronene by ultraviolet analysis. Some samples contained over 80 percent coronene. The balance is mostly 1,12-benzperylene and pyrene. Most of the coronene was recovered in the cold trap, but some was obtained from the connecting lines and reactor by washing with warm benzene. Coronene in the wash is included in the yield.

TABLE 4.- Coronene from hydrogenation of anthracite

Temperature, °C	30 minutes at -		Coronene, weight-percent	
	Pressure, psig		In solid product	Of maf coal
600	6,000		0	0.01
700	6,000		71	0.5-0.8
800	6,000		37	0.3
600	8,000		0	0
700	8,000		49	0.5-0.7
800 ^{1/}	8,000		38-54	0.4-0.5
700	3,000		50(est)	0.08

^{1/} 15 minutes.

Coronene could also be produced from Pittsburgh seam coal (hvab), but from the few experiments made it appeared that the higher temperature of 800° C at 6,000 psig was required to yield the same amount of coronene - about 0.5 wt pct of the maf coal. However, no dry solids were recovered in the cold trap, and the yields are based on an analysis of the benzene washings. Equal quantities of coronene and pyrene were found when a hvab coal was used.

Other materials such as asphaltenes and centrifuge residue from the hydrogenation of coal were also examined. The yields of coronene were lower and 4 to 10 times more pyrene were present. Thus, no other coal or coal hydrogenation product was as good as anthracite for this synthesis. Since the yield of coronene from coal is only 0.5 to 0.8 percent, a use must be found for the resulting hydrocarbon gases and char. It has been estimated that if the gas and char are sold for fuel value, the coronene could be sold for less than \$1 a pound.

Another product that can be considered is the mixture of closely related chemicals that may be used as fuel for supersonic aircraft. The distillable oil from the hydrogenation of coal contains bicyclic aromatics that could be hydrogenated to naphthenes that are thermally stable and have many desirable properties. An oil produced in the pilot plant of the Bureau of Mines was distilled to 325° C end point oil for feed stock. This oil was then desulfurized and partially hydrogenated over cobalt-molybdate catalyst at 2,500 psig, 400° C, 50 scf H₂ per pound of oil, and at a space velocity of 3 vol oil/hr/vol catalyst. A 180° to 280° C fraction of the desulfurized oil was saturated over a nickel catalyst to produce a naphthenic product.

A similar fuel for supersonic jet aircraft has been produced from a distillable fraction of tar made by low-temperature carbonization. Results of this work have been published in a Report of Investigations.⁽¹⁰⁾ In figure 8 the narrow distribution of products indicated by mass spectrometer analysis is shown. Practically all of the oil is in the C₁₀ to C₁₅ range with a maximum at C₁₂ or C₁₃. This fuel met all but one of the specifications established tentatively for this type of fuel. For some as yet unexplained reason, this oil was not stable in the high-temperature test unit. However, recent laboratory tests indicate that the oil is more stable after rehydrogenation.

A plasma jet unit is now being used for experiments with coal at very high temperatures. If the temperature of the coal approaches the plasma temperature, extremely severe hydrogenation conditions can be established.

At the present time only limited results are available. When coal is heated in an argon plasma, the products are a very fine residue, carbon monoxide, methane, acetylene, hydrogen, and nitrogen. The composition shown in table 5 was obtained with slow cooling of the products. Quenching with gas or liquids will give other products. Also, the products will vary with other operating variables such as the working gas composition, gas and coal rates, and power input.

Other forms of energy such as microwaves, corona discharge, and maser and laser beams have also been considered as an active environment for coal hydrogenation experiments. However, manpower and financial limitations are keeping these in the paper stage at the present time.

Several important factors are becoming evident as work on hydrogenation of coal continues. The system is being modified to yield fewer products. Instead of a wide range of liquid fuels we have been making hydrocarbon gases and light aromatics, relatively pure polycyclic products, and relatively narrow fractions. Hydrogenation yields more of these desired products than a carbonization or coking process. Thus, hydrogenation provides us with a potential for providing large quantities of useful products when a profitable demand develops. Many people envision a coal hydrogenation product "tree" as extensive as the popular "tree" published for coal tar. The Bureau of Mines will continue to do its part in providing an atmosphere in which the hydro-

generation tree will come to fruition.

TABLE 5.- Gas composition from coal in a plasma jet
(5 kw net power input, hvab coal 70 x 100 mesh)

Argon	84.5	-
Hydrogen	9.3	60
Nitrogen	0.9	6
CH ₄	0.3	2
C ₂ H ₂	2.3	15
CO	2.7	17
CO ₂	tr	-

Coal conversion - 15 percent

Residue (<325 mesh) - 6 percent of coal feed

LITERATURE CITED

- (1) Asselin, G. F., and R. A. Erickson. Dealkylation Put Petroleum Into the Benzene-Napthalene Business. Oil and Gas J., Mar. 19, 1962, pp. 127-129.
- (2) Boente, L. Coronene. Technical Oil Mission, Reel 201, Frames 654-656.
- (3) Carbide Takes the Hex Out of Coal. Chem. and Eng. News, v. 30, May 12, 1952, pp. 1954-1959.
- (4) Coal Chemicals Glut Coming. Chem. and Eng. News, v. 34, Feb. 20, 1956, pp. 792-796.
- (5) Cockram, C., and E. W. Sawyer. Hydrogenation at Billingham in Retrospect. Ind. Chemist (London), May 1959, pp. 221-229.
- (6) Donath, E. E. Fuels and Chemicals From Coal Hydrogenation. Ind. and Eng. Chem., v. 46, Oct. 1954, pp. 2032-2035.
- (7) Facts and Figures for the Chemical Process Industries. Chem. and Eng. News, v. 40, Sept. 3, 1962, 84 pp.
- (8) Hiteshue, R. W., R. B. Anderson, and S. Friedman. Gaseous Hydrocarbons by Hydrogenation of Coals and Chars. Ind. and Eng. Chem., v. 52, July 1960, pp. 577-579.
- (9) Hiteshue, R. W., R. B. Anderson, and M. D. Schlesinger. Hydrogenating Coal at 800° C. Ind. and Eng. Chem., v. 49, Dec. 1957, pp. 2008-2010.
- (10) Schlesinger, M. D., and R. W. Hiteshue. Synthetic Fuel From Coal for Supersonic Aircraft. Bureau of Mines Report of Investigations 5902, 1961, 19 pp.
- (11) Woodcock, W. A., and A. H. Tenney. Production of Aromatics by Coal Hydrogenation. Preprint - Am. Chem. Soc. Joint Symposium on Future of Aromatic Hydrocarbons, Apr. 4-7, 1955, pp. 39-42.

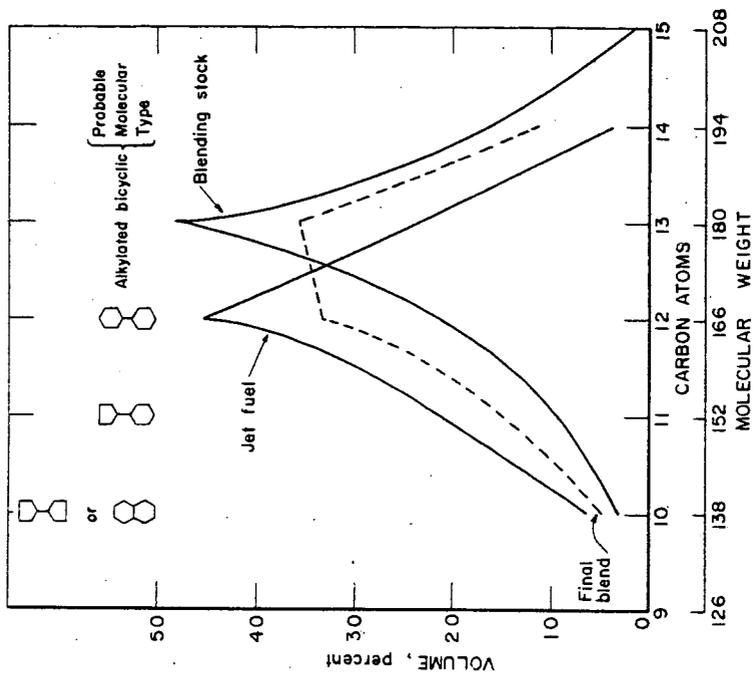
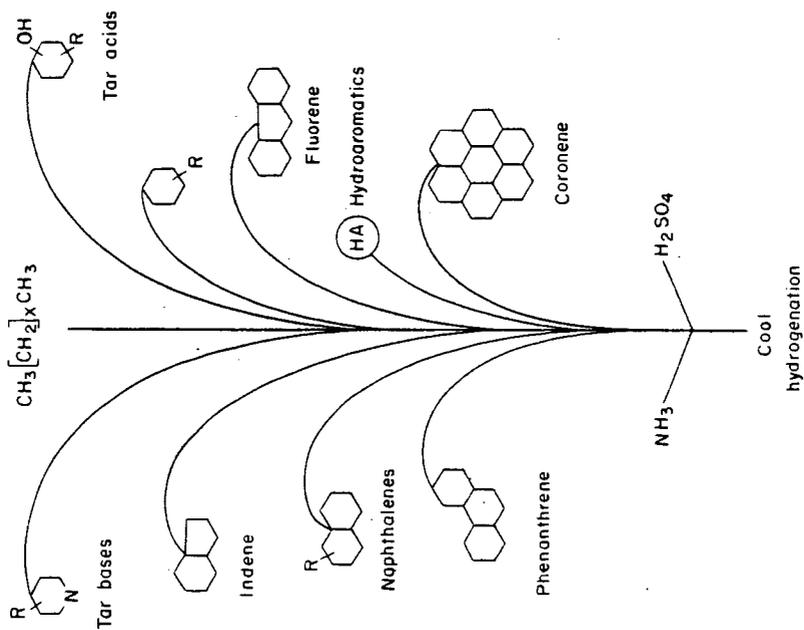


Figure 8.- Molecular weight distribution in jet fuels.

Figure 1.- Typical chemicals from hydrogenation of coal.

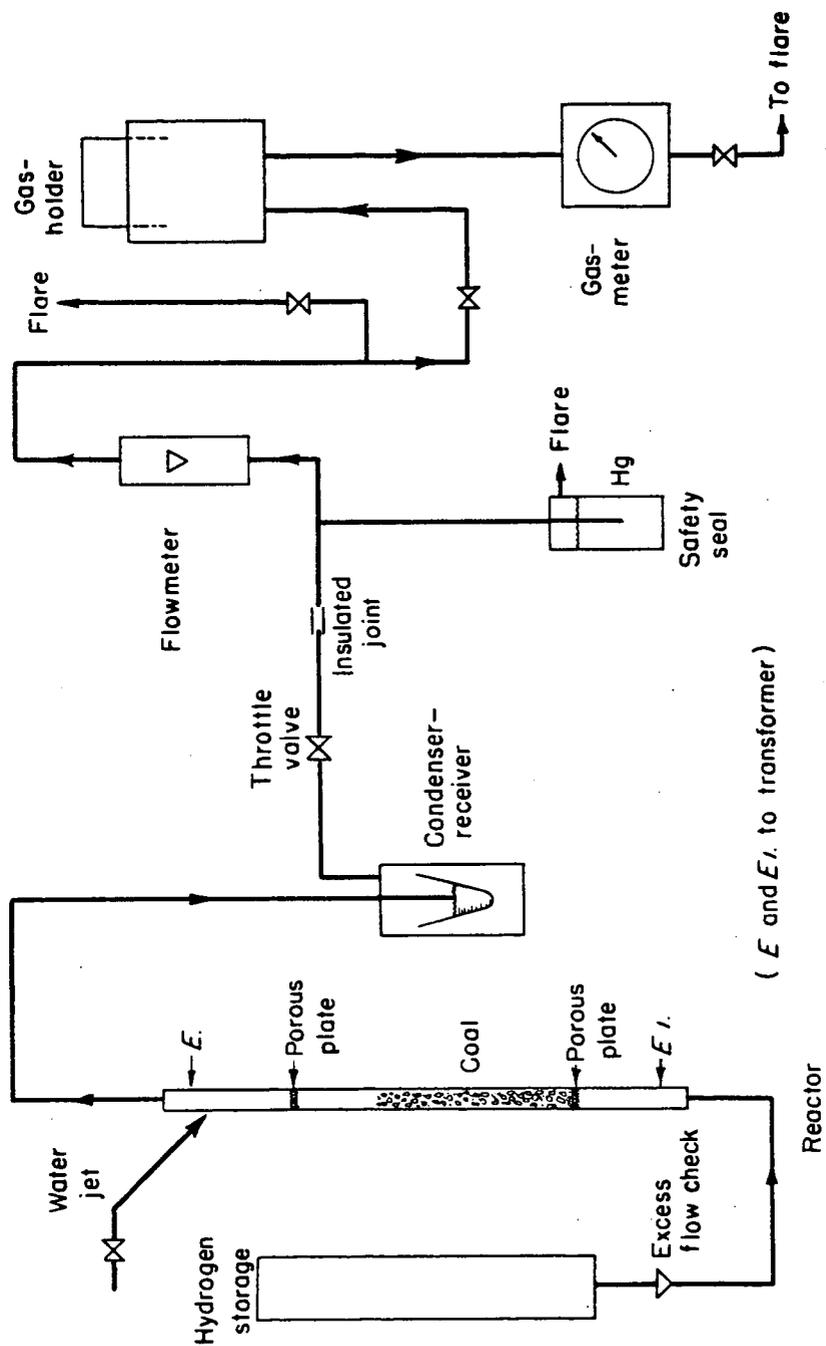


Figure 3.—Simplified flow sheet of apparatus.

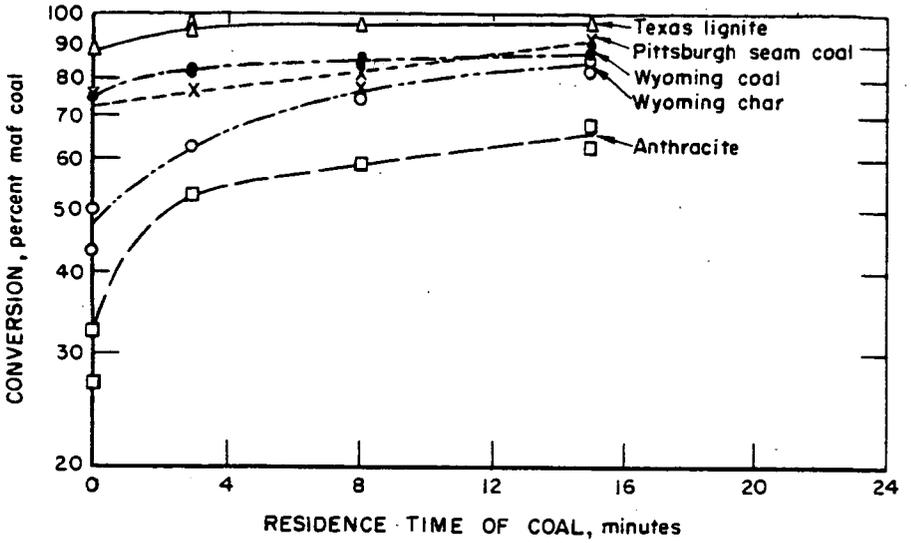


Figure 4.- Effect of residence time on conversion.

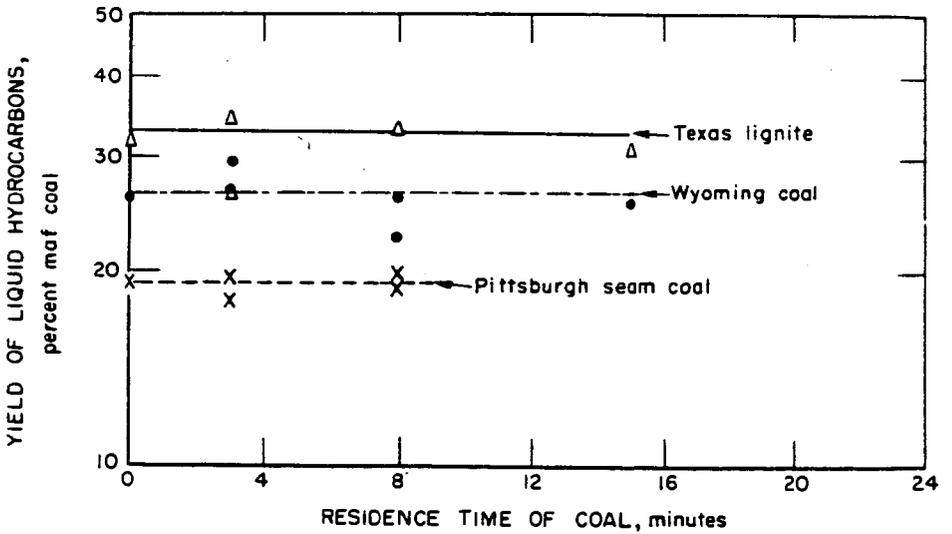


Figure 6.- Effect of residence time on yield of liquid hydrocarbons.

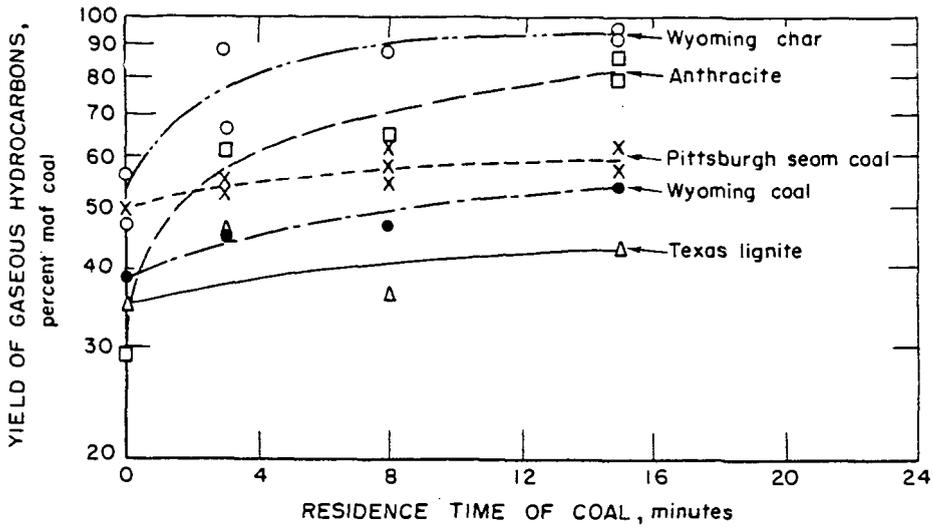


Figure 5.-Effect of residence time on yield of gaseous hydrocarbons.

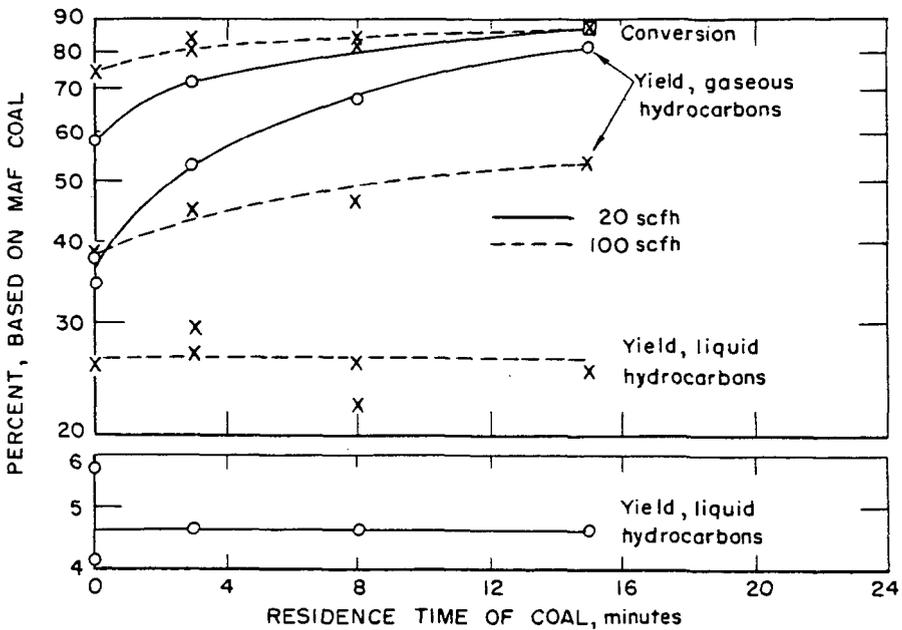


Figure 7.- Effect of residence time on product distribution for Wyoming coal at two gas rates.

COAL CHEMICALS FROM COAL OXIDATION PRODUCTS

R. S. Montgomery

The Dow Chemical Company
Midland, Michigan

Coal can be oxidized in various ways to yield mixtures of organic acids. The product obtained, of course, depends to some extent on the specific process. The process that The Dow Chemical Company has felt to be the most promising involves the oxidation of a suspension of bituminous coal in aqueous sodium hydroxide by means of gaseous oxygen under high pressure. This process requires about three pounds of sodium hydroxide for every pound of coal oxidized. The Dow Chemical Company as you know is a large producer of chlorine and sodium hydroxide. Since we have large internal requirements for chlorine without the equivalent requirements for the sodium hydroxide produced as a co-product, this process would seem ideal for us. The process that we used is basically the process developed by The Coal Research Laboratory of The Carnegie Institute of Technology.¹ We did, however, refine this process somewhat by using a more sophisticated, multiple-chamber, stirred reactor so that the process could be carried out continuously. The Coal Research Laboratory had used a simple stirred autoclave, but of course recognized that this reactor would probably be modified to allow continuous operation in an actual commercial process.

The oxidation products obtained by this process are sodium carbonate, a relatively small amount of the base-soluble, water-insoluble, humic acids, and the most important product, a light-yellow colored, water-soluble mixture of aromatic acids. The average molecular and equivalent weights of these so-called "coal acids" are about 270 and 82 respectively, resulting in an average carboxylic acid functionality of 3.3. The main components of this mixture are the various benzene, naphthalene, and biphenyl polycarboxylic acids; 1,2,4 benzenetricarboxylic acid, which constitutes about 21% of the mixture, is the most important single component.^{2,3,4,5} The separation or even fractionation of this mixture is difficult and expensive⁶ and so any commercial use for it will probably, at least initially, be a use for the mixture as a whole without any extensive separation.




There are many potential uses for the coal acids, and some of them appear to have a great deal of promise. This product is quite unique in that these acids are almost completely aromatic but have sufficient polyfunctionality so that they are readily soluble in water, and instead of crystallizing, form an amorphous film on the removal of the water. This great difference between the coal acids and currently available aromatic acids is both a strength and a weakness. It is a strength because there is the possibility that very large amounts could be required for applications where virtually no substitutes could be found. It is a weakness in that there is no ready-made market for a material of this kind, and it is difficult to assess accurately the volume that could be sold and the value that it would have to the consumer.

The acids themselves and their salts have been suggested as substitutes for other water-soluble acids in various applications,¹ and in addition

have been used as corrosion inhibitors⁷ and as a set retarder for gypsum⁸. One application for these acids that is certainly not obvious is their use as a warp size for synthetic fibers. The coal acids were found to be an excellent warp size for nylon, polyester fibers, and cellulose.^{9,10,11} The reason for this is that these polyfunctional acids interact more and more strongly by hydrogen bonding as their aqueous solution becomes more and more concentrated until finally they form, to all intents and purposes, a "high polymer" at very low water contents. These crosslinking hydrogen bonds are cleaved by water and so this "high polymer" is still perfectly soluble in water. Although the coal acids make an excellent warp size, they do have a very real disadvantage. Textile mills are naturally reluctant to use a colored size on an expensive fiber even if they are assured that it can be entirely removed after weaving.

Perhaps the most obvious derivatives of an organic acid to be investigated are the esters, and it was found that the various esters of the coal acids could be used as plasticizers,¹ synthetic lubricants,¹² hydraulic fluids,¹³ and corrosion inhibitors.¹⁴ Here again their color mitigated against their use in plasticizers and they did not possess any property, including potential price, that would make them extremely interesting for these applications. If they were available there would doubtless be some sold for these purposes, but a production plant would not be constructed on the strength of these applications.

The most promising application for the coal acids is their use in thermosetting resins. They can be reacted with an alkanolamine,¹⁵ alkylene oxide, polyhydroxyl compound¹⁶, or polyamine¹⁷ to give a wide spectrum of resins with varying properties. The polyamide, polyester, or combination of functional groups possible in these resins are illustrated in the following examples:



It is advantageous to prepare a partially cured but still water-soluble resin. Heating equivalent amounts of the coal acids and monoethanolamine at 170°C. for 3 hours gave 85% esterification, but very little amide formation. Other partially cured but water-soluble resins can be prepared by heating the coal acids with pentaerythritol, or ethylene, propylene, or butylene oxides. These partially cured resins are in the form of viscous aqueous solutions. They can be stored indefinitely in this form without any danger of further polymerization. This partially cured material will completely cure to a strong, insoluble, crosslinked structure when it is heated at elevated temperatures (over 200°C). In addition, these partially cured coal acid resins are compatible with the water-soluble phenol-formaldehyde prepolymers, and are incorporated in the phenol-formaldehyde polymer structure. The physical properties of the cured coal acid resins compare favorably

with those of other thermosetting resins, and in addition at a suitably large volume their cost should be less than the other thermosets.

These coal acid resins could be used for many purposes such as plywood, hardboard, and chipboard binders¹⁸, binders for fiberglass, and shell molding and foundry core resins¹⁹. There has been a great deal of work done especially in the field of foundry resins, and these resins have shown considerable utility. The extremely long pot life is a definite advantage for many uses, but the attendant relatively high curing temperature is a disadvantage when the resin is used to bind thermally sensitive materials. In any case the coal acid resins are very promising and appear to represent the best possibility for a large-scale use for the coal acids.

The final portion of my talk will be concerned with the question of the economics of producing a product such as this and why The Dow Chemical Company has not begun commercial production. Basically, the coal acids are a low-priced product. If they are to be commercially successful they must compete pricewise with the products which will do a similar job in a particular application, and in general these are high-volume, relatively low-priced chemicals. In addition to being a low-priced product, the coal acids also require a large capital expenditure for production facilities. For a product of this kind requiring a large capital expenditure, there is a characteristic volume-cost curve. At high production rates the cost is low, but where a high production rate is not justified, the product is very expensive to produce. Therefore a company embarking on the commercial production of a product such as this must take a calculated risk and construct a large production plant and price the product low in the hope of developing a large market for it which will justify this large plant and low price. If the market does not develop as hoped, a great deal of money could be lost. Therefore, what is needed to stimulate interest in the commercial production of coal chemicals from coal oxidation products is a single large-scale use which seems certain enough to justify the construction of a large production plant. At the present time the coal acid resins appear to represent the best possibility of obtaining this large-scale use.

Literature Cited:

- (1) Franke, N. W.; Kiebler, M. W.; Ruof, C. H.; Sovich, T. R.; Howard, H. C.; *Ind. Eng. Chem.* 44, 2784 (1952)
- (2) Holly, E. D., and Montgomery, R. S., *Fuel* 35, 49 (1956)
- (3) Holly, E. D., Montgomery, R. S., and Gohlke, R. S., *ibid* 35, 56 (1956)
- (4) Montgomery, R. S., Holly, E. D., and Gohlke, R. S., *ibid* 35, 60 (1956)
- (5) Montgomery, R. S. and Holly, E. D., *ibid* 36, 63 (1957)
- (6) Montgomery, R. S. and Sienknecht, P. J., *Ind. Eng. Chem.* 47, 1274 (1955)
- (7) Montgomery, R. S., U.S. 2,878,191 (1959)

- (8) Montgomery, R. S. and Tobey, H. M., U.S. 3,054,687 (1962)
- (9) Rickert, H. B.; Bozer, K. B.; Montgomery, R. S.; and Duke, M. W.
U.S. 2,826,515 (1958)
- (10) Bozer, K. B.; Montgomery, R. S.; and Archer, W. L.;
U.S. 2,875,099 (1959)
- (11) Bozer, K. B.; Montgomery, R. S.; and Archer, W. L.;
U.S. 2,875,100 (1959)
- (12) Montgomery, C. W.; Gilbert, W. I.; and Kline, R. E.;
U.S. 2,516,640 (1950)
- (13) Montgomery, C. W.; Gilbert, W. I.; and Kline, R. E.;
U.S. 2,512,255 (1950)
- (14) Montgomery, R. S., U.S. 2,878,296 (1959)
- (15) Archer, W. L. and Montgomery, R. S., U.S. 2,895,934 (1959)
- (16) Archer, W. L.; Bozer, K. B.; and Rickert, H. B.; U.S. 2,895,935
(1959)
- (17) Archer, W. L.; Montgomery, R. S.; and Lang, J. L.; U.S. 2,895,936
(1959)
- (18) Louch, J. B. and Archer, W. L., U.S. 3,005,743 (1961)
- (19) Archer, W. L.; Montgomery, R. S.; Bozer, K. B.; and Louch, J. B.;
Ind. Eng. Chem., 52, 849 (1960)

INDENOLS IN COAL TARS. THE FIRST PREPARATION OF INDENOL.

Sidney Friedman, Marvin L. Kaufman, Bernard D. Blaustein,
R. E. Dean, and Irving Wender

U. S. Bureau of Mines, 4800 Forbes Avenue,
Pittsburgh 13, Pennsylvania
R. E. Dean, Coal Tar Research Association,
Oxford Road, Gomersal, Near Leeds, England

Indenes have long been known to be major constituents of coal tar, but only recently evidence for the presence of indenols has come from examination of several coal tars by low ionizing voltage mass spectrometry.^{1/} This evidence is based on the appearance of a series of peaks at mass units corresponding to the molecular weights of indenol and its homologues in coal tar phenolic fractions. This series of peaks parallels the corresponding indanol series of mass unit peaks. These ubiquitous but elusive compounds may be responsible for much of the gum formation in coal tar, particularly in the tar acid fraction.

The parent hydrocarbon, indene, has been a chemical of commerce for several years, and recently a series of indene derivatives has been made available for development purposes. The commercial importance of these compounds stems from their high chemical reactivity. In the case of indenols, which appear to be major components of certain coal tars, the presence of a phenolic group as well as an olefinic bond in conjugation with an aromatic ring would be expected to provide even greater opportunity for reaction.

While indene and several of its derivatives are thus readily available, indenols have escaped both synthesis and isolation. Two derivatives of indenol, an indenol-O-acetic acid^{2/} and a methoxyindene^{3/} have been reported in the literature, but no reference exists for any preparation of the parent phenol. It should be pointed out that 1-indenol is known, but this compound is not phenolic.

In order to study the properties of the indenols, and even to prove their presence in coal tar, it appeared necessary to first isolate or synthesize at least one member of the series. The synthetic approach proved to be more rewarding.

We have now developed a successful procedure for preparing both 4- and 5-indenol by catalytic dehydrogenation of the respective indanols which are available from coal tar. Initially, a procedure developed by Webb and Corson^{4/} for the dehydrogenation of substituted ethylbenzenes to the corresponding styrenes was adapted. The method involves passing steam and indanol over a chromia-alumina catalyst at 570° C. The procedure was not always reproducible, and analysis of the product by mass spectrometer and gas chromatograph showed that unchanged indanol was usually the major constituent.

Subsequently, this procedure was modified, resulting in higher and more reproducible yields. In addition, several techniques have been developed for purifying the product. In the dehydrogenation itself, nitrogen has been substituted for steam as a carrier gas. The pyrolysis temperature has been increased to 650° C. In this way, we have succeeded in preparing sizeable quantities of indenols in good yields from both 4- and 5-indanol. The same procedure has been used to dehydrogenate indanol trimethylsilyl ethers to the corresponding indenol trimethylsilyl

ethers. This latter method is more convenient, since the trimethylsilyl ethers are liquids and thus more readily fed to the pyrolysis column. In addition, the ethers give somewhat better conversions to the dehydrogenation product and appear to be more stable during storage. Gas chromatography of the indenols as their trimethylsilyl ethers has certain advantages. In general, the ethers can be chromatographed at lower column temperatures than the parent indenols. The non-polar nature of the ethers is an additional advantage, allowing a wider choice of column packing and giving better separation and less tailing of peaks.


Both the indanol and indenol trimethylsilyl ethers are readily prepared by refluxing the phenols with hexamethyldisilazane,^{5/} and the indenols are easily regenerated from the ethers by refluxing with ethanol.

The initial isolations of pure indenols required repeated recrystallizations from petroleum ether to obtain pure, indanol-free samples. Purity was readily determined by gas chromatographic analysis, and checked by low ionizing voltage mass spectrometry which gives a measure of the ratio of mass 132 (indenol) to 134 (indanol).



Subsequently, several chromatographic procedures were developed which allowed cleaner separation of indenol from indanol. The first chromatographic separation was carried out using a glass column packed with Chromosorb on which was adsorbed aqueous AgNO_3 solution.^{6,7/} Crude indanol-indenol pyrolyzate mixtures were dissolved in heptane and put on the column. Elution with more heptane removed only indanol. The indenol was eluted with methyl isobutyl ketone.

The second, more efficient chromatographic separation was a similar procedure, called "ligand exchange."^{8/} This procedure combines ion exchange and coordination chemistry to accomplish a task that neither could do alone. An ion exchange is prepared from an ion exchanger resin and a suitable metal ion (in this case Ag^+) which can complex with the appropriate ligand (in this case an olefin). In the procedure used, a Dowex cation exchanger resin was washed with an aqueous solution of silver nitrate and then air-dried. The silver impregnated resin was packed into a chromatographic column and an indanol-indenol mixture in acetone poured onto the column. Elution with petroleum ether removed the indanol. The indenol was eluted with chloroform. When the column was deliberately overloaded with indenol, the excess came off with the indanol, resulting in pure (99+ percent) indenol in the chloroform eluate. This proved to be the best way to obtain analytically pure indenol samples.

The initial gas chromatographic analysis of the indenols was used to determine ratios of indanol to indenol in pyrolyzate products and later in purified material. It was evident at an early stage of this problem that dehydrogenation of an indanol did not produce a single product, since the indenol peak on a gas chromatogram was readily resolved in each case into two peaks. The dehydrogenation product from 4-indanol was separated on a column to give two different peaks, which have the same mass and almost identical ultraviolet spectra. It is believed that these two compounds are the isomers, 4- and 7-indenol, both of which can be formed by dehydrogenation of 4-indanol.

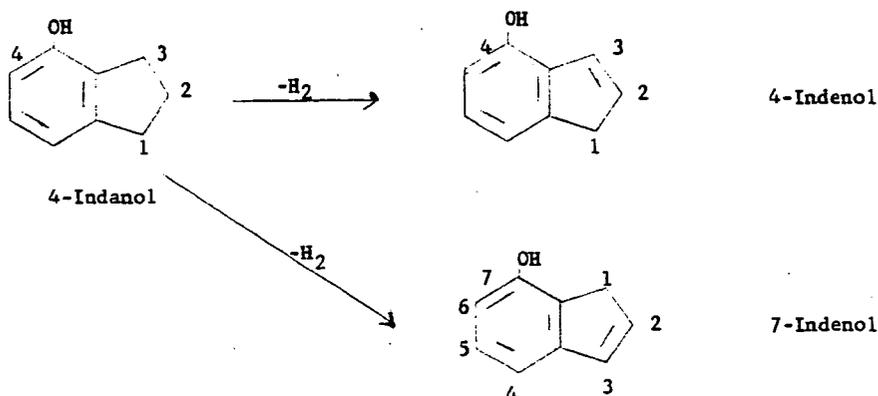

The ease with which these two compounds isomerize is not known. However, the individual isomers appear to be stable with respect to each other, since freezing out a given isomer and re-injection in the column fails to show any evidence of isomerization of the given material. This isomeric pair phenomenon also has been found in the product of dehydrogenation of 5-indanol. The 5- and 6-indenol so produced are less readily separated by gas chromatography (Figure 1).



Ingold,^{3/} in his investigation of the 5-(6-) methoxyindenes, came to the conclusion that the material behaved as though it were a mixture of the two isomers. Wheland^{9/} has referred to the compounds as tautomers. However, this is based on observations of experiments which could have given rise to isomerization. Whether true tautomerism exists has yet to be demonstrated. In fact, the gas chromatographic behavior reported here implies a stability great enough to deny the title of tautomers to these pairs of isomers.

Various spectral techniques have been applied to this problem to verify the structure of the indenols. The nuclear magnetic resonance spectra of both indenol samples is consistent with the proposed formulas in that there are two olefinic hydrogens having the same chemical shift as those in indene.^{10/} Ultraviolet spectra of the indenols and their trimethylsilyl ethers bear the same relationship to the spectrum of indene as do those of the indanols and their trimethylsilyl ethers to the spectrum of indane. The infrared spectra of the samples are consistent with indenol structures.

EXPERIMENTAL

The 4- and 5-indanols used in this work have been obtained from Aldrich Chemical Co. and Rutgerswerke A. G. (Germany).

Design of Pyrolysis Column

The column used for dehydrogenation of indanols is a stainless steel tube, 100 cm. long, with an O.D. of 25 mm. The lower 90 cm. of the tube is wrapped with 33 feet of #20 B&S nichrome wire covered with porcelain insulator beads. The furnace portion

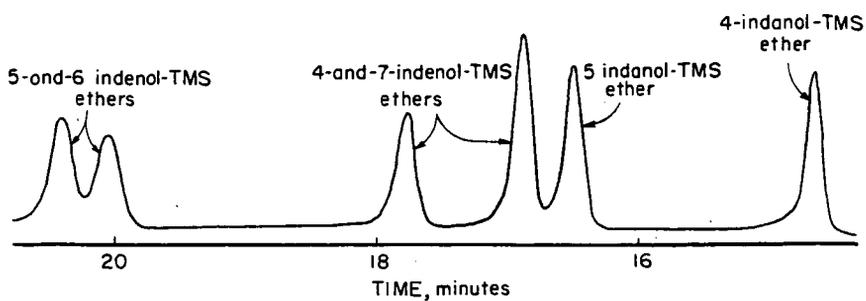


Figure 1.—Gas chromatography on a capillary column of a mixture of trimethylsilyl ethers of indanols and indenols

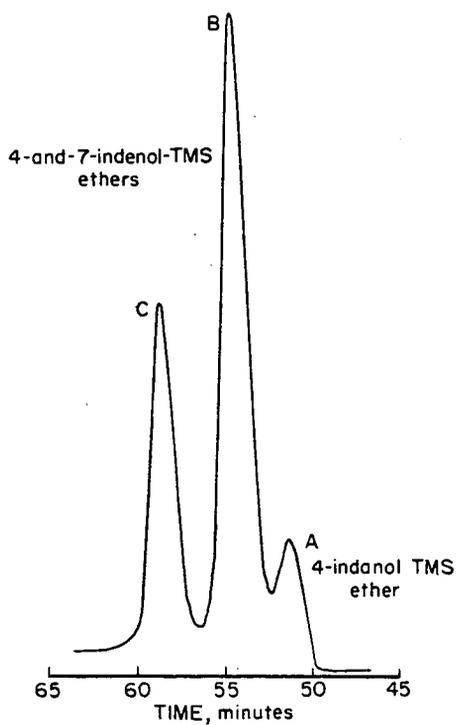


Figure 2.—Gas chromatography on a packed column of indanol-indenol mixture, as trimethylsilyl ethers.

of the tube is jacketed by a piece of asbestos pipe insulation. To the bottom of the tube is welded an outlet tube of 8 mm. O.D. stainless steel leading to one or more cold traps by means of rubber tubing. The top of the column has a rubber stopper containing a needle-valve controlled addition funnel, a stainless steel thermocouple well extending approximately 50 cm. into the tube, and a hypodermic needle for admitting nitrogen. The packing consists of a lower layer (10 cm.) of glass beads, a layer of catalyst approximately 60 cm. in length, and a top layer of glass beads. Preheating tapes are wound around the top 10 cm. of the tube and also around the addition funnel.

Preparation of Catalyst

A solution of 225 grams of ammonium dichromate and 450 grams of aluminum nitrate nonahydrate in 1500 milliliters of distilled water was warmed to 80° C. Ammonium hydroxide was added until precipitation was complete. The precipitate was filtered and dried at 110° C and then decomposed at 500° C. The powder was pelleted with 4 percent aluminum stearate to 1/8-inch diameter pellets. The catalyst was activated by heating to 570° in a stream of air.

Preparation of 4-Trimethylsiloxyindane

A solution of 20 grams of 4-indanol in 30 milliliters of hexamethyldisilazane was refluxed overnight under nitrogen. The excess hexamethyldisilazane was removed by distillation and the trimethylsilyl ether distilled under vacuum (bp 86-88 at 5 mm.).

Dehydrogenation of 4-Trimethylsiloxyindane

While a stream of nitrogen was flowing through the pyrolysis column, 30 grams of 4-trimethylsiloxyindane was allowed to drip onto the column at a rate of 30 grams per hour. The column temperature was kept at 650° C. The product was collected in three traps, the first of which was cooled in acetone/dry ice and the other two, which contained a mixture of benzene and petroleum ether, were cooled in ice water. The solvent was evaporated from the combined trap contents to yield over 25 grams of crude product. Gas chromatographic examination showed the presence of some 4-indanol (as its trimethylsilyl ether) as well as traces of solvent. The major portion of the material appeared to be 4- and 7-indenols (as their trimethylsilyl ethers). This was confirmed by mass spectrometric analysis.

A portion of the crude indenol trimethylsilyl ether was refluxed overnight in ethanol to hydrolyze it to the indenol. The indenol was recrystallized from carbon tetrachloride and from petroleum ether to give needles, mp 77.5-79° C. Calcd. C_9H_8O : C, 81.79; H, 6.10. Found: C, 82.07; H, 6.46.

A sample of this indenol was converted to its trimethylsilyl ether for gas chromatographic analysis. This showed the complete absence of indanol. Two gas-chromatographically separable components were present in a ratio of about 4 to 1.

Dehydrogenation of 5-Trimethylsiloxyindane

In a similar manner, a mixture of 5- and 6-trimethylsiloxyindane, having a gas chromatographic peak ratio of 4 to 3, was prepared by dehydrogenation of 5-trimethylsiloxyindane (bp 97-99 at 6-7 mm.). The material was converted by refluxing in ethanol to the indenol, mp 78-79.5° C. Calcd. for C_9H_8O : C, 81.79; H, 6.10. Found: C, 81.92; H, 6.20.

Dehydrogenation of 5-Indanol

While a stream of nitrogen was flowing through the pyrolysis column, molten 5-indanol was dripped onto the column at a rate of 30 grams per hour with the column temperature at 650° C. The product was collected in an ice cooled trap. Gas chromatographic examination of the trimethylsilyl ethers of the product showed it to be largely 5- and 6-indenols.

Figure 1 is a chromatogram of a synthetic indanol-indenol-TMS ether mixture run on a 150-foot x 0.01-inch I.D. capillary column coated with Ucon LB-550-X (a polyalkylene glycol containing an oxidation inhibitor). This capillary column is mounted in a Perkin-Elmer 154 Gas Chromatograph equipped with a hydrogen-flame ionization detector.

The compounds shown in Figure 1, in order of emergence, are: 4-indanol-TMS ether, 5-indanol-TMS ether, 4- and 7-indenol-TMS ethers, and 5- and 6-indenol-TMS ethers. Previous work on a 20-foot by 1/8-inch packed column containing DC 550 silicone oil showed that the 4- and 7-indenol-TMS ethers could be separated, but not the 5- and 6-indenol-TMS ethers.

The conditions used to obtain the results shown in Figure 1 were: column temperature, 151° C; flash vaporizer temperature, 212° C; inlet pressure of N₂ carrier gas, 17.9 psi gauge.

In addition, larger samples were run on a column made from a piece of copper tubing, 610 cm. x 0.30 cm. I. D., coiled as a helix, and containing 12.4 grams of packing, made up in the weight ratio of 8 parts of D.C. 550 silicone oil to 92 parts of 60-80 mesh aqua regia washed Chromosorb. This was mounted in a Burrell K-3 Gas Chromatograph.

Figure 2 is a chromatogram of an indanol-indenol trimethylsilyl (TMS) ether mixture obtained by liquid-liquid chromatography run on this 20-foot silicone column. On the basis of relative retention-time measurements, peak A in Figure 1 is 4-indanol-TMS ether. Peaks B and C are believed to be the 4- and 7-indenol-TMS ethers.

Liquid-Liquid Chromatography of Indenols

The packings for the liquid chromatography experiments were made by absorbing an aqueous AgNO₃ solution onto dry Chromosorb. The AgNO₃ solution in a polyethylene squeeze bottle was sprayed in small increments onto the Chromosorb (in a flask), which was rotated and mixed between successive additions of the AgNO₃ solution.

The "wet" packing (which is still free-flowing) was then put into a glass column 69-inches long and of 3/4-inch inside diameter for the top 30 inches and 1/2-inch inside diameter for the bottom 39 inches. The glass column was jacketed to allow for passing cooling water or refrigerant around the chromatographic column.

The liquid-liquid chromatographic separation on an indanol-indenol mixture was made using a packing which contained 46.3 grams of AgNO₃ solution (60 grams AgNO₃/100 grams solution) per 110 grams of 80-100 mesh Chromosorb. This "wet" packing, 114.2 grams, was packed into the glass column described above. The sample of 0.60 gram of 4-indanol pyrolyzate (recrystallized from heptane) was dissolved in 40 milliliters of heptane, put onto the column, and eluted with 400 milliliters of heptane. During the run, the column was at room temperature. Selected 12-milliliter fractions (chosen on the basis of their refractive index) of the eluate were combined and evaporated to dryness (35° C maximum temperature). The phenolic residues were converted to their trimethylsilyl ethers, and analyzed by gas chromatography. The only substance eluted from the column was 4-indanol; the indenols were held on the column packing. After the heptane-eluted indanol had come out of the column, methyl isobutyl ketone (MIBK) was used and the indenol was then eluted in the MIBK-containing fractions.

The solvent from the indenol-containing fractions was evaporated off, and the trimethylsilyl ethers prepared from this phenolic mixture. This preparation contained a fine blackish precipitate, which suggests that the indenol was eluted from the column as a silver complex or salt, which was then decomposed during the preparation of the trimethylsilyl ethers, depositing metallic silver.

Preparation of Ion Exchange Column Containing Ag⁺

A chromatographic column was filled with 200 grams of 50-100 mesh Dowex 50-X8 cation exchange resin. An aqueous silver nitrate solution containing 95 grams of silver nitrate was poured through the resin filled column. The resin was washed with water and then air-dried. The silver impregnated resin was packed into the chromatographic column.

Separation of 5-Indanol and 5(6)-Indenol

A mixture containing 2 grams of 5-indanol and 5(6)-indenol was dissolved in a minimum amount of acetone and poured into the prepared column which had been wet with 60-68° petroleum ether. Elution was carried out with petroleum ether. Gas chromatographic examination of the eluate showed that only 5-indanol was present. Elution with chloroform removed the 5(6)-indenol, along with a small quantity of 5-indanol.

When larger amounts of indenol were put on the column, some indenol eluted with the indanol fraction. Elution with chloroform then gave pure indenol.

References

- 1/ (a) Sharkey, Jr., A. G., Wood, G., Shultz, J. L., Wender, I., and Friedel, R. A. Fuel, 38, 315-328 (1959); (b) Dean, R. E., White, E. N., and McNeil, D. J. Appl. Chem. (London), 1959, 629-641.
- 2/ Koelsch, C. F. and Scheiderbauer, R. A. J. Am. Chem. Soc., 65, 2311-2314 (1943).
- 3/ Ingold, C. K. and Piggott, H. A. J. Chem. Soc., 123, 1469-1509 (1923).
- 4/ Webb, G. A. and Corson, B. B. Ind. Eng. Chem., 39, 1153-1156 (1947).
- 5/ Friedman, S., Kaufman, M. L., Steiner, W. A., and Wender, I. Fuel, 40, 33-46 (1961).
- 6/ Nichols, P. L. J. Am. Chem. Soc., 74, 1091-1092 (1952).
- 7/ de Vries, B. Chem. and Ind., 1962, 1049-1050.
- 8/ Helfferich, F. Nature, 189, 1001-1002 (1961).
- 9/ Wheland, G. W. Advanced Organic Chemistry, John Wiley & Sons, Inc., New York, 1960, pp. 631-632.
- 10/ A Catalog of the Nuclear Magnetic Resonance Spectra of Hydrogen in Hydrocarbons and Their Derivatives, 2nd printing, 1959, Humble Oil and Refining Co., Baytown, Texas.

The Design and Operation of Fluidized-Catalyst
Phthalic Anhydride Plants.

H. L. Riley

United Coke and Chemicals Company, Limited,
Rotherwood Laboratories,
Sheffield, 13.

The catalytic oxidation of naphthalene to phthalic anhydride by atmospheric oxygen is a reaction admirably suited for a fluidized reactor. Early attempts to produce phthalic anhydride on a commercial scale by this means ran into serious difficulties. This was because of mistakes in design and a lack of appreciation of many of the factors involved. It is proposed in this paper to describe how these difficulties have been overcome and also to indicate the essential features in design and operation for the trouble-free manufacture of phthalic anhydride by this method.

Fluidized-bed v. Fixed-bed.

Phthalic anhydride has been manufactured by the oxidation of naphthalene in fixed-bed reactors for more than forty years. During this time considerable design and operational experience has been accumulated. Nevertheless, it is widely known that such reactors have inherent defects which make impossible the desired control of reaction conditions. The advent of the fluidized-bed reactor has made possible not only a much closer approach to these ideal reaction conditions but also several other important advantages which favourably influence the economics of the process. Fig. 1. is a flow diagram of a fluidized-catalyst phthalic anhydride plant and below are listed some of the important advantages gained by this method of manufacture.

- (a) Greater Safety. The presence of finely divided catalyst in the reactor prevents explosions and so permits operation well inside the explosive range of air:naphthalene ratios.
- (b) More precise control of reaction conditions. The high thermal conductivity and good heat-exchange characteristics of this fluidized-catalyst bed permits an exact control of reaction temperature without the formation of hot spots. Temperatures varying only by one or two °F. can be held throughout a fluidized bed containing up to 30 tons of catalyst or more. Pressure, temperature, air:naphthalene ratio and contact time can each be varied, independently and quickly, so permitting a rapid and exact adjustment of operating conditions to meet particular requirements.
- (c) More efficient condensation of phthalic anhydride. A substantially lower air:naphthalene ratio makes possible the more efficient condensation of the reaction product because of its greater partial pressure in the product gases. Operating the reactor at increased pressure permits the condensation of 50% or more of the product directly as liquid, the balance being condensed as solid in switch condensers. The lower concentration of oxygen in the product gases, compared with that obtaining in fixed-bed plants, reduces the hazard of fire and explosion down stream from the reactor.

- (d) Liquid naphthalene feed. Fixed-bed phthalic anhydride reactors are fed with a mixture of air and naphthalene vapour involving the use of a separate evaporator. This can give trouble. With a fluidized-catalyst reactor liquid naphthalene is pumped directly into the reactor.
- (e) Catalyst charging. The tedious operation of charging catalyst pellets into the tubes of the fixed bed reactor is avoided. On the fluidized-bed plant catalyst can be moved pneumatically from the reactor to the catalyst storage vessel or in the opposite direction, even whilst the plant is operating.
- (f) Operation at increased pressure. The operation of fluidized-catalyst reactors at increased pressure (1 to 2 atm. gauge) permits a substantial increase in the output of a particular unit compared with its capacity at atmospheric pressure. Air compression cost must be balanced against higher throughput in order to determine the optimum operating pressure. The removal of the additional heat liberated as throughput is increased presents no serious design problems.
- (g) High purity product. The precise control of reaction conditions in a fluidized catalyst reactor results in the formation of a crude product of high purity. The redistillation process is thereby considerably simplified, and a final sales product of a high standard of purity is obtained. Table 1. gives the results of the analyses of a number of commercial samples of phthalic anhydride all taken independently and analysed blind. The higher quality of the samples from the fluidized-catalyst plants is apparent.

R. Landau and H. Harper (7) have given a critical, historical review of the development of phthalic anhydride technology. They mention the difficulties that have troubled the pioneers of the fluidized catalyst process. How these difficulties have been overcome is described below.

Condensation

The early fixed-bed phthalic anhydride plants were small and operated with high air:naphthalene ratios. The product was condensed in the so-called barns or hay boxes, which were large vessels, usually several in series. They served to slow down the gas velocity and wire net in the boxes provided additional surface for the condensation of the needle-shaped crystals of phthalic anhydride. The natural cooling of the boxes was usually sufficient for efficient condensation. With large production units, however, such barns are impracticable on the grounds of cost, danger and difficulties in handling the solid product. In modern plants they have been replaced by tubular heat exchangers operated as switch condensers. During condensation the tubes are cooled by water or oil at 35 to 40°C. Lower temperatures would promote the condensation of excessive amounts of water vapour with the concomitant formation of phthalic and maleic acids. For melting out, the cold water is replaced by high pressure steam and the cold oil by hot oil. A temperature high enough to dehydrate phthalic acid is essential otherwise it will accumulate inside the condenser reducing its efficiency and capacity and finally causing blockages.

Different types of tubular switch condensers have been described (3, 12); some are too complicated to be practicable in large production units. Besides simple heat-exchange considerations, other factors are involved in the design of efficient switch condensers. e.g., (1) Spare capacity is necessary to permit periodic cleaning of the tube bundles without interrupting production. (2) The capacity of the individual condensers must be such that the switch operation is relatively infrequent, otherwise there would be an excessive thermal load due to the relatively high heat capacity of the condensers which could be even more than the heat required to melt the phthalic anhydride. (3) The construction of the condensers should be such that

TABLE 1.

Source of Sample	Phthalic Anhydride %	Phthalic Acid %	Maleic Anhydride %	Naphtha-quinone %	Iron p.p.m.	Ash %	Crystallising Point °C	Colour Hazen Units	Colour after 2 hours at 250°C Hazen. Units
Fixed Bed A.	99.4	0.17	0.02	not detected	1.7	0.0006	130.6	45	113
Fixed Bed C.	99.1	0.65	0.17	"	2.0	0.0056	130.3	100	250
Fixed Bed E.	99.3	0.59	0.04	"	0.4	0.0010	130.3	90	225
Fluid Bed B.	99.6	0.08	0.01	"	0.4	0.0004	130.9	30	77
Fluid Bed D.	99.7	0.15	0.02	"	1.0	0.0028	130.8	65	97
Fluid Bed F.	99.3	0.40	0.01	"	1.9	0.0002	130.5	30	70
Fluid Bed G.	99.5	0.40	0.08	"	0.7	0.0004	130.7	25	60

the heat capacity is kept to a minimum. The oil system for cooling and melting is therefore preferred rather than the water/high pressure steam system. (4) The design should be such as to minimize or eliminate fire and explosion hazards. This can be achieved by the use of a closely packed gilled tube bundle. (5) It is not sufficient in condensers of this type merely to provide adequate cooling surface. Provision must also be made for ensuring that the product gases have the opportunity of contacting preformed phthalic anhydride crystal surfaces, otherwise even with more than adequate cooling, solid deposition will not necessarily occur. Fig. 2. shows a 6 ft. length of finned tube enclosed in glass pipe-line. The tube was cooled by passing water through it. Air saturated with phthalic anhydride vapour at 140°C was passed downwards through the annulus between the finned and the glass tubes. Solid phthalic anhydride was deposited on preformed crystals rather than on the cooler base portions of the finned tube. Vapour super-saturated with phthalic anhydride will leave the tube if the speed of the gas exceeds a low minimum value.

Fig. 3. shows diagrammatically a switch condenser which meets these requirements (14, 15). It consists of a relatively light gauge steel box packed with rows of vertical gilled tubes connected to manifolds. During the condensation part of the cycle, cold oil (40°C) is passed through these tubes. The product gases from the fluidized reactor enter the condenser and at first pass at relatively low velocity, more or less straight through the banks of gilled tubes. Massive, solid phthalic anhydride condenses on the first banks which become blocked and an increasing amount of the product gas passes through the gaps at the ends of the banks of gilled tubes. These gaps at opposite ends of adjacent rows prevent excessive build up of back pressure before a substantial quantity of phthalic anhydride is condensed. The increased gas velocity as the gas flows parallel to the rows improves heat exchange and gives good contacting of the product vapours with preformed phthalic anhydride crystals. As the product gases progress through the condenser the concentration of phthalic anhydride decreases and condensation occurs on the later banks of gilled tubes in the form of long needles. The close packing of the tubes no doubt also has a filtering action on any gas borne particles of phthalic anhydride.

At a predetermined time a condenser is taken off stream and the cold oil replaced by hot. The phthalic anhydride melts and is run to storage. The hot oil is then switched back to cold; after a period for cooling the empty condenser is again put on stream. It is essential to use a thermally stable oil for this purpose.

The United Coke and Chemical Company's plant operates on eight of these switch condensers together with a ninth stand-by for periodic special cleaning. At normal throughput a sequence of six condensing and two melting is employed. The capacity of the boxes is such that switching is carried out at long intervals and little or no advantage would be gained from automatic operation. Analyses have shown that a small amount of slip takes place at the commencement of the condensation i.e., when the tube surfaces are clean and cooling must be at its best, but when there is little or no solid phthalic anhydride to promote condensation. Long intervals between switching reduces the loss by slip to a very low value.

These condensers have been tested for long periods with air:naphthalene ratios as high as 30:1 and the results obtained indicate that they could be used advantageously with fixed-bed reactors.

Fluidized-catalyst reactors, operating with low air:naphthalene ratios and at increased pressure can advantageously condense an appreciable proportion of the product directly as liquid (2) and so decrease the thermal load on the switch condensers.

Filtration

In order to prevent contamination of the product and loss of an expensive catalyst it is essential in a fluidized-bed phthalic anhydride plant efficiently to filter the product gases. Early design proposals (4) suggested the use of cyclones. In the first production unit, the Sherwin Williams Company (5) developed the use of porous ceramic filters for the complete elimination of the catalyst dust at high temperature. Porous stainless steel filters have been used in pilot plants. The United Coke and Chemicals Company (13) have developed a fibre-glass filter. It consists essentially of a perforated steel cylinder (Fig. 4) having a spigot at each end. The upper spigot is threaded and serves to connect the filter to a collector box. The lower spigot is closed and serves to protect the filter. It also acts as a journal whilst the filter is being wrapped. The wrapping, which is done on a simple machine, consists of alternating layers of continuous-filament glass cloth and super-fine fibre-glass mat. The first 5 layers (3 cloth and 2 mat) are held in position by an open wound helix of glass tape. Another similar series of cloth, super-fine mat, cloth and tape, is added followed by an overlapping spiral wrap of glass tape and the whole bound firmly but not too tightly with jubilee or similar metal clips at 18" intervals. The overlapping ends of the glass cloth are secured in grooves at the two ends of the filter tube, by means of fibre-glass cord. This is an additional precaution to prevent end leakage. Four separate collector boxes are used, each carrying several of these fibre-glass filters. By means of a process controller each bank of filters can be blown back in turn to detach filter cake from the outer surface. More than ten years of operational experience has shown that these filters are a reliable means of obtaining 100% filtration of catalyst dust from the product gases at a temperature of about 300°C. They have advantages over porous ceramic filters in that they are not brittle, they can be quickly and relatively cheaply re-wrapped and if necessary, can be made to operate at low back pressure. On blow-back, the slight "give" in the fibre-glass wrapping tends to cause better removal of the accumulated filter cake. The back pressure across the filters depends, of course, on the surface area of the filter and the volume of gas passing. It is customary to operate fluidized-catalyst phthalic anhydride plants under pressure so a filter pressure drop of 4 to 6 lb. p.s.i. or more can be accommodated. Filter candles up to 12 ft. in length have been successfully used. Experiments have also been carried out in which these filters have been operated at 10 to 20 ins. w.g. back pressure for prolonged periods at 300°C.

The positioning of the filtration unit in the plant is important and is discussed below.

The Fluidized-bed Catalyst.

The physical and chemical nature of the catalyst is of great importance for the trouble-free operation of a large fluidized-bed phthalic anhydride plant. Not only must it have high and specific reactivity but also good fluidizing properties, high attrition resistance and long life. The catalysts used in the early days of this new technique were formulated on the grounds of their catalytic activity with little or no attention to their fluidizing properties and attrition resistance. It is possible in laboratory apparatus and small pilot plants to obtain reasonably good fluidization and excellent conversions of naphthalene into phthalic anhydride with a wide range of catalysts. Nevertheless, in full scale reactors troubles can arise from the use of friable catalysts with the consequent rapid accumulation of an excessive proportion of fines in the fluidized bed. This may bring about uneven fluidization and an undesirably high concentration of fines in the expanded phase. Both these states can give rise to trouble; the latter is probably a contributory cause to "after burning" (see below), whilst the former may bring about the formation of static pockets of catalyst. Such pockets in contact with the reactor walls can act as naphthalene condensers. The mixture of solid naphthalene and catalyst so

formed, if suddenly disturbed and ignited can react very vigorously with the production of excessively high temperatures within the fluidized bed.

Fluidized-bed phthalic anhydride catalysts must have a fairly high specific surface and a relatively large pore diameter. These properties are not compatible with high attrition resistance so it is necessary to compromise. It has been found possible to formulate a highly specific catalyst with the required attrition resistance and long life. In a favourably designed reactor, size degradation is surprisingly slow and present indications are that it should be possible to maintain the activity and good fluidizing properties of the catalyst with a replacement level as low as 10% per annum.

After Burning

One of the most serious and dangerous difficulties which beset pioneers in this field was "after burning", i.e. the ignition of the product vapours above the fluidized-catalyst bed with a consequent excessive and sometimes disastrous rise in temperature. This has already been described in some detail (1). In the absence of effective temperature control in the expanded phase, temperatures as high as 750 to 1000°C or more may be reached with consequent serious damage to the filters, catalyst and reactor. The most likely explanation of this phenomenon is excessive slip of naphthalene through the fluidized catalyst dense phase occasioned by poor fluidization, particularly slugging, spouting, rat-holing or an excessive proportion of bubble phase in the boiling bed. A small amount of particularly active, static catalyst lodged somewhere above the fluidized-bed possibly starts the exothermic oxidation of this naphthalene. (11) and with a relatively rapid rise of temperature initiates the after burning. Whatever the cause, after burning can be prevented by keeping the temperature of the expanded phase well below that of the bed. Various methods of doing this can be used:-

- (1) Cooling tubes in the expanded phase. Although the heat-exchange coefficient on the gas side of the tubes is not favourable, the dust concentration in the gas increases the amount of cooling over that which would obtain with a clean gas.
- (2) Quench Zone. A specially cooled extension of the fluidized bed to cool the gases leaving the reaction zone has been described by the American Cyanamid Company (1). It necessitates the use of an additional distributor plate, special cooling coils and a standpipe. This upper part of the fluidized bed is termed the "quench zone" and it is recommended that the temperature of this zone is kept at least 50°C below that of the main fluidized bed. Such an arrangement could, if not properly designed and operated, lead to an increased rate of catalyst attrition (see below).
- (3) Quench Gas. The temperature above the bed can be effectively controlled by the introduction of cold air, or better, cold inert gas. This simple and practicable method has the advantage of reducing the concentration of phthalic anhydride in the product gases, which, of course, is not good from the condensation angle.
- (4) Recycling cooled catalyst. Recycling cooled catalyst through the expanded phase can be used to cool the gases leaving the boiling bed. This, however, may result in increasing catalyst attrition to an objectionable rate.
- (5) External cooling. If the catalyst filters are housed in separate vessels, then it is possible to cool the product gases by utilizing the surface of the interconnecting pipe-lines. This is effective in preventing after burning but involves catalyst circulation at high velocity, which may contribute to catalyst attrition (see below).

Another factor which makes an important contribution to minimising the risk of after burning is low oxygen partial pressure in the product gases. This is achieved by operating at the lowest possible air:naphthalene ratio compatible with crude product purity and bed temperature.

Trouble from after burning has been virtually eliminated from modern fluidized-catalyst phthalic anhydride plants by the use of one or more of the above devices.

Reactor Design and Catalyst Attrition

There is an upper limit to the attrition resistance which can be built into an acceptable naphthalene oxidation catalyst. Reactor design should therefore be such as to keep catalyst attrition to a minimum; otherwise excessive catalyst replacement will be necessary in order to prevent a built up of an excessive proportion of catalyst fines. This also places a limit on the fluidizing gas velocity and emphasises the important advantage of operating fluidized-catalyst reactors at increased pressure in order to obtain the necessary contact time and economic throughput. Three design features are involved in minimising catalyst attrition viz., (1) the disposition of the catalyst cooler, (2) the disposition of the filters and (3) the distributor plate. These are discussed below.

- (1) The Catalyst Cooler. Some of the earlier patents (16) describe fluidized catalyst reactors having external heat exchangers. These require the pneumatic conveying of catalyst at high velocity through transfer pipes and the narrow tubes of the heat exchangers. The action of the frictional and impact forces involved on the catalyst particles, particularly so when sudden changes in direction are involved, must increase the rate of attrition. The consequent more rapid build up in the concentration of catalyst fines not only gives rise to the difficulties mentioned above but must also decrease the efficiency of the cooling system. R. M. Braca and A. A. Fried (5) have described the attrition which occurred in a fluidized-catalyst phthalic anhydride plant. No catalyst make up was used and after two years operation the proportion of catalyst particles less than 20 μ had increased from 9 to 48 per cent. This fine material plated out on the tubes of the catalyst cooler and about half of them gradually became blocked. The installation of cooling tubes within the fluidized-catalyst bed overcomes this drawback. The excellent thermal conductivity of the fluidized catalyst and the good heat-exchange characteristics of the system make this possible.
- (2) The Filters. Commercial phthalic anhydride plants differ in the disposition of the catalyst filters. Some of them house the filters in a number of separate vessels, each connected to the top of the reactor by a pipe-line. The catalyst fines which accumulate on the surface of the filters are periodically blown off and conveyed back into the base of the fluidized-bed by means of some of the fluidizing air. The attrition to the catalyst fines thereby caused will, of course, be much less than that which would obtain if coarser particles were involved. Nevertheless, it will make some contribution to the rate of catalyst attrition.

Other phthalic anhydride plants have the filter units located in the top of the reactor itself. On blow-back, the catalyst filter cake falls back into the reactor and the transfer of catalyst at high velocity through pipe-lines is thus avoided. This simple arrangement of filters, however, makes somewhat more difficult the problem of cooling the product gases issuing from the boiling catalyst bed. An increase in the height of the knock-out zone above the fluidized bed overcomes this difficulty.

- (3) The Distributor Plate. In the fluidized-catalyst reactor it is important to establish reasonably uniform distribution of air and naphthalene vapour across the whole bed, otherwise the air:naphthalene ratio would vary from place to place and hinder the attainment of optimum reaction conditions. The height:diameter ratio of the fluidized-catalyst bed and the low density of the catalyst are both favourable to good fluidization. Nevertheless, in a large fluidized reactor, say 10 ft. diameter or more, it is essential to operate with an appreciable pressure drop across the distributor plate, otherwise there is a danger of uneven air distribution. Various methods of attaining even distribution have been proposed. e.g., (a) the use of multi-jets instead of holes (9); (b) the gas is introduced through a flared, conical-shaped zone at the base of the reactor, high turbulence being maintained in this zone and a distributor plate is not used (8). Another proposal (17) is to subject the reactor, which has a conical bottom, to vertical linear oscillations, 100 per sec., with an amplitude of 1.5 mm. These methods would lead to additional catalyst attrition, particularly the one using high velocity jets. T.J.P. Pearce and I.C.I. Ltd., (10) have suggested the use of a suitable porous ceramic plate. Its maintenance in a large reactor would possibly be difficult. A method of obtaining any desired pressure drop across a distributor plate without high velocity air streams increasing catalyst attrition would be by use of the device shown in Fig. 5. Instead of a simple hole the small conical filter elements are inserted in the distributor plate. The entry holes to the filters could be made small enough to give back pressure necessary for good distribution. The air used for fluidization would have to be filtered to prevent the slow clogging of the small filters from the underside.

It is not difficult in a laboratory fluidized reactor, or in a pilot plant reactor to obtain relatively uniform fluidization and consequently a high degree of control of reaction conditions. This is evidenced by the results given in Table 2.

TABLE 2.

Results obtained in a 2 in. diam. laboratory fluidized-catalyst reactor using pure naphthalene (0.07% S).

Temp. °C	Air:Naphthalene Ratio	Yields % w/w.		
		P.A.	M.A.	N.Q.
350	15:4	104.5	1.7	0.7
330	11:5	104.1	1.1	0.9
320	14:0	104.2	1.5	1.2

Pilot plant results obtained in a 6" diam. fluidized-catalyst reactor using petroleum naphthalene (S free) c.p. 79.4°C.

Temp. °C	Air:Naphthalene Ratio	Crude Yield %	Analysis of Crude %		
			P.A.	M.A.	N.Q.
335	15:1	100.2	98.0	0.09	1.6
340	15:1	99.7	98.5	0.13	0.7
350	15:1	99.8	97.9	0.19	1.1

It is possible that the quality of fluidization and distribution in a full scale plant can be assessed by their approach to laboratory results.

Sulphur in Naphthalene

The principal impurity in phthalic grade, coal tar naphthalene is thionaphthene which boils only 4°C above the b.p. of naphthalene. Naphthalene derived from tar from sulphurous coals may contain 1% sulphur, which is equivalent to 4.19% thionaphthene. Catalysts which have been used in the past in fluidized-bed reactors have tended to deactivate when sulphurous naphthalene is used as the feed (6). It has been stated that sulphur-free naphthalene (sodium treated) is required for optimum conversion to phthalic anhydride. This is no longer so as a sulphur-resistant fluidized-bed catalyst is now available. It has also been claimed (18) that the presence of sulphur in the naphthalene is advantageous in preventing catalyst deactivation. The oxidation of thionaphthene, however, cannot yield phthalic anhydride, so its presence in naphthalene must mean an equivalent loss of phthalic anhydride yield.

In order to determine whether or not excessive amounts of thionaphthene had any deactivating action on the new fluidized-bed catalyst the following work was carried out. Naphthalenes were prepared containing increasing proportions of thionaphthene (0 to 4.75% S) as the principal impurity. These were oxidized with air in a laboratory fluidized catalyst apparatus. The results obtained are shown in Fig. 6. There is a proportionate falling off in the phthalic anhydride yield as the thionaphthene content of the naphthalene feed increases and there is also a steady increase in the maleic anhydride yield. A final oxidation using again a sulphur-free naphthalene feed gave results quite close to those obtained initially, indicating that the excessive proportion of sulphur had not deactivated the catalyst. A sulphur free naphthalene gives a proportionately higher yield and probably also, less corrosion in the condensation system. The lower maleic anhydride content of the crude product will probably reduce distillation losses during the final purification. Whether or not pure or sulphurous naphthalene should be used as feed for a fluidized phthalic anhydride plant is a question to be answered by the economics of the operations.

Pilot plant experiments in a 6" diam. fluidized catalyst reactor were carried out using two different coke-oven naphthalenes (a) c.p. 77.6°C ; S, 0.87% and (b) c.p. 79.6°C ; S, 0.31% and Ashland petroleum naphthalene c.p. 79.4°C ; S, 0.00%. A range of operating conditions was used for each naphthalene. Table 3 gives the yields obtained under the optimum operating conditions. These results indicate that the presence of thionaphthene in the naphthalene feed does not wholly account for the reduction in yield.

TABLE 3.

<u>Naphthalene</u>	<u>Reaction Temp. °C</u>	<u>Average Yield of Crude %</u>	<u>Analysis of Product %</u>		
			<u>P.A.</u>	<u>M.A.</u>	<u>N.O.</u>
Coke Oven 0.87% S	350	91.3	97.5	0.56	0.6
Coke Oven 0.31% S	340	96.1	98.5	0.18	trace
Petroleum 0.00% S	335	100.2	97.9	0.19	1.1

Conclusion

Apart from the catalytic cracking of petroleum, the development of the fluidized-catalyst technique in the chemical manufacturing industries has been relatively slow. This has been largely due to the state of our fundamental knowledge of the properties of fluidized beds and of heterogeneous catalysis in such beds.

The methods adopted for overcoming the difficulties in developing the fluidized-bed method for naphthalene oxidation described above are already being successfully applied to other processes, particularly to exothermic oxidations. There is little doubt that the success achieved with the phthalic anhydride process will accelerate the wider industrial use of fluidized-bed catalysis.

Literature Cited

- (1) American Cyanamid Co., U.K. Patent 754,665 (Apr. 16, 1953).
- (2) B.A.S.F., A.G., U.K. Patent 787,924 (Aug. 7, 1954).
- (3) Barton E., (to Imperial Chemical Industries Ltd.), U.K. Patent 715,384 (Apr. 4, 1951).
- (4) Becker S.B., (to Standard Oil Co. of Indiana) U.S. Patents 2,373,008 (June 27, 1941), 2,453,740 (Feb. 16, 1945).
- (5) Braca R. M., and Fried A. A., "Fluidization" ed. Othmer D.F., p. 129. Reinhold Publishing Corp., New York, 1956.
- (6) Graham J. J., Way P. F., and Chase S., Chem. Eng. Progr., 58, 96 (1962).
- (7) Landau R. and Harper H., Chem. and Ind., No. 30, 1143 (1961).
- (8) Metallgesellschaft A.G., U.K. Patent 772,864 (May 16, 1952).
- (9) N. V. de Bataafsche Petroleum Maatschappij, U.K. Patent 659,048 (Dec. 9, 1949).
- (10) Pearce T. J. P., (to Imperial Chemical Industries Ltd.), U.K. Patent 683,703 (Jan. 23, 1950).
- (11) Fongratz A. and Scholtis K., Ber. dtsch. Chem. Ges., 76, 1179 (1943).
- (12) Riegler R., (to National Aniline and Chemical Co.), U.S. Patent 2,067,019 (Jan. 5, 1937).
- (13) Riley H. L., and Norris J., U.K. Patent 713,560 (Dec. 17, 1951).
- (14) Riley H. L., Coates R. G., and Norris J., U.K. Patent 751,352 (Mar. 24, 1953).
- (15) Riley H. L., Chem. and Ind., 1464, 1956.
- (16) Riley H. L., Trans. Inst. Chem. Eng., 37, 22 (1959).
- (17) Stamicarbon N. V., U.K. Patent 779,826 (Sept. 17, 1954).
- (18) Wenderlein H., (to B.A.S.F. A.G.) German Patent 1,112,060 (Apr. 3, 1960).

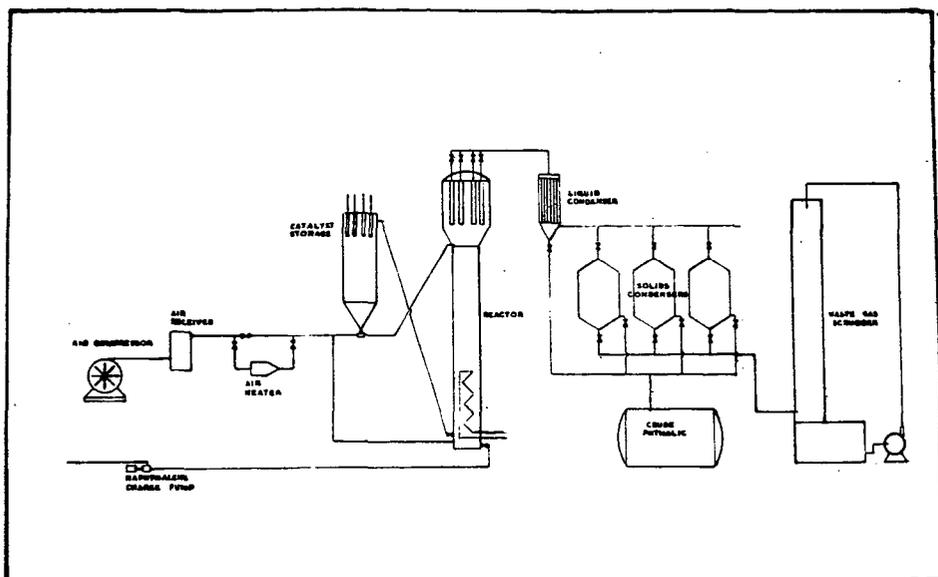


Fig. 1. Fluidized Catalyst Phthalic Anhydride Plant.



Fig. 2. Condensation of phthalic anhydride on cooled finned tube.

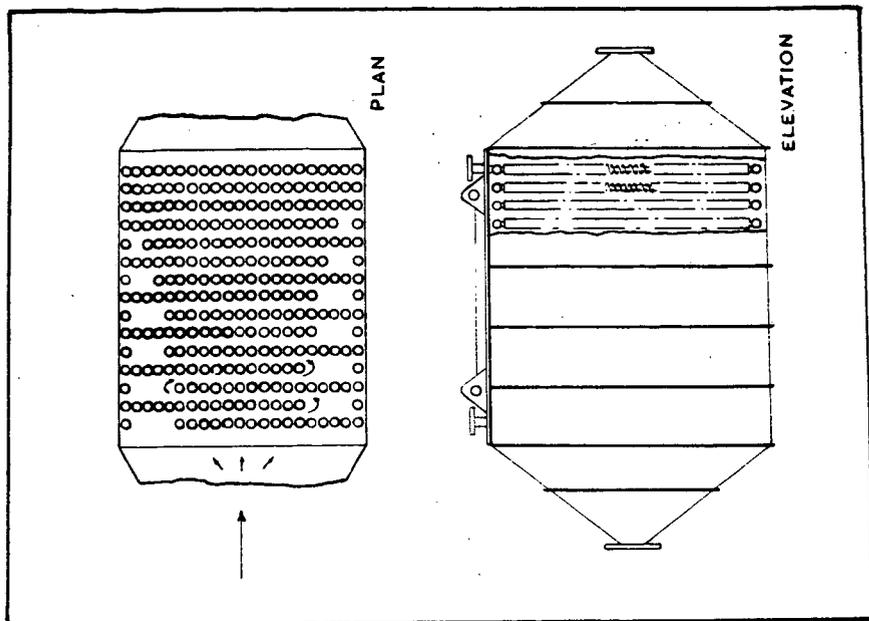


Fig. 3. Switch Condenser.

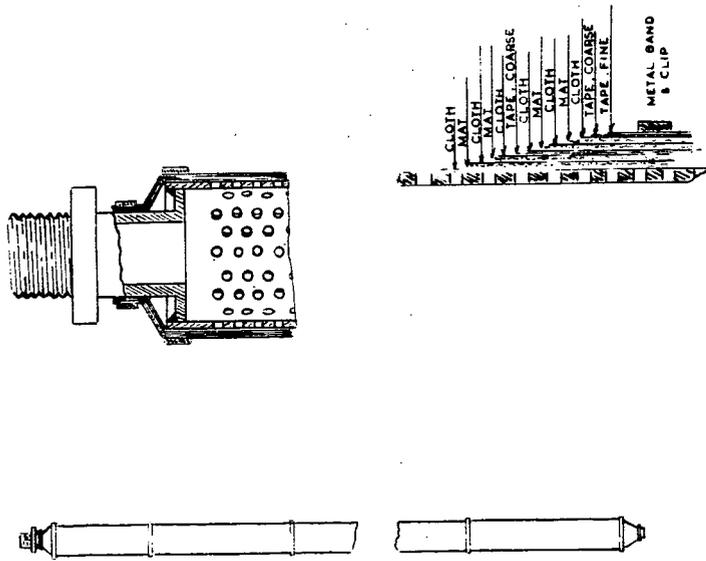


Fig. 4. Fibre-glass Filter.


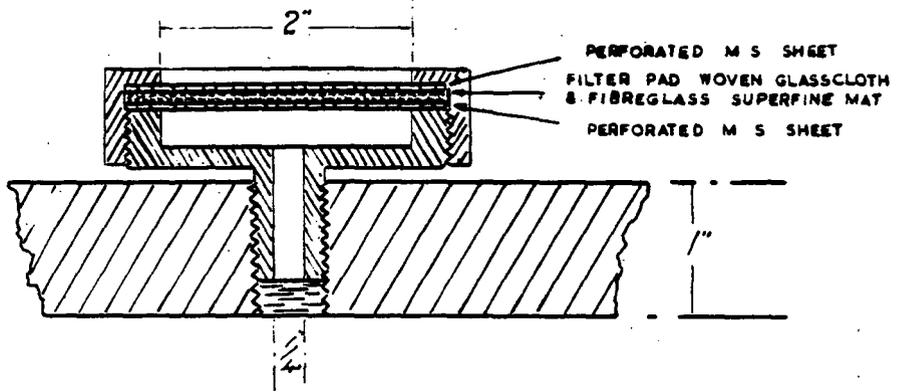


Fig. 5. Distributor Plate Filter.

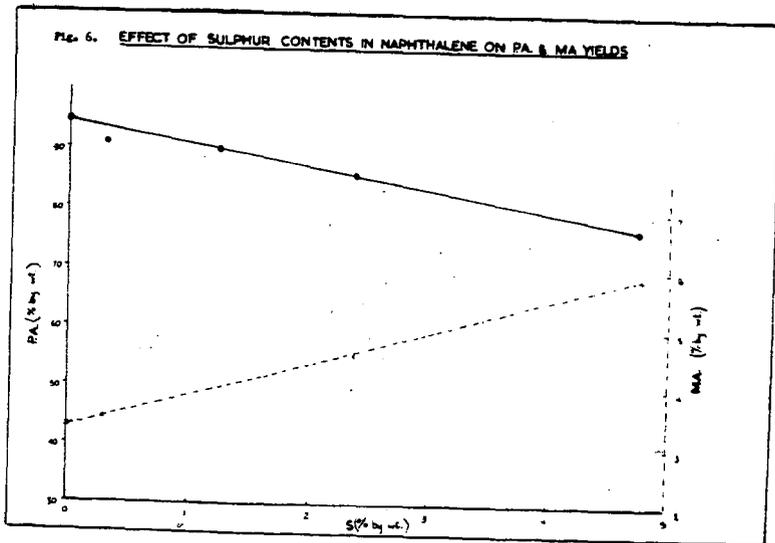

Antioxidants from Tar Acids

Gerd Leston

Koppers Co., Inc., Research Department, Monroeville, Pa.

Before delving into the subject at hand, namely the manufacture of antioxidants from tar acids, it would be wise for us to define our terms and the scope of this discussion. By tar acids we mean the "acidic" or base-soluble fraction of coal tar. These same tar acids are also available from petroleum sources. Furthermore, both phenol, parent compound of the tar acids, and p-cresol are made synthetically. While phenol is the major constituent of tar acids, the synthetic material accounts for over 90% of the market. Its precursors, benzene or toluene, are also coal chemicals which are again mostly derived from petroleum sources. Benzene is also the starting material for styrene, an important chemical intermediate in the antioxidant field. As far as the end products are concerned, we shall limit our discussion to the phenolic antioxidants, realizing at the same time that there are non-phenolic antioxidants prepared from tar acids as there are phenolic antioxidants not prepared from tar acids. It is apparent that the coal tar industry does not enjoy an exclusive position as supplier of raw materials for the manufacture of phenolic antioxidants.

Despite the fact that the coal tar industry was at one time the only producer of tar acids, the early work on phenolic antioxidants was not done by this industry. Rather, those industries manufacturing items subject to oxidative degradation saw a need to stabilize their products and therefore investigated the use of antioxidants. Such industries include gasoline, food and animal feed, rubber and plastics, lubricating and transformer oils. As a result, most of the research, both that dealing with the theoretical aspects of oxidation and inhibition, and that dealing with the development of new and better antioxidants, was carried out by the potential users of antioxidants. Even the manufacture of antioxidants has been almost exclusively in the hands of the users and a few chemical manufacturers.

The application of phenolic antioxidants in the various fields was based on the finding by Moureu and his co-workers (1) that acrolein could be stabilized by the addition of certain phenols in small amounts. The use of stabilizers such as tannin and hydroquinone in rubber was described by Helbronner and Bernstein (2). At the 71st meeting of the American Chemical Society at Tulsa, in April of 1926, Smith and Wood (3) presented a paper entitled "Inhibiting Agents in the Oxidation of Unsaturated Organic Compounds" dealing with the oxidation inhibition in soaps, fats and oils. In the gasoline field, an initial emphasis on color stabilization gave way to gum prevention by inhibitors (4,5).

Closer scrutiny of the type of substances used in these and other applications led to theories on the mechanism of the oxidative degradation, its inhibition, and subsequently, to a more systematic study of the types of compounds which may be used advantageously to perform this function.

Here are several recent references which may serve as a starting point for those who wish to pursue this phase further.

Lundberg⁽⁶⁾ recently edited a monograph entitled "Antioxidation and Antioxidants." Ingold⁽⁷⁾ also reviewed the literature in 1961. A recent paper presented before the Division of Petroleum Chemistry at the last ACS meeting at Atlantic City was that by Hedenburg⁽⁸⁾ of the Gulf Research Laboratories.

In the studies performed to find a correlation between the structure of an antioxidant and its activity, whole groups of substituted phenols were prepared and tested⁽⁹⁻¹⁵⁾ as antioxidants. This led to the finding that sterically hindered phenols, i.e. phenols in which the hydroxyl group is sterically hindered, gave the desired properties. In general, it was found that the more hindered the phenol was, the better was its antioxidant activity. However, only last year it was found by Spacht and his co-workers at Goodyear⁽¹⁶⁾ that too much steric hindrance had a deleterious effect on antioxidant activity.

Let us consider the commercial phenolic antioxidants and the modes of their manufacture. Of primary interest is 2,6-di-t-butyl-p-cresol (I). Some 17 million pounds of this compound was produced in 1961. Even at that, it may not be the phenolic antioxidant made in greatest quantity, but it has been used most widely including all the applications mentioned earlier. It is known in the food industry as BHT (which stands for butylated hydroxy toluene) and the various manufacturers have their own trade name for it.

When we look at the structure we immediately realize that it is the reaction product of p-cresol and a source of t-butyl groups, such as isobutylene, t-butyl chloride or t-butyl alcohol. Of these, the olefin is preferred for ease of operation and for reasons of economics. While synthetic p-cresol is available and is the source of most of the BHT produced, those active in the coal tar field will have realized immediately another source of p-cresol, namely the tar acids. There is one difficulty, however - p-cresol occurs along with its more abundant isomer, m-cresol, from which it cannot be separated by fractional distillation; the two isomers boil within one degree of each other. Various physical means of separation have been investigated but it turns out that conversion to the desired compound, BHT, is one of the simplest means of separating meta- and para-cresol^(17,18,19). This is made possible again by a phenomenon which was mentioned before, namely steric hindrance. When a mixture of meta- and para-cresol is alkylated with isobutylene, the initial products are mono t-butyl derivatives. In the case of p-cresol (II), the t-butyl group enters the position ortho to the hydroxyl group as expected by the stronger ortho-para directing influence of the hydroxyl group over that of the methyl group. Since both ortho-positions are identical, only one compound will be formed. This compound is 2-t-butyl-p-cresol (III). In the case of m-cresol (IV), there are three choices, two dissimilar ortho positions as well as an open para position. However, steric hindrance prevents the introduction of the t-butyl group in the ortho position between the hydroxyl and the methyl groups. As a matter of fact, steric hindrance between a methyl and an adjacent t-butyl group makes the normally more stable position para to the hydroxyl group thermodynamically less stable so that the t-butyl group positions itself ortho to the hydroxyl and para to the methyl group to give us 6-t-butyl-m-cresol (V). Unfortunately, the compound described in the literature for many years^(18,20,21,22) as 4-t-butyl-m-cresol was actually 6-t-butyl-m-cresol⁽²³⁻²⁶⁾. The real 4-t-butyl-m-cresol was not made until about 1948^(27,28,29). The two ortho-t-butylated cresols which are thus obtained as the first reaction products from the treatment of m,p-cresol with isobutylene, are also inseparable by fractional distillation.

Further alkylation produces the dibutyl derivatives; on the one hand, the desired compound, 2,6-di-t-butyl-p-cresol, and, as the m-cresol derivative, the para alkylated 4,6-di-t-butyl-m-cresol (VI). These two compounds, the first, an ortho-ortho dibutylated cresol and the latter, an ortho-para dibutylated cresol have boiling points sufficiently far apart for easy separation by fractional distillation. The

distilled BHT can be further purified by washing and crystallization. When p-cresol is made synthetically, it is not admixed with its meta isomer. The alkylation of pure p-cresol is the same as that described for the mixed isomers.

No mention was made of any conditions for the alkylation nor was the catalyst identified. The reason for these apparent omissions is that a variety of alkylation catalysts, such as sulfuric acid, sulfonic acids, phosphoric acid, boron fluoride and solid catalysts, is possible even if we restrict ourselves to isobutylene as the alkylating agent. Furthermore, each catalyst may be used in various concentrations. These factors permit great latitude in the choice of the other reaction conditions such as time and temperature.

A second antioxidant, which has been known for its activity, but which is not widely used in the U.S., is 6-t-butyl-2,4-xyleneol (VII). I specified the American market, because it is a commercial product of long standing in Great Britain.

Looking at its structure, one will immediately realize its close structural relationship to BHT. The difference between the two compounds is the replacement of one of the o-t-butyl groups in BHT by a methyl group.

As in the case with m,p-cresol, one of the precursors for 6-t-butyl-2,4-xyleneol, namely 2,4-xyleneol (VIII), occurs, in tar acid along with its isomer, 2,5-xyleneol (IX). The ratio of the two is roughly 2:1 in favor of the 2,4-isomer. While other xyleneols are separable from the desired isomer by distillation, the above two isomers boil within one degree of each other.

Again, one can resort to t-butylation not only as a means of obtaining our desired antioxidant but also as a means of separating the two xyleneol isomers. The same principles which have been discussed in the m,p-cresol alkylation apply in the present case. As a matter of fact, the mixture of 2,4- and 2,5-xyleneol may be viewed as a mixture of ortho-alkylated m,p-cresols, the 2,4-xyleneol being the ortho-substituted p-cresol, and the 2,5-xyleneol, the ortho-substituted m-cresol. This makes them comparable to the mono-butyl m,p-cresol, each of which can only be t-butylated further with one group. In the one case, the second group entered the free ortho position to give BHT, and in the second, the para position. In the xyleneols, one also finds that 2,4-xyleneol t-alkylates in the accessible 6-position to give the desired compound, 6-t-butyl-2,4-xyleneol while in the case of 2,5-xyleneol, the 4-position is alkylated to give 4-t-butyl-2,5-xyleneol (X) (19).

The isolation of the desired compound may be accomplished in various ways. One means, which is also applicable to the di-t-alkylation of m,p-cresol, takes advantage of the difference in the reactivity of the two isomers. Therefore, by using a limited amount of the olefin, choosing reaction conditions mild enough to enhance the selectivity, and limiting the reaction time to suppress or at least reduce equilibration, it is possible to alkylate 2,4-xyleneol in preference to the 2,5-isomer (20).

The unreacted xyleneols, now predominantly the 2,5-isomer, are removed by distillation from the 6-t-butyl-2,5-xyleneol.

Another method of isolating 6-t-butyl-2,4-xyleneol made from 2,4-2,5-xyleneol is to carry the reaction further than in the previous example so that 4-t-butyl-2,5-xyleneol is formed in appreciable amounts. The reaction mixture is then added to dilute caustic which dissolves only the non-hindered phenols, namely any unreacted xyleneols and the 4-t-butyl-2,5-xyleneol, but does not react with the hindered 6-t-butyl-2,4-xyleneol. Steam distillation of the mixture then carried over this product (31).

Work carried out during recent years has led to selective ortho alkylation of phenols with open para positions. Based on selective ortho alkylation⁽³²⁾ Neuwirth and his co-workers⁽³³⁾ have devised another route to 6-t-butyl-2,4-xyleneol, starting with o-cresol (XI). t-Butylation under these conditions gives 6-t-butyl-o-cresol (XII) and a Mannich reaction on this with formaldehyde and dimethylamine yields 4-dimethylaminomethyl-6-t-butyl-o-cresol (XIII). This is then treated with hydrogen, to give 6-t-butyl-2,4-xyleneol and dimethylamine as the products of the hydrogenolysis. The amine is then recycled to the Mannich reaction.

The work by Kolka, Ecke and their co-workers in this country^(34, 35) and by Stroh in Germany^(36, 37) has led to an economical synthesis of 2,6-di-t-butylphenol (XIV) which had been known for some time^(38, 39). This compound is presently marketed by Ethyl and it serves as starting material for a number of derivatives which are antioxidants in their own rights.

Besides the t-alkyl derivatives, specifically t-butyl derivatives, of tar acids, the α -methylbenzyl or styryl derivatives of the phenols are of great commercial importance as antioxidants. Specifically, styrenated phenol itself (XV) is probably the alkylated tar acid made in greatest amount for use as antioxidant. This material, however, is not a pure compound, and not even a mixture of positional isomers. Rather, it is the reaction product of the styrenation of phenol, and, therefore, could contain, along with mono-, di- and tri-styryl phenols, phenol substituted with low molecular weight polymers of styrene such as dimers and trimers. These would be the results of a preliminary polymerization of styrene followed by alkylation of phenol with the resultant oligomers. It is obvious that a complex mixture is possible. So-called "alkylated styrenated phenols" are also commercial products. While styrenation may be considered a special form of alkylation, the designation "alkylated styrenated," probably denotes the fact that these products contain both styryl and t-alkyl side chains on phenolic nuclei.

A second major group of phenolic antioxidants include those produced from phenols, especially sterically hindered ones such as t-alkylated phenols, via subsequent reactions. The most important subdivision of these is the group in which two or more phenolic nuclei have been linked together. The bridging of these nuclei may consist of a number of groups, predominantly alkylidene, such as methylidene, or thio groups. On the other hand, the phenolic nuclei may be directly linked to each other. While two routes present themselves for the preparation of these compounds, namely alkylation of the tar acids followed by coupling, and the reverse order, it is the first which is usually practiced to give industrially important antioxidants. Usually, only two phenolic groups are linked. The advantage of these higher molecular weight materials is low volatility, a desirable property both during the processing of polymers in which they find major use, and during the remainder of the life of the articles made from the polymers.

If pure p-cresol rather than a mixture of m- and p-cresol is alkylated with isobutylene, the monobutyl-p-cresol (III) can be readily separated by distillation from the other materials in the reaction mixture. These would be the unreacted p-cresol and BHT. The 2-t-butyl-p-cresol is then reacted with formaldehyde under acidic conditions to give 2,2'-methylenebis (4-methyl-6-t-butylphenol) (XVI)⁽⁴⁰⁾.

In a similar fashion, 2-t-butyl-4-ethylphenol can be prepared from 4-ethylphenol and then converted to its methylenebis derivative.

In the m-cresol series, the most important alkylidene derivative is 4,4'-butylidenebis (2-t-butyl-p-methylphenol) (XVII) obtained as the product from the condensation of 6-t-butyl-m-cresol (V) and butyraldehyde⁽⁴¹⁾. However, since the only source of m-cresol is that admixed with its isomer, p-cresol, and since the two monobutyl derivatives of these could not be separated by distillation, the only

possible source of 6-t-butyl-m-cresol is the dibutyl-m-cresol (VI), which we obtained along with 2,6-di-t-butyl-p-cresol. Partial dealkylation of 4,6-di-t-butyl-m-cresol gives a mixture high in the desired 6-t-butyl-m-cresol along with m-cresol (IV) and unreacted starting material. The dealkylations in the presence of various catalysts take place under more severe temperature conditions than do the reverse alkylations. Two other bisphenols namely 4,4'-methylenebis (2,6-di-t-butylphenol) (XVIII) and 4,4'-methylene (6-t-butyl-o-cresol) (XIX) are now commercial products as a result of selective ortho alkylation. The latter is, of course, a derivative of o-cresol. The preparation of these bisphenols is carried out under basic conditions (42,43,44).

Trisphenols have also been made. However, only one (XX) derived from p-cresol, 2-t-butyl-p-cresol and formaldehyde, seems to be of commercial importance. The preparation of trisphenols is more complex than that of bisphenols. In the latter case only one compound is possible. In the preparation of trisphenols, a number of products are possible, and therefore, the reaction is carried out stepwise (45).

Almost all of the alkylidenebis compounds have thiobis counterparts, i. e. compounds in which the two phenol rings are coupled by a sulfur linkage. This coupling is accomplished by the reaction of the mononuclear phenolic compound with sulfur dichloride. Catalysts have been used in this reaction (46) but are not necessary. Of greatest importance is 4,4'-thiobis (6-t-butyl-m-cresol) (XXI) (47). Others are the thiobis derivatives of 2-t-butyl-p-cresol (XXII) and 6-t-butyl-q-cresol (XXIII).

Several other phenolic antioxidants derived from tar acids have recently been introduced. All are the products of the reactions of ortho alkylated phenols. Starting with 2,6-di-t-butylphenol (XIV), oxidative coupling and reduction yields 4,4'-bis (2,6-di-t-butylphenol) (XXIV) (48). This is a biphenol in which the two phenolic rings are linked directly to each other. Two other antioxidants based on 2,6-di-t-butylphenol are the p-methoxymethyl and the p-dimethylaminomethyl derivatives. The former (XXV) is the product of the reaction of the phenol, formaldehyde and methanol (43,48,49,50). The amino (XXVI) compound results when the phenol, formaldehyde and dimethylamine are reacted in a Mannich reaction (48,51).

In summary, alkylation, especially t-butylation and styrenation of tar acids to give sterically hindered phenols is the most important chemical reaction for the preparation of antioxidants. Secondly, the joining together of two or more phenolic nuclei with each other via a phenol-aldehyde condensation, a phenol-sulfur dichloride condensation, or an oxidative coupling is of major importance. To a much lesser degree, the reaction of a phenol, an aldehyde and a third compound with a replaceably hydrogen leads to antioxidants.

When the major antioxidants are broken down according to the starting tar acids, it becomes apparent that phenol, o-cresol, m,p-cresol and 2,4-2,5-xyleneol are the acids used to make the phenolic antioxidants. Phenol yields styrenated phenols, 2,6-di-t-butylphenol and its derivatives. o-Cresol yields the o-t-butyl derivative which is then converted to the methylenebis and the thiobis compound. p-Cresol is alkylated to 2-t-butyl-p-cresol as an intermediate for the manufacture of its methylenebis and thiobis derivatives, and to BHT. The monobutyl-p-cresol and the parent p-cresol are also reacted with formaldehyde to give 2,6-bis(2'-hydroxy-3'-t-butyl-5'-methylbenzyl)-p-cresol, a trisphenol. m-Cresol is converted to its monobutyl derivative, 6-t-butyl-m-cresol, via the dibutyl derivative. The monobutyl cresol is then converted to its 4,4'-butylidenebis and its thiobis derivatives. Finally, a mixture of 2,4- and 2,5-xyleneol is butylated and the 6-t-butyl-2,4-xyleneol is isolated.







While this is a survey of tar acid-derived phenolic antioxidants, it must be remembered that there are other phenolic antioxidants, not derived from tar acids (just as there are non-phenolic antioxidants derived from tar acids). Even within the realm presented here, hundreds of structures have been prepared for antioxidant evaluation. Some of these are good antioxidants but have not been brought to commercialization for one reason or another.





REFERENCES

- (1) C. Moureau, C. Dufraisse, P. Robin and J. Pougnet, *Compt. rend.*, 170, 26 (1920)
- (2) A. Helbronner and G. Bernstein, *Compt. rend.*, 177, 204 (1923)
- (3) O. M. Smith and R. E. Wood, *Ind. Eng. Chem.*, 18, 691 (1926)
- (4) A. P. Bjerregaard, U.S. Patent 1,761,810
- (5) G. Egloff, W. F. Farager and J. C. Morrell, *Proc. Am. Petrol. Inst.*, 10th Ann. Meeting, 11, No. 1, Sect. III, 112-7, (1930)
- (6) W. O. Lundberg, "Antioxidation and Antioxidants," Interscience Publishers, New York, N.Y., 1961
- (7) K. V. Ingold, *Chem. Rev.*, 61, 563 (1961)
- (8) J. F. Hedenburg, "The Inhibition of Antioxidation by Substituted Phenols," presented before the Division of Petroleum Chemistry, Am. Chem. Soc., Atlantic City Meeting, September 9-14 (1962)
- (9) H. Morawetz, *Ind. Eng. Chem.*, 41, 1442 (1949)
- (10) R. H. Rosenwald, J. R. Hoatson and J. A. Chenicek, *Ind. Eng. Chem.*, 42, 162 (1950)
- (11) L. J. Kitchen, H. E. Albert, and G. E. P. Smith, Jr., *Ind. Eng. Chem.*, 42, 675 (1950)
- (12) E. M. Bickoff, *J. Am. Oil. Chem. Soc.*, 28, 65 (1951)
- (13) J. I. Wasson and W. M. Smith, *Ind. Eng. Chem.*, 45, 197 (1953)
- (14) A. C. Nixon, H. B. Minor, and G. M. Calhoun, *Ind. Eng. Chem.*, 48, 1874 (1956)
- (15) T. R. Lusebrink, H. B. Minor, A. C. Nixon and B. M. Steckler, Fifth World Petroleum Congress, 1959, Section VI, Paper 12.
- (16) a.) R. B. Spacht, C. W. Wadelin, W. S. Hollingshead, D. C. Wills, "Comparison of Antioxidant Activity of Various Butylated Aralkylated Cresols," presented before the Division of Rubber Chemistry, Am. Chem. Soc. Boston Meeting, April, 1962
b.) *Ind. Eng. Chem., Prdct. Res. Dev.* 1, 202 (1962)
- (17) D. R. Stevens and C. J. Livingstone, U.S. Patent 2,297,588
- (18) W. Weinrich, *Ind. Eng. Chem.*, 35, 264 (1943)
- (19) D. R. Stevens, *Ind. Eng. Chem.*, 35, 655 (1943)
- (20) H. Meyer and K. Bernhauer, *Monatsh.*, 53/54, 721 (1929)
- (21) W. S. Cook, H. E. Albert, F. L. Kilbourne and G. E. P. Smith, Jr., *Ind. Eng. Chem.*, 40, 1194 (1948)
- (22) F. S. Malette and E. Von Haam, *Arch. Ind. Hyg. Occup. Med.*, 5, 311 (1952)
- (23) A. E. Chichibabin, *Bull. Soc. Chim. Fr.* [5], 2, 497 (1935)
- (24) A. E. Chichibabin, *Compt. rend.*, 198, 1239 (1934)
- (25) French Patent 775,875
- (26) F. J. Webb, W. S. Cook, H. E. Albert and G. E. P. Smith, Jr., *Ind. Eng. Chem.*, 46, 1711 (1954)
- (27) D. R. Stevens and R. S. Bowman, U.S. Patent 2,560,666
- (28) D. R. Stevens, *J. Org. Chem.*, 15, 1172 (1950)

REFERENCES (contd.)

- (29) D. R. Stevens, *J. Org. Chem.*, 20, 1232 (1955)
- (30) D. B. Luten and A. DeBenedictis, U.S. Patent 2,435,087
- (31) H. A. Basterfield, U.S. Patent 2,497,971
- (32) M. B. Neuworth, E. B. Hotelling and E. A. Depp, U.S. Patent 2,836,627
- (33) E. P. Previc, E. P. Hotelling and M. B. Neuworth, *Ind. Eng. Chem.*, 53, 469 (1961)
- (34) G. G. Ecke and A. J. Kolka, U.S. Patent 2,831,898
- (35) A. J. Kolka, J. P. Napclitano, A. H. Filbey and G. G. Ecke, *J. Org. Chem.*, 22, 642 (1957)
- (36) R. Stroh and R. Seydel, German Patent 944,014
- (37) R. Stroh, R. Seydel and W. Halm, *Angew. Chem.*, 69, 699 (1957)
- (38) W. A. Pardee and W. Weinrich, *Ind. Eng. Chem.*, 36, 595 (1944)
- (39) G. H. Stillson and D. W. Sawyer, U.S. Patent 2,459,597
- (40) K. Hultsch, *J. prakt. Chem.*, 159, 155 (1941)
- (41) British Patent 708,640
- (42) A. H. Filbey and T. H. Coffield, U.S. Patent 2,807,653
- (43) M. S. Kharasch and B. S. Joshi, *J. Org. Chem.*, 22, 1435 (1957)
- (44) T. H. Coffield and A. H. Filbey, U.S. Patent 2,944,086
- (45) D. J. Beaver, R. S. Shumard and P. J. Stoffel, *J. Am. Chem. Soc.* 75, 5579 (1953)
- (46) D. T. Rogers and J. Feldhusen, Jr., U.S. Patent 2,398,253
- (47) D. J. Beaver, U.S. Patent 2,364,338
- (48) T. H. Coffield, A. H. Filbey, G. G. Ecke and A. J. Kolka, *J. Am. Chem. Soc.*, 79, 5019 (1957)
- (49) A. H. Filbey, U.S. Patent 2,838,571
- (50) A. H. Filbey, U.S. Patent 2,954,345
- (51) T. H. Coffield, U.S. Patent 2,962,531

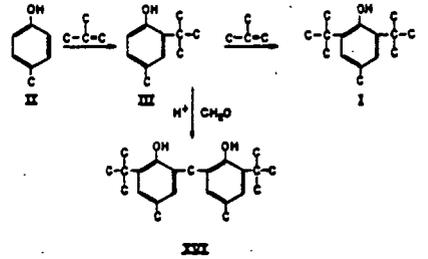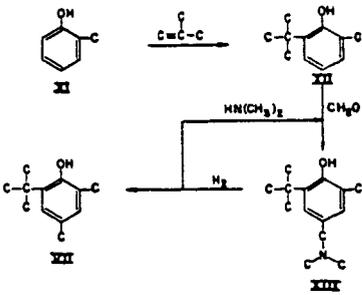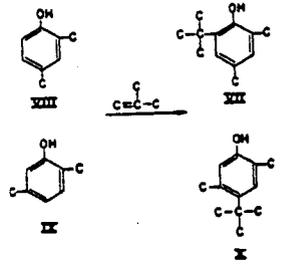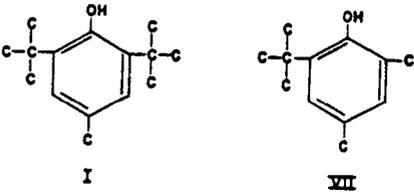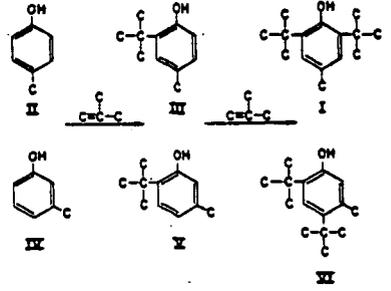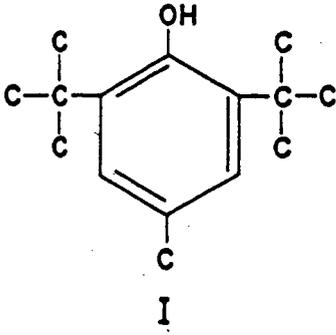

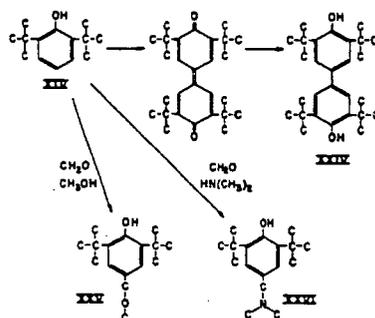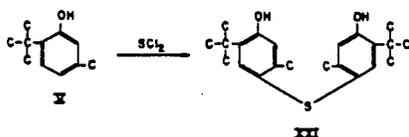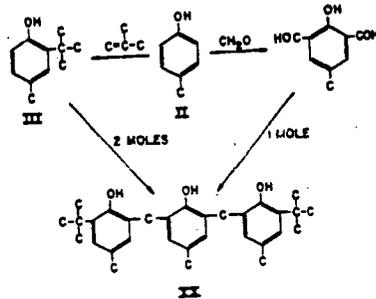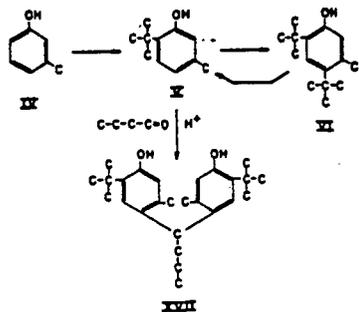

1) TAR ACID + OLEFIN $\xrightarrow{\text{H}^+}$ STERICALLY HINDERED PHENOLS.


2) a. ALKYLATED PHENOLS + ALDEHYDE $\xrightarrow{\text{H}^+}$ ALKYLIDENE BIS PHENOLS





b. ALKYLATED PHENOLS + SULFUR DICHLORIDE $\xrightarrow{\text{H}^+}$ THIOIS PHENOLS

c. ALKYLATED PHENOLS $\xrightarrow{\text{OXIDATIVE COUPLING}}$ ALKYLATED BIPHENOLS

3) a. ALKYLATED PHENOLS + ALDEHYDE + AMINE \longrightarrow AMINOMETHYLPHENOLS

b. ALKYLATED PHENOLS + ALDEHYDE + ALCOHOL \longrightarrow ALKOXYMETHYLPHENOLS

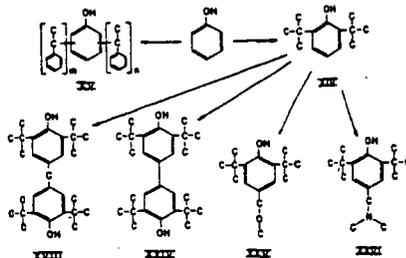

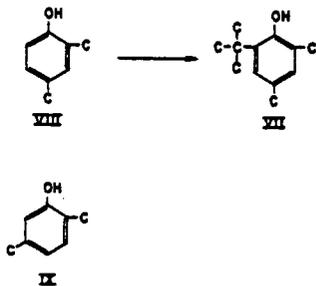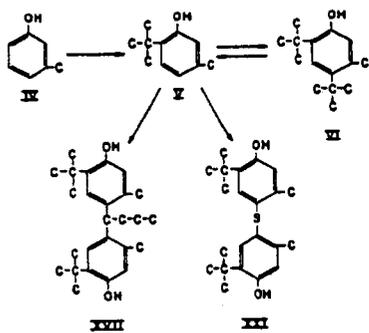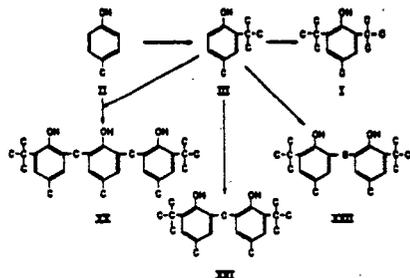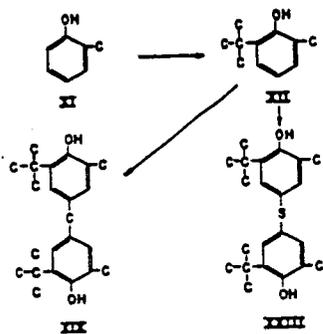

Solvent Extraction of Tar Acids From Various Sources

D. C. Jones and M. B. Neuworth

Consolidation Coal Company
Research and Development Division
Library, Pennsylvania

Solvent extraction of tar acids from tar acid containing oils is of interest because of the potential savings in investment and operating costs over the conventional batch caustic extraction process. A relatively large number of solvents have been evaluated for this purpose. For the most part, preferred solvents contain a polar oxygen group⁽¹⁾ and include water, methanol, ethanol, formic acid, acetic acid, glycerine, triethylene glycol, and diethanolamine⁽¹¹⁾. Most of the previous studies involved countercurrent extraction with a single solvent. At high tar acid recovery levels, there is a significant carryover of neutral oil, requiring secondary purification of the polar solvent extract. Fractional extraction with two solvents provides a technique for the recovery of one component of a mixture both in high yield and in high purity.

Aqueous methanol-hexane were investigated in our laboratory⁽⁶⁾ as a solvent pair, based on their high selectivity for tar acids, low cost, ease of recovery, and stability. The yield and quality of tar acids produced by solvent extraction of the three most important commercial sources, coke oven tar, petroleum derived cresylic acids, and low temperature tar will be discussed. In addition, separation of tar acid isomers and homologues by solvent extraction will be described.

Experimental

Extraction studies were carried out in a 1" x 8' extraction column of the Scheibel type. A schematic diagram of apparatus is shown in Figure 1. The solvents, aqueous methanol and hexane were stored in 5-gallon borosilicate bottles. Gravity feed was used, flow rates being measured with rotameters. The temperature of the solvents was maintained by passage through coils heated or cooled in a water bath. Tar acid oil was pumped into the extraction column by means of a precision motor driven syringes. The tar acid oil feed point was the sixth stage of the twenty-eight stage extraction column. The methanol extract was freed of solvent by distillation on a 1" x 4' Vigreux column. The residue consisted of a mixture of water and refined tar acids. The water was separated by decantation and analyzed for dissolved tar acids by butyl acetate extraction. The wet tar acids were analyzed for water, neutral oil, and pyridine bases by standard methods. In the case of the tar acids derived from petroleum, aromatic thiols and disulfides were determined⁽⁵⁾. The hexane raffinate was similarly distilled. The solvent free residue was analyzed for tar acids by a modified caustic contraction method.

The detailed procedure for laboratory scale refining of a methanol extract with anion and cation exchange resins has been described⁽⁶⁾.

Low Temperature Tar Acids

A tar acid oil (b.p. 160-230) derived from fluidized low temperature carbonization of a Pittsburgh Seam coal was refined with aqueous methanol-hexane. Previous studies⁽⁵⁾ narrowed the optimum concentration of methanol to 60 to 70%, using feed:methanol:hexane ratios of 1/1.5/3.0. The extraction conditions and results are shown in Table 1. The observed recovery of tar acids in the methanol extract was 92%. Neutral oil contamination was 0.08%, well below the acceptable level for commercial tar acids.

Tar base content was determined as 0.6%, which is 3 to 6 times higher than current specifications. This carryover of tar bases is a limitation of the solvent extraction approach to tar acid refining and is characteristic of all organic solvents considered to date. Removal of tar bases from tar acids by extraction with sulfuric acid or by distillation with sulfuric or phosphoric acids⁽¹⁾ has been proposed. An ion exchange technique, using a strong acid cation resin, for removal of tar bases from methanol extracts was developed in our laboratory and has already been described⁽²⁾.

Low temperature tar acids produced by solvent extraction or caustic extraction are contaminated with small quantities of aliphatic acid, ranging from acetic through butyric acid. These aliphatic acids are concentrated in the phenol fraction and impart a foul odor. Purification of the methanol extract with an anion exchange resin and a cation exchange resin in series^(2,7), results in the recovery of tar acids of satisfactory quality with respect to neutral oil, aliphatic acids, and pyridine bases.

A schematic flow diagram and the chemical reactions involved in this ion exchange purification are shown in Figure 2. The methanol extract is pumped over an anion exchange resin. The quaternary ammonium hydroxide groups combine with tar acids to form phenolate salts. The aliphatic acids by virtue of their higher acidity gradually displace the phenols until the resin is saturated with aliphatic acids. Breakthrough of aliphatic acids follows and regeneration is required. The methanol extract then contacts a cation resin where pyridine bases are removed as pyridinium sulfonates. The purified methanol extract is treated as before for the removal of methanol and water. The analysis of the fully refined tar acids is presented in Figure 2. The neutral oil and tar bases values of 0.08% and 0.05%, respectively, are well within commercial specifications. Aliphatic acids could not be detected by analysis or by odor.

Coke Oven Tar Acids

Solvent extraction of tar acids from coke oven tar presents a number of unique problems. A narrow boiling tar acid oil contains sufficient naphthalene to raise its freezing point well above ambient temperature, which necessitates diluting the tar acid oil with one of the solvents or extracting above ambient temperature. The concentration of tar acids is about 1/3 the concentration of the corresponding fraction from low temperature tar, and the ratio of tar bases is quite high, 0.11 as compared to 0.013 for low temperature tar acid oil. The low concentration of tar acids imposes an economic penalty, since throughputs and solvent ratios are proportional to the tar acid oil volume rather than absolute tar acid concentrations. The relatively high concentration of tar bases will result in a correspondingly large contamination of the recovered tar acids, since most

oxygenated solvents will extract pyridine bases. The detailed solvent extraction conditions and extraction results are shown in Table 2. A 90% recovery of tar acids was obtained. The neutral oil content of the recovered tar acids was well under 0.1%, which meets current specifications. The tar base contamination was 4.1% as compared to published specifications of 0.1 to 0.2%. Ion exchange purification would reduce the tar bases to an acceptable level. However, the costs for such a secondary purification would be quite high because the consumption of ion exchange regenerant is proportional to tar base concentration. The added refining costs might be justified if by-product credit could be taken for the tar bases, which can be recovered from the resin, free of tar acids and neutral oils.

Petroleum Cresylics

Crude tar acids produced by the caustic washing of gasoline have become an important source of refined cresylic acids in the U. S. Normally, these are available as caustic solutions containing 10 to 50% tar acids and from 1 to 20% aromatic mercaptans and disulfides. The conventional method of separating the sulfur compounds from tar acids is oxidation of the sulfur compounds to disulfides and separation of the caustic insoluble disulfides. While a significant purification can be effected, sufficient disulfides remain dissolved in the alkaline solution to be objectional, and there is a loss of tar acids during the oxidation step.

(a) Fractional extraction of a feed of this type with aqueous methanol-hexane under optimum conditions results in a recovery of 95% of the tar acids and simultaneous elimination of 99.5+% of the mercaptans and disulfides in the feed. The effectiveness of this separation is quite unexpected when one considers phenol and thiophenol as prototypes of the mixture. Although thiophenol is almost a thousand times stronger an acid than phenol, thiophenol is rejected by aqueous methanol, the more polar solvent. The distribution behavior of thiophenols can be explained as a result of their inability to hydrogen bond with oxygenated solvents.

The details of an actual laboratory extraction of a crude tar acid mixture from petroleum is shown in Table 3. Using a tar acid/60% methanol/hexane volume ratio of 1.0/2/4.5, the recovery of tar acids in the extract was 97% and the sulfur compound contamination was 0.012%. Neutral oil contamination is 0.05%. Tar acids derived from catalytic cracking of gas oils contain very low concentrations of pyridine bases because chemical combination of basic compounds with the acidic cracking catalyst occurs during cracking. Maximum pyridine contamination is about 0.05%, which is acceptable.

Pitt-Consol Chemical Company, a subsidiary of Consolidation Coal Company, has operated a commercial extraction unit for the refining of petroleum derived tar acids for 6 years. Composite crude tar acids from at least 35 petroleum refineries are being processed. The performance of the commercial extraction column duplicates our laboratory unit in terms of yield and purity of refined tar acids.

Miscellaneous Refining Applications

Separation of Monohydric - Dihydric Phenol Mixtures

Tar acids boiling above 230°C from low temperature tar contain dihydric phenols, which turn pink when alkaline solutions of the tar acids are oxidized.

This discoloration is objectionable when disinfectant applications are contemplated. Removal of the pinking components has been effected by air-blowing alkaline solutions or extraction with borax, requiring consumption of chemicals and loss of some tar acids due to oxidation.

Fractional solvent extraction of the high boiling tar acids (230-350°C) produced from low temperature tar with more dilute methanol-hexane⁽¹⁰⁾, will separate the dihydric phenols. The results are summarized in Table 4. Using 30% methanol, 11% of the feed is recovered as a methanol extract, the raffinate boiling up to 260°C containing no dihydrics. An increase in the methanol concentration to 35% removed more of the dihydrics, the tar acids boiling up to 280° being free of pinking. When the methanol concentration was increased to 40%, a hexane raffinate of 79% was obtained, which showed no dihydrics in the tar acids boiling up to 300°C. Extraction of a synthetic mixture containing 50% catechol with 35% aqueous methanol-hexane produced a hexane raffinate, containing 76% of the monohydric phenols completely free of catechol. This method has the advantage of complete recovery of tar acids in two fractions, one of which contains no dihydric phenols.

Separation of 2,6-Xylenol From Mixed Cresols

An interesting application of aqueous methanol-hexane extraction is the separation of 2,6-xylenol from mixed cresols. 2,6-Xylenol occurs in low concentrations in the cresol fraction and is very difficult to recover in high purity because it boils quite closely to both o-cresol and m,p-cresol.

Fractional extraction of a mixture corresponding in composition to a fraction boiling between o-cresol and m,p-cresol was tried, using dilute methanol-hexane⁽⁹⁾. The results are presented in Table 5. When 45% methanol was tried, 2,6-xylenol was recovered in 63% yield and 67% purity. Dilution of the methanol to 35% resulted in increased selectivity, and 2,6-xylenol was recovered in 91% purity and 54% yield. It would require several precision distillations to accomplish the same result. Apparently, aqueous methanol, when sufficiently diluted, can separate tar acids on the basis of both acidity and molecular weight.

REFERENCES

- (1) Dierichs, A. and Kubicka, R., Phenols and Bases, p. 253 Akademie-Verlag, Berlin, 1958.
- (2) Depp, Elizabeth, A. and Neuworth, M. B., Ind. and Eng. Chem. 49, 182 (1957).
- (3) Gorin, E. and Neuworth, M. B., U. S. 2,666,796 (January 19, 1954).
- (4) Gorin, E. and Others, U. S. 2,789,144 (April 16, 1957).
- (5) Jones, D. C., Kohlbeck, J. A. and Neuworth, M. B., Ind. and Eng. Chem., in press.
- (6) Neuworth, M. B., Hoffman, Vera and Kelly, T. E., Ind. and Eng. Chem. 43, 1689 (1951).
- (7) Neuworth, M. B., U. S. 2,734,925 (February 14, 1956).
- (8) Neuworth, M. B., U. S. 2,767,220 (October 16, 1956).
- (9) Neuworth, M. B., U. S. 2,789,146 (April 16, 1957).
- (10) Neuworth, M. B., U. S. 2,806,386 (September 17, 1957).
- (11) Stuckey, J. M., Bureau of Mines Report of Investigation, 5705 (1961).

Table 1

Solvent Extraction of Low Temperature Tar Acid OilFeed Composition (B.P. 150-230°C)

	<u>Wt. %</u>
Tar Acids	44.5
Neutral Oil	54.8
Tar Bases	0.6
Aliphatic Acids	0.2

Extraction Conditions

	<u>Vol. Ratio</u>
Tar Acid Oil	1.0
60% Methanol	1.5
Hexane	3.0

Composition and Yield of Methanol Extract

Yield of Tar Acids	92	Wt. %
		<u>Purity (Wt. %)</u>
Neutral Oil		0.08
Tar Bases (Pyridine)		0.58
Aliphatic Acids (Butyric Acid)		0.36

Table 2

Solvent Extraction of Coke Oven Tar Acid OilFeed Composition (170-230°C)

	<u>Wt. %</u>
Tar Acids	14.3
Naphthalene	60.1
Neutral Oil	24.0
Tar Bases	1.6

Extraction Conditions

	<u>Vol. Ratio</u>
Tar Acid Oil	1.0*
70% Methanol	1.0
Heptane	3.0**

Purity of Tar Acids

	<u>Wt. %</u>
Neutral Oils	< 0.1
Tar Bases	4.1

*Fed as a 1:1 solution in heptane.

**Includes heptane used to dilute tar acid oil.

Solvent Extraction of Petroleum Cresylic AcidsFeed Composition (160-240°C)

	<u>Wt. %</u>
Tar Acids	82.2
Mercaptans) Thiocresols	16.3
Disulfides)	
Neutral Oils	1.5

Extraction Conditions

	<u>Vol. Ratio</u>
Tar Acid Oil	1.0
60% Methanol	2.0
Hexane	4.5

Purity of Tar Acids

	<u>Wt. %</u>
Neutral Oils	0.05
Tar Bases (Pyridine)	0.05
Mercaptans) (Thiocresols)	0.012
Disulfides)	

Table 4

Removal of Dihydric Phenols From High Boiling Tar Acids
230-350°CExtraction Conditions


Exp. No.	<u>1</u>	<u>2</u>	<u>3</u>
	Feed Rates (ml/min.)		
Tar Acids	4.5	4.5	4.5
Aqueous Methanol	12.0 (30%)	12.0 (35%)	18.0 (40%)
Hexane	10.5	10.5	10.5
<u>Yields (Wt. % Tar Acid Feed)</u>			
Methanol Extract	11	12	21
Hexane Raffinate	89	88	79

Table 5
Separation of 2,6-Xylenol From Mixed Cresols

	<u>Extraction Conditions</u>	
	<u>Vol. Ratio</u>	
Tar Acids	1	1
Aqueous Methanol	5 (45%)	10 (35%)
Hexane	10	5
Feed Composition		
o-Cresol	43.0	42.2
m-Cresol)	40.0	42.5
p-Cresol)		
2,6-Xylenol	17.0	15.3
Naphtha Raffinate Yield,		
(Wt.% Feed)	16.1	9.1
Composition, Wt.%*		
2,6-Xylenol	67.3	91.2
o-Cresol	19.1	8.8
m,p-Cresol	13.6	-


*Based on IR analysis.

FRACTIONAL SOLVENT
EXTRACTION APPARATUS

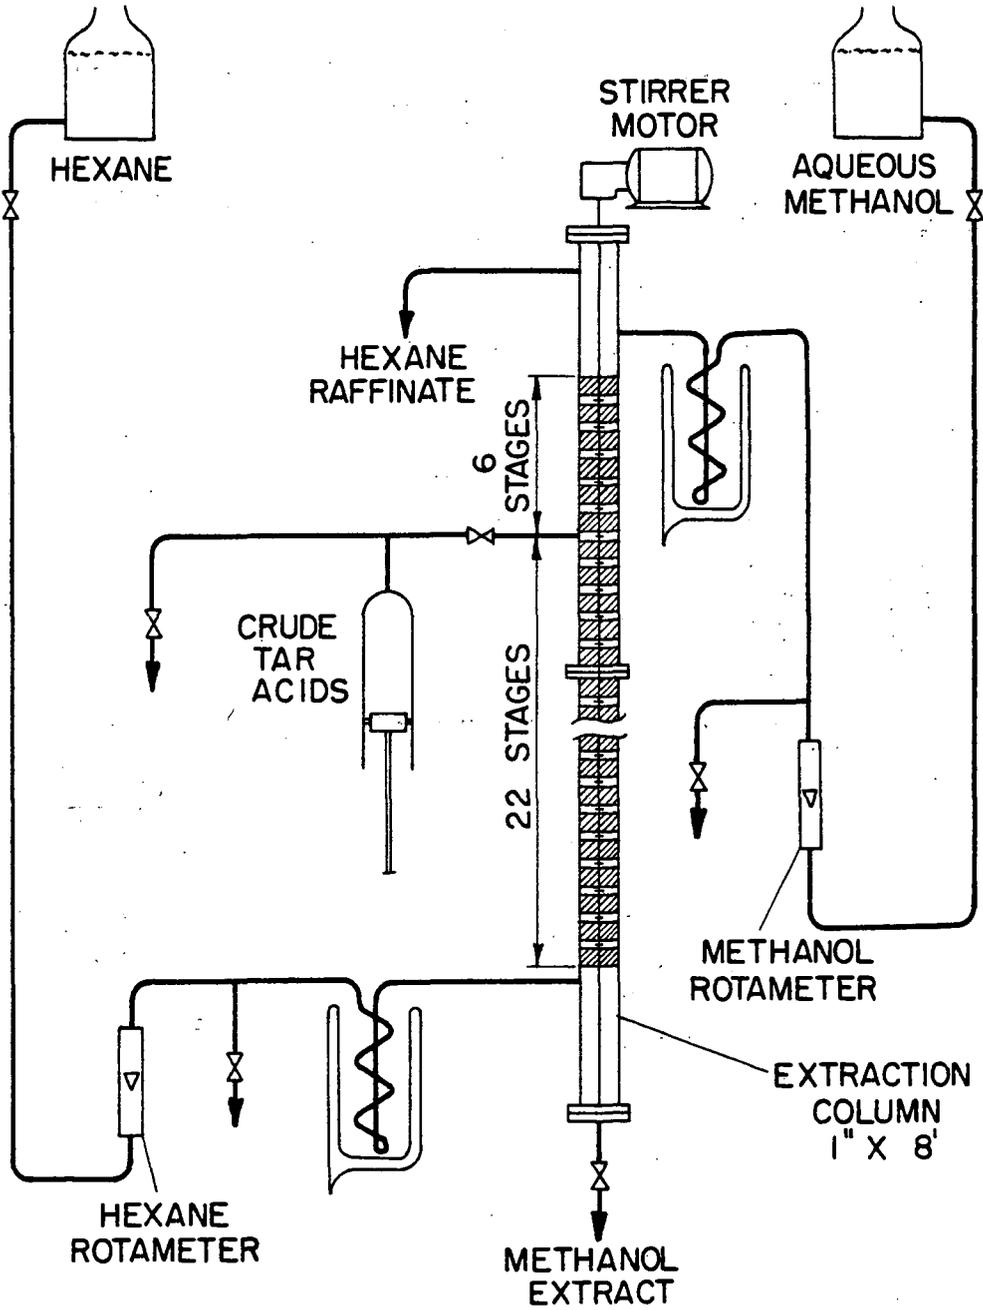


REMOVAL OF TAR BASES & ALIPHATIC ACIDS BY ION EXCHANGE REFINING

FIGURE 2

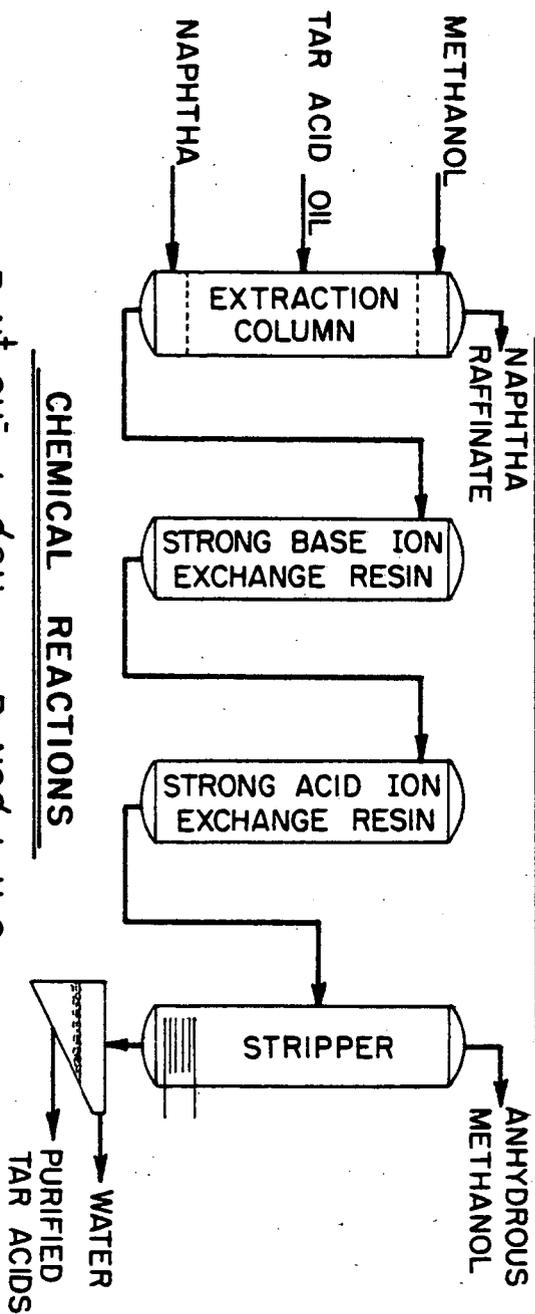

CHEMICAL REACTIONS

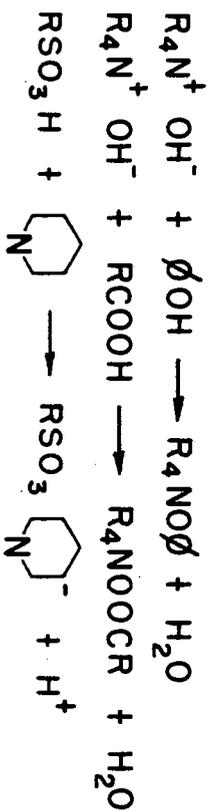

PURITY OF TAR ACIDS (Wt. %)

NEUTRAL OILS	0.08
TAR BASES (PYRIDINE)	0.05
ALIPHATIC ACIDS	Nil

Utilization of Coal Tar Bases

Francis E. Cislak

Reilly Tar & Chemical Corporation, Indianapolis, Indiana

The carbonization of coal gives rise to a complex mixture of hundreds of chemical compounds. Most of these compounds fall into one of three groups: hydrocarbons, acids, and bases. The coal tar bases are nitrogen compounds. The nitrogen atom is in the ring, as in pyridine, or it is attached to the ring as in aniline. Of the large number of compounds that are included in the category of coal tar bases, only pyridine and its simpler homologs are considered in this presentation.

Narrating the actual uses to which pyridines are put would be one way of discussing the utilization of coal tar bases. Perhaps a more stimulating approach is the one adopted herein, that is, a presentation of an outline of some chemical reactions of pyridines which are involved in their utilization.

Quaternization. Pyridine and the alkylpyridines react with alkyl halides, acid chlorides, and with alkyl or aryl sulfonic esters to form pyridinium salts. The rate of quaternization is influenced by the nature and position of the substituents on the pyridine ring. Methyl groups adjacent to the nitrogen decrease the rate of quaternization (127). The tendency to quaternize decreases in the order 4-picoline > 2-picoline > 2,4-lutidine > 2,6-lutidine. A method of purifying 2,6-lutidine from such contaminants as 3-picoline and 4-picoline, is based on the fact that 2,6-lutidine quaternizes much more slowly than do the picolines. The presence of a carboxyl group on the pyridine ring greatly retards the rate of quaternization. On the other hand, the esters of pyridine carboxylic acids are quaternized rather smoothly (118).

Pyridyl-pyridinium salts wherein the nitrogen atom of a pyridine nucleus is connected to a carbon atom at the 2-, 3-, or 4- position of a second pyridine molecule are known. N-pyridyl-4-pyridinium dichloride, made by the reaction of thionyl chloride upon pyridine (87) (21)(11), had been utilized in the preparation of 4- substituted pyridines (75). The recent contributions to the chemistry of pyridine-N-oxide have made N-pyridyl-4-pyridinium dichloride of less importance in the preparative methods (30).

2-Vinylpyridine reacts with pyridine hydrochloride to give an almost quantitative yield of 2-pyridylethylpyridinium chloride. The reaction is a general one, similar quaternary compounds are formed with pyridine thiocyanate, with quinoline hydrochloride, etc. 4-Vinylpyridine reacts in like manner (35).

Quaternary salts of pyridine, of alkylpyridines, as well as of other pyridine compounds may be oxidized by potassium ferricyanide to 1- substituted 2-pyridones (123). The nature of the substituent in the 3- position of a pyridinium salt determines whether ferricyanide oxidation gives a 2-pyridone or a 6-pyridone. If the 3- position is occupied by phenyl, 3-pyridyl, carboxy, or carboxy ethyl, 6-pyridones are formed. If the substituent is bromine, methyl, or ethyl, the oxidation occurs mainly at the 2- position. 3-Cyanopyridine methyl

iodide appeared to form both 2-, and 6-pyridones (22)(141). A more recent study of the ferricyanide oxidation of the quaternary of 1-phenylethyl-3-cyanopyridine does not confirm the presence of a 6-pyridone (144).

Methyl iodides of isonicotinic acid esters are oxidized with alkaline potassium ferricyanide to 4-carboxy-N-methyl-2-pyridone in yields up to 96% (55).

5-Alkyl-2-picolinium salts upon oxidation with iodine and pyridine and subsequently treating the resulting compound with dilute caustic give 1-substituted 5-alkyl-2-pyridones (14).

The pyridine-N-oxides also form quaternary compounds (82)(49). These compounds are important in the preparation of 2- and 4-substituted pyridines.

Oxidation. The inertness of pyridine towards oxidizing agents is one of its outstanding characteristics. Pyridine is not attacked by fuming nitric acid nor by chromic acid, and even potassium permanganate has but little effect on it.

In spite of its resistance to oxidation, pyridine may be oxidized quite readily to pyridine-N-oxide. The reaction is usually carried out with a mixture of hydrogen peroxide and acetic acid (67)(113)(115). The formation of the N-oxide linkage is a fairly general behavior of compounds containing the pyridine nucleus. Alkylpyridines form pyridine-N-oxides; so do alkanolpyridines (31)(17); and acetylpyridines (82)(129). Nicotinic acid, isonicotinic acid, and picolinic acids give the corresponding N-oxides (43)(59)(10), and so do their esters (82)(18), but 2,5-pyridine dicarboxylic acid is not oxidized to the N-oxide while its dimethyl ester is (118). The pyridine carboxamides also form N-oxides in the usual manner (57).

2-Bromopyridine-N-oxide and 2-bromo-6-methylpyridine-N-oxide are formed in good yields (3), and so are 3-bromopyridine-N-oxide and 3,5-dibromopyridine-N-oxide (57). 2-, 3-, and 4-pyridine sulfonic acids are resistant to oxidation by hydrogen peroxide and acetic acid. However, the sodium salts are readily converted to the corresponding N-oxides (47).

In contrast to the stability of pyridine, the alkylpyridines are attacked by a variety of oxidizing agents. The oxidation of the picolines, especially of the 3- and 4-isomers, to the corresponding pyridine carboxylic acids is one of their commercially more important reactions.

Potassium permanganate is used to convert the picolines to pyridine carboxylic acids (15)(98)(139). It is also useful in preparing 2-aminopyridine carboxylic acids from 2-aminopicoline (53) and 4-aminonicotinic acid from 4-amino-3-picoline (142). Potassium permanganate may be used to oxidize selectively a pyridine compound having more than one oxidizable group. An alkyl group in the 3-position is more readily oxidized than is one in the 4-position. 3,4,5-Trimethylpyridine oxidized with a 2% aqueous $KMnO_4$ gives 4,5-dimethylnicotinic acid and 4-methylnicotinic acid. 3,5-Dimethyl-4-butylpyridine forms 4-butyl-5-methylnicotinic acid and 4-butyl dinicotinic acid (148).

4-Methyl picolinic acid can be made from 2-styryl-4-methylpyridine by $KMnO_4$ oxidation at 0° to 5° C. (42); 4,5-diethyl picolinic acid from 2-styryl-4,5-diethylpyridine (91); 4-isopropyl-5-ethyl picolinic acid from 2-styryl-4-isopropyl-5-ethylpyridine (122). Treatment of 2-styrylpyridine at 200° C. with selenium dioxide gives 1-phenyl-2-(2-pyridyl)-1,2-ethane dione (24).

Nitric acid is an important commercial oxidizing acid. The picolines resist oxidation by nitric acid. Even at its boiling point nitric acid does not oxidize 3-picoline (121). Nitric acid at a temperature of about 230° C. and about 35 atms pressure oxidizes 3-

picoline to nicotinic acid (50% yield) and 4-picoline to isonicotinic acid (90% yield)(13).

A mixture of nitric acid and sulfuric acid or phosphoric acid gives good yields of pyridine carboxylic acids from picolines. The reaction proceeds at atmospheric pressures (39).

Sulfuric acid, with selenium as a catalyst, may also be used to oxidize picolines to pyridine carboxylic acids (155). The oxidation of 2,4-lutidine with sulfuric acid plus selenium gives 29% of 2,4-pyridine dicarboxylic acid and 18% of 2-methylisonicotinic acid (116).

Pyridine carboxylic acids can be produced by the catalytic vapor phase air oxidation of picolines (37). The position of the methyl group determines the ease of oxidation; the methyl group in the 3-position is the most resistant to oxidation (36).

Vapor phase oxidation of picolines with air in the presence of ammonia or an amine yields cyanopyridines. This method of making cyanopyridines was first observed in the vapor phase oxidation of nicotine wherein 3-cyanopyridine was made (38). 3-Picoline is converted to 3-cyanopyridine by oxidation with sulfur in the presence of ammonia (143).

Recent studies on the oxidation of picolines with selenium dioxide show the ease of oxidation to be 4-picoline > 2-picoline > 3-picoline. In fact, 3-picoline is not affected by SeO_2 and hence is used as a solvent for carrying out the oxidation of the other picolines. 2,5-Lutidine gives 79% of 3-methyl picolinic acid. 2,4-Lutidine gives a mixture of 2-methyl isonicotinic acid (44%) and 2,4-pyridine dicarboxylic acid (76).

Picolinic acid has been prepared by the liquid phase oxidation of 2-picoline with gaseous oxygen in the presence of a copper salt of a fatty acid (65); similarly isocinchomeric acid was made from aldehyde collidine and isonicotinic acid from 4-picoline (134).

3-Picoline has been oxidized electrolytically to nicotinic acid (89).

Alkylpyridines may be oxidized to the corresponding aldehydes by vapor phase oxidation in the presence of a large excess of water vapor. 2-Picoline gives 2-pyridine aldehyde (106); 2,6-lutidine may give 6-methyl-2-pyridine aldehyde, 2,6-pyridine dialdehyde (107) and 6-carboxy-2-pyridine aldehyde (103); 3,5-lutidine forms 5-methyl-3-pyridine aldehyde (105).

It has been reported that 2-picoline may be oxidized to 2-pyridine aldehyde by means of selenium dioxide (99)(66)(20).

Useful laboratory methods for the preparation of pyridine aldehyde involve the oxidation of pyridyl carbinols with manganese dioxide (64), selenium dioxide (77), or lead tetracetate (111). 2,6-bis-Hydroxymethylpyridine is oxidized by SeO_2 to 2-hydroxymethyl-6-pyridine aldehyde (104). The 3-pyridylaldehyde has been prepared by vapor phase oxidation of 3-pyridyl carbinol (69).

3-Pyridine aldehyde, 4-pyridine aldehyde, and 6-methyl-3-pyridine aldehyde were prepared in good yield by reducing 3-cyanopyridine, 4-cyanopyridine, and 6-methyl-3-cyanopyridine with semi-carbazide hydrochloride and Raney Nickel, and liberating the aldehyde from the resulting aldehyde semicarbazone by acid hydrolysis in the presence of meta nitrobenzaldehyde (50). 3-Pyridine aldehyde in 83% yield has also been made by the reduction of 3-cyanopyridine with $\text{NaHA}(\text{OEt})_3$ (73).

Isonicotinaldehyde has been made by the ozonization of 4-styrylpyridine (152); 2-pyridine aldehyde by the ozonization of 2-vinylpyridine (25).

Hydrogenation. In contrast to its inertness towards oxidation, pyridine is rather easily hydrogenated. The complete reduction of

pyridine to piperidine, i.e. its hexahydro derivative, is a commercial operation of many years standing.

Various catalysts are useful in reducing pyridine with hydrogen. Nickel catalysts, especially Raney Nickel, are suitable for the formation of piperidine (5). To avoid hydrogenolysis with the formation of high-boiling by-products, the temperature is kept as low as possible (78). The alkylpyridines are readily reduced by hydrogen (Raney Nickel catalyst) to the corresponding alkylhexahydropyridines (5)(130)(80).

Platinum oxide is a useful catalyst for the laboratory hydrogenation of pyridines. Pyridine poisons platinum oxide catalyst. However, the hydrogenation of pyridine hydrochloride, or of quaternary salts of pyridine proceeds very well (61). The slow rate of hydrogenation of the base itself may be due to the free electrons on the nitrogen. Through these electrons the pyridine forms a compound with the catalyst thereby withdrawing the platinum from its role of a catalyst. In the quaternary salts, the pyridine electrons are tied up, thereby permitting the hydrogenation to proceed many times faster than if free pyridine were used (108). The pyridine when dissolved in acetic acid can be hydrogenated with platinum oxide (54).

Piperidine manufactured by the electrolytic reduction of pyridine contains substantial quantities of tetrahydropyridine; the piperidine produced by hydrogenation over Raney Nickel contains no appreciable amount of the 1,2,5,6-tetrahydropyridine (45). Electrolytic reduction of 2-methylpyridine gives 2-methylpiperidine and 24.4% of 2-methyl-1,2,3,6-tetrahydropyridine; 3-methylpyridine gives 3-methyl-1,2,5,6-tetrahydropyridine in addition to 3-methylpiperidine; and 4-methylpyridine gives 4-methylpiperidine and 4-methyl-1,2,3,6-tetrahydropyridine (51). The electrolytic reduction of quaternary pyridinium salts gives the same types of products so far as the position of the double bond is concerned (52).

In the laboratory, sodium and absolute alcohol are frequently used to reduce pyridine to piperidine (102). This reaction was discussed in 1884 by Ladenburg (90). It is important that the alcohol be dry. If 95% ethanol is used, little or no piperidine is produced but instead the pyridine ring is ruptured and ammonia evolved (136) (137). Reducing 3-methylpyridine with sodium and absolute butanol gives in addition to 3-methylpiperidine, 28.4% of 3-methyl-1,2,5,6-tetrahydropyridine; 4-methylpyridines gives 45% of 4-methyl-1,2,3,6-tetrahydropyridine in addition to 4-methylpiperidine (51). A number of 4-alkylpiperidines were prepared from 4-alkylpyridines by reduction with sodium and butanol followed by hydrogenation with hydrogen in the presence of palladium. The sodium-butanol reduction gave mainly the tetrahydropyridine which was converted to the piperidine by hydrogen (149).

Reduction of pyridine with LiAlH_4 gives 1,2-dihydropyridine (19). LiAlH_4 reduction of quaternary salts of alkylpyridines gives only the tetrahydropyridines (51).

Pyridine carboxylic acid esters are reduced, in good yield, by LiAlH_4 to the corresponding hydroxymethylpyridines (79)(112)(81); but their quaternaries with LiAlH_4 give 1-alkylhydroxymethyl-tetrahydropyridines (51).

Catalytic hydrogenation (Ni catalyst) of pyridine in various aliphatic alcohols (1 to 16 carbon atoms) gives the corresponding 1-alkylpiperidine in yields in excess of 70% (133).

Amination. Because of the difficulty of nitrating pyridine, the usual methods for the synthesis of aromatic amines are not available for the preparation of aminopyridines. The nitration of pyridine proceeds only under drastic conditions, fuming sulfuric acid and potassium nitrate plus a temperature in excess of 300°C .; the nitro group enters

the 3- position; the yield is only 15% (84). When especially high temperatures are used, the nitro group occupies the 2- position (46). Poly-alkylpyridines are somewhat easier to nitrate, the reaction conditions are milder, and the yields are better (120).

While pyridine is difficult to nitrate, pyridine-N-oxide is readily nitrated; the nitro group enters the 4- position (115). The nitration can be carried out at water-bath temperatures with a mixture of nitric and sulfuric acids; the yield is above 80% (83). The ease of nitration extends to the alkylpyridine-N-oxides and to various derivatives of pyridine-N-oxide.

The 4-nitropyridine-N-oxides are readily reduced and deoxygenated to the corresponding 4-aminopyridines. Various reducing agents have been used, e.g. iron and acetic acid (115), hydrogen with Raney Nickel (41)(63), hydrogen with palladium in acetic anhydride (48). 4-Nitropyridine-N-oxides offer a good route to 4-aminopyridines.

Prior to the 4-nitropyridine-N-oxide approach to the synthesis of 4-aminopyridine, it was prepared by the Hofmann degradation of isonicotinamide (93)(114) or from 4-pyridyl pyridinium dichloride and ammonium hydroxide (87)(6). The latter method has also been used for making 4-amino-3-methylpyridine (44).

The most convenient method for preparing 3-aminopyridine is from nicotinamide (7); it may also be prepared from 3-bromopyridine and aqueous ammonia in the presence of copper sulfate (97).

In 1914 the Russian chemist, Chichibabin, discovered a most interesting and useful reaction for introducing an amino group onto the 2- position of the pyridine nucleus. He found that pyridine reacts with sodamide to form 2-aminopyridine (92). The amino group goes almost exclusively into the 2- position, only a trace of 4-aminopyridine is formed; no 3-aminopyridine is found.

2-Aminopicolines may be prepared by reacting the picolines with sodamide (135). In the case of 3-picoline, the two carbon atoms adjacent to the nitrogen are different because of their relation to the 3-methyl group. Sodamide gives two aminopicolines when it is reacted with 3-picoline, that is, 2-amino-3-picoline and 6-amino-3-picoline; the former predominates (34).

Pyridine and 2-picoline have been aminated in the alpha position with alkylamines by refluxing the pyridine with a slight excess of the alkylamine and a stoichiometric amount of sodium (88).

Alkylation. There are several interesting reactions available for the alkylation of the pyridine ring. Arens and Wibaut found that an alkyl group may be introduced onto the 4- position of pyridine by the action of zinc dust on a mixture of pyridine, an organic acid anhydride and the corresponding organic acid (9)(56). This reaction is not applicable to alpha substituted pyridines; it cannot be used to introduce an alkyl group onto the 4- position of 2-picoline, 2-aminopyridine, picolinic acid, nor of 2-chloropyridine (153). The reaction proceeds in a "normal" manner with 3-picoline (140). Iron powder may be used in place of zinc dust (154).

At the Reilly Laboratories we found that pyridine as well as alkylpyridines may be alkylated by the use of aliphatic acid salts of tetravalent lead (128). By this means alkyl groups containing one less carbon atom than the acid radical of the lead salt are produced; the alkyl group enters both the 2- and the 4- positions if they are open. The reaction of 3-butylpyridine with lead tetra-acetate gives a mixture of 3-butyl-2-methylpyridine (15%), 5-butyl-2-methylpyridine (5%), 3-butyl-2,6-dimethylpyridine (1.5%), and 3-butyl-4-methylpyridine (5%) (62).

Lithium alkyls and phenyl lithium are used to introduce an alkyl or phenyl group onto the 2- position of pyridine (156), of 3-picoline

(1), of 3-aminopyridine and 3-methoxypyridine (2).

In 1936 Chichibabin described the alkylation of 2-picoline and of 4-picoline by reacting the picolines with sodamide to form picolyl-sodium and reacting the latter compound with an alkyl halide (29). The activity of the hydrogen atoms in the methyl groups of 2- and 4-picoline is ascribed to the ability of these picolines to take part in resonance with the azomethine linkage of the pyridine ring. Since 3-picoline cannot participate in such resonance, it was long believed that 3-picoline could not be alkylated by the Chichibabin method. In 1951 Brown and Murphey (23) showed that 3-picoline may be alkylated by the sodamide method.

The Chichibabin method of alkylating picolines is of general applicability, both the lower alkyl halides as well as long chained ones may be used (86). Substituted picolines may be alkylated (101)(8)(132)(26).

2,4,6-Collidine presents an opportunity of attaching an alkyl group on either of the alpha methyl groups or onto the methyl group in the 4-position. We found that the sodamide method introduces the alkyl onto the 4-methyl group (33). 2,4-Lutidine is also alkylated at the 4-position (95).

Ziegler and Zeiser (156) showed that phenyl-lithium reacts with 2-picoline to form 2-picolyl-lithium which may be reacted with alkyl-halides to attach an alkyl group onto the 2-methyl group. This reaction has been applied to the preparation of a number of 2-picolyl compounds. With 2-bromopyridine there is formed 2,2'-dipyridylmethane (117). With chloroacetylenes, 2-pyridylacetylenes are prepared (58). 1-(2-Pyridyl)-4-chloro-3-pentene was made from 1,3-dichloro-3-butene (72). 2-Pyridylmalondinitrile was made from N-methyl-N-cyanoaniline (94).

In contrast to the ease of introducing groups onto the 4-methyl group through the intervention of sodamide, attempts to use the lithium method have not been too satisfactory (117). The usual manner of making 2-picolyl-lithium is to prepare a solution of phenyl lithium and then add 2-picoline to this solution. In the alkylation of 4-picoline, better results are obtained when the phenyl-lithium is added very slowly to the 4-picoline (151).

Alkylation of 2,4,6-collidine by the sodamide process proceeds mainly at the 4-position. Alkylation by the lithium method gives mainly 2,6-dialkyl-4-methylpyridine and a lesser amount of 2,4,6-trialkylpyridine (74).

Alkali metals are used as catalysts in the alkylation of 2-picoline and 4-picoline with compounds containing an ethylenic double bond. A mixture of 2-picoline, sodium, and ethylene under 60 atms. pressure heated to 120-130° gives a mixture of 2-propylpyridine (23%) and 2-(3-pentyl)pyridine (126)(119). Under similar conditions 2-picoline and butadiene give 2-(3-pentenyl)pyridine and 2-(5-nondienyl-2,7)pyridine; styrene and 2-picoline give 1-phenyl-3-(2-pyridyl)propane (150). Acrylonitrile reacts with 2- and 4-picolines in the presence of a bit of sodium to give pyridyl-butyronitriles and dicyanopyridyl pentanes (32)(26).

Picolines with methyl groups in the 2- or 4-position may be alkylated in the vapor phase by reaction with aliphatic aldehydes (40).

Condensation. The reaction of picolines with aldehydes may be considered a classic in the pyridine series. The methyl groups in the 2- and the 4-position are reactive, whereas a methyl group in the 3-position is not.

2-Picoline condenses with formaldehyde to give 2-ethanolpyridine (85); 4-picoline gives 4-ethanolpyridine (124).

2,4,6-Collidine presents a situation wherein the formaldehyde

must decide whether it will react with the methyl group in the 4-position or with one of the alpha methyl groups. In the presence of a large excess of 2,4,6-collidine, the formaldehyde condenses almost exclusively with a methyl group in the 2-position; only a trace of the 4-ethanolpyridine is formed (109). In the presence of a large excess of formaldehyde, the 4-methyl group as well as both alpha methyl groups react (96)(16). 2,4-Lutidine also reacts with formaldehyde, preferentially at the 2-position (110)(42).

4-Ethylpyridine has been condensed with formaldehyde (excess) to give a mixture of dimethylol-4-ethylpyridine (65.5%) and of monomethylol-4-ethylpyridine (26.6%)(131).

The introduction of the -N-oxide group enhances the activity of picolines towards condensation reactions. Neither 2- nor 4-picoline will condense with ethyl oxalate, but their -N-oxides readily condense with ethyl oxalate to give the corresponding pyruvates (4).

Studies in our laboratory show that the presence of a chlorine in the 2-position of 4-picoline retards the condensation activity of the methyl group. 4-Bromo-2-picoline reacted with formaldehyde to give only a 9% yield of the corresponding ethanolpyridine (25).

To improve the yield of 2-(2-hydroxyethyl)-3-picoline, the 2-lithio derivative of 2,3-lutidine was reacted with paraformaldehyde. 2-Picolyl-lithium reacts smoothly to give 2-ethanolpyridine (54). 2,6-Lutidine through its 2-lithio derivative has been condensed with propionaldehyde to give a good yield of 2-(2-hydroxybutyl)-6-methylpyridine (68).

2-Picoline and 4-picoline readily condense with benzaldehyde and with substituted benzaldehydes. With benzaldehyde, it is difficult to stop the reaction at the ethanol stage because of the ease with which this alkine dehydrates to stilbazole. If it is desired to stop at the alkine stage, it is suggested that the picoline be condensed with the benzaldehyde in the presence of water and that no condensing agent be used (138). The yield of alkine is increased by replacing a hydrogen of the methyl group of 2-picoline with magnesium and condensing the resulting 2-picolyl magnesium chloride with benzaldehyde (100).

Stilbazoles are the products usually obtained by the condensation of aromatic aldehydes and 2-picoline and 4-picoline. In general, the reaction is carried out by refluxing a solution of the aromatic aldehyde, the picoline, and acetic anhydride (138)(28)(60). Yields above 90% are not uncommon (71).

Since 3-picoline does not condense with aldehydes, 3-stilbazole cannot be made as are the 2- and 4-stilbazoles. 3-Stilbazole has been made by condensing 3-pyridyl acetic acid with benzaldehyde and then decarboxylating the resulting beta-phenyl-alpha-3-pyridyl acrylic acid (12). The methyl iodide quaternary of 3-picoline condenses with benzaldehyde in the presence of piperidine to give a small yield of the alkine (75).

Benzaldehyde condenses with 2,4-lutidine by adding a molecule of the aldehyde to each of the methyl groups to give 2,4-distyrylpyridine (60)(110) and also to give 2-styryl-4-methylpyridine (42). 2,6-Lutidine condenses with benzaldehyde to give a mixture of 2-methyl-6-styrylpyridine and 2,6-distyrylpyridine (70).

The hydrogens of the methyl groups in 2- and 4-picoline are comparable in reactivity to those of the methyl ketones. And, as would be expected, the Mannich reaction applies to these compounds. 2-Picoline condenses with formaldehyde and diethylamine to give 2-(beta-diethylaminoethyl)pyridine (145).

Formaldehyde in an alkaline medium reacts with 3-hydroxypyridine to yield 2-hydroxymethyl-3-hydroxypyridine (146); 2-methyl-5-hydroxypyridine gives 2-methyl-5-hydroxy-6-hydroxymethylpyridine, indicating the influence of the hydroxyl group is more dominant than that of the

alpha methyl group (147). With Benzaldehyde, 2-methyl-3-hydroxypyridine in an acid medium gives 2-styryl-3-hydroxypyridine (75).

Bibliography

1. Abramovitch, Giam-Choo Seng, and Notation, *Can. J. Chem.* 38, 761-71 (1960)
2. Abramovitch and Notation, *Can. J. Chem.* 38, 1445-8 (1960)
3. Adams and Reifschneider, *J. Am. Chem. Soc.* 79, 2236-39 (1957)
4. Adams and Schrecker, *J. Am. Chem. Soc.* 71, 1186-95 (1949)
5. Adkins, Kuick, Farlow, and Wojcik, *J. Am. Chem. Soc.* 56, 2425-28 (1934)
6. Albert, *J. Chem. Soc.* 1951, 1376
7. Allen and Wolf, *Organic Syntheses*, 30, 3-4 (1950)
8. Arata and Achuva, *C.A.* 53, 10211 (1959); *Yakugaku Zasshi* 79, 108-10 (1959)
9. Arens and Wibaut, *Rec. trav. chim.*, 61, 59-68 (1942)
10. Bain and Saxton, *J. Chem. Soc.*, 1961, 5216-23
11. Bak and Christensen, *C.A.* 49, 4640-1 (1955); *Acta chem. scand.* 8, 390 (1954)
12. Beard and Katritzky, *Rec. trav. chim.* 78, 592 (1959)
13. Bengtsson, *Acta Chem. Scand.* 9, 832-6 (1955)
14. Berson and Cohen, *J. Am. Chem. Soc.* 78, 416-8 (1956)
15. Black, Depp, and Corson, *J. Org. Chem.* 14, 14-21 (1949)
16. Bodalski and Michalski, *Bull. acad. polon. sci., Ser. sci. chim.* 8, 217-18 (1960); *C.A.* 55, 18721 (1961)
17. Boekelheide and Feely, *J. Org. Chem.* 22, 589-92 (1957)
18. Boekelheide and Lehn, *J. Org. Chem.* 26, 428-30 (1961)
19. Bohlmann, *Chem. Ber.*, 85, 390-4 (1952)
20. Borsche and Hartman, *Ber.* 73, 839-42 (1940)
21. Bowden and Green, *J. Chem. Soc.* 1954, 1795-8
22. Bradlow and Vanderwerf, *J. Org. Chem.* 16, 73-83 (1951)
23. Brown and Murphey, *J. Am. Chem. Soc.* 73, 3308-12 (1951)
24. Buehler, Harris, and Arendale, *J. Am. Chem. Soc.* 72, 4953-5 (1950)
25. Callighan and Wilt, *J. Org. Chem.* 26, 4912-14 (1961)
26. Carelli, *C.A.* 56, 4720-1 (1962); *Ann. Chim. (Rome)* 51, 713-18 (1961)
27. Cathcart and Reynolds, *J. Am. Chem. Soc.* 73, 3504 (1951)
28. Chiang and Hartung, *J. Org. Chem.* 10, 21-25 (1945)
29. Chichibabin, *Bull. Soc. Chim. (5)* 3, 1607-32 (1936)
30. Cislak, *Ind. & Eng. Chem.* 47, 800-2 (1955)
31. Cislak, U. S. Patent 2,735,851, February 21, 1956
32. Cislak, U. S. Patents 2,868,294 and 2,868,295, January 13, 1959
33. Cislak, Karnatz, and Kelley, U. S. Patent 2,505,461, April 25, 1950
34. Cislak and Kranzfelder, U. S. Patent 2,456,379, December 14, 1948
35. Cislak and Sutherland, U. S. Patent 2,512,789 (1950)
36. Cislak and Wheeler, U. S. Patent 2,300,741, November 3, 1942
37. Cislak and Wheeler, U. S. Patent 2,437,938, March 16, 1948
38. Cislak and Wheeler, U. S. Patent 2,456,380, December 14, 1948
39. Cislak and Wheeler, U. S. Patent 2,522,163, September 12, 1950
40. Cislak and Wheeler, U. S. Patent 2,786,846, March 26, 1957
41. Clark-Lewis and Singh, *J. Chem. Soc.* 1962, 2379-82.
42. Clemo and Gourlay, *J. Chem. Soc.* 1938, 478-79
43. Clemo and Koenig, *J. Chem. Soc.* 1949, Suppl. Issue No. 1, S231-2
44. Clemo and Swan, *J. Chem. Soc.* 1948, 198-200
45. Davies and McGee, *J. Chem. Soc.* 1950, 678-80
46. Den Hertog and Overhoff, *Rec. trav. Chim.* 49, 552-6 (1930)
47. Evans and Brown, *J. Org. Chem.* 27, 1329-36 (1962)
48. Evans and Brown, *J. Org. Chem.* 27, 1665-7 (1962)
49. Feely and Beavers, *J. Am. Chem. Soc.* 81, 4004-7 (1959)
50. Feider and Pitre, *C.A.* 52, 379 (1958); *Gazz. chim. ital.* 86, 386-91 (1956)

51. Ferles, C.A. 52, 13724-5 (1958); Chem. Listy 52, 668-73 (1958)
52. Ferles, C.A. 52, 13724-5 (1958); Chem. Listy 52, 674-81 (1958)
53. Ferrari and Marcon, C.A. 53, 7162 (1952); Farmaco (Pavia) Ed. Sci. 13, 485-9 (1958)
54. Finkelstein and Elderfield, J. Org. Chem. 4, 365-75 (1939)
55. Frank and Mosher, J. Org. Chem. 24, 196-8 (1959)
56. Frank and Smith, Organic Syntheses 27, 38-40 (1947)
57. Gardner, Wenis, and Lee, J. Org. Chem. 22, 984-6 (1957)
58. Gautier, Marszak, and Miocque, Bull. soc. chim. France, 1958, 415-18
59. Ghigi, Ber., 75, 131b-23 (1942)
60. Gilman and Karmas, J. Am. Chem. Soc. 70, 2809-10 (1948)
61. Hamilton and Adams, J. Am. Chem. Soc. 50, 2260-3 (1928)
62. Hardegger and Nikles, Helv. Chim. Acta, 40, 2421-7 (1957)
63. Hayashi, Yamanoka, and Shimizia, Chem. Pharm. Bull, (Tokyo) 6, 323 (1958); C.A. 53, 375-6 (1959)
64. Heinert and Martell, J. Am. Chem. Soc. 81, 3933-43 (1959)
65. Henke, Benner, and Scott, U. S. Patent 2,267,734, December 30, 1941
66. Henze, Ber. 67, 750-3 (1934)
67. Hertog and Combe, Rec. trav. chim., 70, 581-90 (1951)
68. Hnevsova and Ernest, C.A. 54, 13115 (1960); Collection Czech. Chim. Communs. 25, 748-55 (1960)
69. Hoffmann-LaRoche, Swiss Patent 286,108, February 2, 1953; C.A. 48, 8271 (1954)
70. Horak and Stanek, C.A. 45, 6201 (1951); Chem. Listy 44, 310-11 (1950)
71. Horwitz, J. Org. Chem. 21, 1039-41 (1956)
72. Hudlicky and Mares, C.A. 52, 4628 (1958); Chem. Listy 51, 1875-9 (1957)
73. Husse and Schroedel, C.A. 51, 11341 (1957); Angew. Chem. 68, 438-9 (1956)
74. Iida, J. Pharm. Soc. Japan, 82, 150-56 (1962)
75. Jerchel, Fischer, and Thomas, Chem. Ber. 89, 2921-33 (1956)
76. Jerchel, Heider, and Wagner, C.A. 53, 5263-4 (1959); Ann. 613, 153-70 (1958)
77. Jerchel, Heider, and Wagner, Ann 613, 180-4 (1958)
78. Jones, J. Chem. Soc. 1950, 1392-7
79. Jones and Kornfeld, J. Am. Chem. Soc. 73, 107-9 (1951)
80. Jones and Lindsey, J. Chem. Soc. 1952, 3261-4
81. Karrer and Mainoni, C.A. 46, 6127 (1952); Helv. chim. acta 34, 2151-4 (1951)
82. Katritzky, J. Chem. Soc. 1956, 2404-8
83. Katritzky, Randall, and Sutton, J. Chem. Soc. 1957, 1769-75
84. Kirpal and Reiter, Ber. 58, 699-701 (1925)
85. Kitchen and Hanson, J. Am. Chem. Soc., 73, 1838-9 (1951)
86. Knight and Shaw, J. Chem. Soc., 1938, 682-3
87. Koenigs and Greiner, Ber. 64, 1049-56 (1931)
88. Kovacs and Vajda, Chem. & Ind. 1959, 259; C.A. 57, 5892 (1962)
89. Kulka, J. Am. Chem. Soc., 68, 2472-3 (1946)
90. Ladenburg, Ber. 17, 156 and 386-91 (1884)
91. Lee and Swan, J. Chem. Soc. 1956, 771-5
92. Leffler in Organic Reactions, Adams, Ed. John Wiley and Sons, Inc. New York, 1942, Vol. I, pp 91-104
93. Leis and Curran, J. Am. Chem. Soc. 67, 74-81 (1945)
94. Lettre, Jungmann, and Salfeld, Chem. Ber. 85, 397-407 (1952)
95. Lochte and Cheavens, J. Am. Chem. Soc. 79, 1667-9 (1957)
96. Lukes and Galik, Chem. Listy 51, 2319-24 (1957); C.A. 52, 6347 (1958)
97. Maier-Bode, Ber. 69, 1534-7 (1936)
98. Malan and Dean, J. Am. Chem. Soc. 69, 1797-8 (1947)
99. Marcot and Pollard, C.A. 53, 18029 (1959); Compt. rend. 248, 252-4 (1959)

100. Marekov, C.A. 52, 18418 (1958); *Comp. rend. acad. bulgare sci.* 9, 35-8 (1956)
101. Marion and Cockburn, *J. Am. Chem. Soc.*, 71, 3402-4 (1949)
102. Marvel and Lazier, *Organic Syntheses, Coll. Vol. I*, 93-95 (1932)
103. Mathes and Sauermilch, *Ber.* 87, 1868-9 (1954)
104. Mathes and Sauermilch, *Ber.* 89, 1515-21 (1956)
105. Mathes and Sauermilch, *Ber.* 93, 286-88 (1960)
106. Mathes, Sauermilch, and Klein, *Ber.* 81, 452-58 (1951)
107. Mathes, Sauermilch, and Klein, *Ber.* 86, 584-88 (1953)
108. Maxted, *J. Soc. Chem. Inc.* 67, 93-97 (1948)
109. Melichar, *Chem. Ber.* 88, 1208-10 (1955)
110. Michalski and Studnorski, *Chem. Tech. (Berlin)* 9, 96-7 (1957)
C.A. 51, 10530 (1957)
111. Micovic and Mihailovic, *Rec. trav. chim.* 71, 972-6 (1952)
112. Mosher and Tessieri, *J. Am. Chem. Soc.*, 73, 4925-7 (1951)
113. Mosher, Turner, and Carlsmith, *Organic Syntheses* 33, 79-81 (1953)
114. Murray and Langham, *J. Am. Chem. Soc.* 74, 6289-90 (1952)
115. Ochiai, *J. Org. Chem.* 18, 534-51 (1953)
116. Ochiai and Okuda, *J. Pharm. Soc. Japan*, 70, 156-61 (1950); C.A. 44, 5878 (1950)
117. Osuch and Levine, *J. Am. Chem. Soc.* 78, 1723-5 (1956)
118. Peterson, *J. Org. Chem.* 25, 565-9 (1960)
119. Pines, *J. Am. Chem. Soc.* 81, 2568 (1959)
120. Plazek, *Ber.* 72, 577-81 (1939)
121. Plazek and Kozdrojowna, *Roczniki Chem.* 25, 509-13 (1951) C.A. 48, 5863 (1954)
122. Prasad and Swan, *J. Chem. Soc.* 1958, 2024-38
123. Prill and McElvain, *Organic Syntheses, Coll. Vol. II*, 419-21 (1943)
124. Profft, *Chem. Tech. (Berlin)* 8, 378-82 (1956); C.A. 51, 4374 (1957)
125. Profft and Richter, C.A. 54, 11019 (1960); *Wiss. Z. Tech. Hochsch. Chem. Leuna-Merseburg* 2, 85 (1959-60)
126. Profft and Schneider, *Arch. Pharm.* 289, 99-104 (1956); C.A. 51, 402 (1957)
127. Reynolds and Kenyon, *J. Am. Chem. Soc.* 72, 1593-6 (1950)
128. Rieger, U. S. Patent 2,502,174, March 28, 1950
129. Risaliti and Lolli, *Farmaco (Pavia) Ed. sci.*, 12, 705-11 (1957); C.A. 52, 11038 (1958)
130. Robinson, *J. Org. Chem.* 16, 1911-19 (1951)
131. Rubstov, Nikiskaya, and Usovskaya, *Zhur. Obshchei, Khim.* 25, 2453-7 (1955); C.A. 50, 9401 (1956)
132. Sato, *Chem. & Pharm. Bull. (Japan)* 7, 241-7 (1959)
133. Sato, Inoue, and Kitamura, C.A. 45, 2940 (1951); *J. Pharm. Soc. Japan* 63, 319-25 (1943)
134. Schwarz, C.A. 53, 18970 (1957); *Ger.* 1,010,524, June 19, 1957
135. Seide, *Ber.* 57, 791-6 (1924)
136. Shaw, *J. Chem. Soc.* 125, 1930-4 (1924)
137. Shaw, *J. Chem. Soc.* 127, 215-6 (1925)
138. Shaw and Wagstaff, *J. Chem. Soc.* 1933, 77-79
139. Singer and McElvain, *J. Am. Chem. Soc.* 57, 1135-7 (1935)
140. Solomon, *J. Chem. Soc.* 1946, 934-6
141. Sugasawa and Kirisawa, *Pharm. Bull. (Japan)*, 3, 187-9 (1955); C.A. 50, 8636 (1956)
142. Taylor and Crovetti, *J. Org. Chem.* 19, 1633-40 (1954)
143. Toland, *J. Org. Chem.* 27, 869-72 (1962)
144. Tomisawa, *J. Pharm. Soc. Japan* 79, 1173-6 (1959)
145. Tseon, *Compt. rend.* 192, 1242 (1931); C.A. 25, 4270 (1931)
146. Urbanski, *J. Chem. Soc.* 1946, 1104-5
147. Urbanski, *J. Chem. Soc.* 1947, 132-4
148. Vaculik and Kuthan, C.A. 54, 18506 (1960); *Collection Czechoslov. Chem. Commun.* 25, 1591-5 (1960)

149. Wawzonek, Nelson, and Theien, J. Am. Chem. Soc. 74, 2894-6 (1952)
150. Wegler and Pieper, Chem. Ber. 83, 6-10 (1950)
151. wibaut and Hey, Rec. trav. chim. 72, 513-21 (1953)
152. wibaut, Kooyma, and Boer, Rec. trav. chim. 64, 30-4 (1945)
153. wibaut and Vromen, Rec. trav. chim. 67, 545-50 (1948)
154. wilbert, Reich, and Tenenbaum, J. Org. Chem. 22, 694-5 (1957)
155. woodward, Badgett, and Kaufman, Ind. Eng. Chem. 36, 544-6 (1944)
156. Ziegler and Zeiser, Ber. 63, 1847-51 (1930)

Tar Acid Extraction in a Rotating Disc Contactor

John V. Fisher, Johnstone S. Mackay, Rudolph J. Weiss

Pittsburgh Chemical Co., Pittsburgh 25, Pennsylvania

The extraction of coal tar acids from tar acid oils by means of caustic solutions was investigated in a 4 in. I.D. Rotating Disc Contactor extraction column. This investigation was one phase of a program directed towards the modernization of the coal tar processing plant at Pittsburgh Coke and Chemical Co. Subsequent changes in the economic picture for coal tar derivatives led to a cancellation of the projected modernization.

Two feed stocks from independent manufacturing sources each containing 14-16 wt.-% tar acids in neutral oil were employed in the test series. The extracting solution was fresh 9 wt.-% caustic in water. These represented the projected plant operating conditions near capacity operation. The tar acid in neutral oil system is chemically indeterminate. Tar acid is a generic name for a mixture of phenol, cresols, xylenols etc. Neutral oil is a mixture of methyl naphthalene, naphthalene, alkyl benzene etc. The acid-oil ratio and the individual constituent ratios are functions of the coal and the coking conditions. Wide variations were normally encountered using local feed stocks which variations were expected to be compounded when outside sources were employed as capacity operation was approached. The 14-16% acid content represented the maximum likely to be encountered over any extended period.

The study also covered the benzene-acetone-water system in order to provide a reference base for the column performance.

The performances of the RDC column are reported for both ternary systems. Certain aspects of the results must be viewed with caution. The measured relative changes in column performance with changes in the levels of the operating variables are believed to be accurate. However, uncertainties with respect to the tar acid equilibrium phase data and its interpretation coupled with the proximity of the operating line to the equilibrium line in these studies make the absolute values of the transfer stage height for this system rather doubtful.

Ternary phase equilibrium data have been published for the benzene-acetone-water system¹. No data concerning the tar acid oil-aqueous caustic system have been published. The detailed development of the ternary phase diagram for the tar acid oil-caustic system is not reported in this paper. However, some discussion of the approach and the results is essential to the evaluation of the results of the column tests.

Experimental

Absolute analytical techniques for both the tar acid content of, and the species distribution in the feed stock, have not been developed to the point where they are practical on a semi-routine basis. An infrared technique for measuring the

(1) Briggs, Comings, Ind. Engr. Chem. 35, 411 (1943).

concentration of the OH groups was developed which is believed to be fairly reliable². The total weight of acid is then calculated by using an arbitrary molecular weight which agrees with long term plant experience.

Tar acids in the caustic phase were determined by potentiometric titration with HCl to a pH of 8 in alcoholic solution.

The phase boundaries in part and the tie lines were obtained by mixing known weights of tar acid oil and 9 wt.% caustic and analysing the phases for acid distribution. The phase boundaries for a number of feed stocks obtained over a two month period were determined by cloud point titrations according to the method of Othmer³. The phase boundary locations for some four feed stocks and a synthetic feed of phenol in naphthalene were very similar over the temperature range between 80° and 95°. Tie line data scatter rather badly. No positive trend in slope or location as a result of composition or temperature differences could be seen. These data suggest that normal in-plant variations of feed composition should not affect the extraction column performance significantly. A generalized phase diagram was synthesized from all these data.

The column tests were carried out at a later date using two feed stocks which were not a part of the above study. However, the generalized diagram was assumed to apply to the new feeds. This approximation is reasonable in view of the similarity of phenol and cresols with respect to their reactions with caustic. This approximation may not be safe if the concentration of the caustic changed appreciably.

The basic unit of the Rotating Disc Contactor is a cylindrical cell baffled at each end and stirred by a centrally located solid disc. The cells of the pilot column had the following dimensions:

ID	4 in.
Height	2 in.
End baffles	4 in. OD, 3 in. ID, 1/8 in. thick
Rotating disc	2 1/4 in. D, 1/4 in. thick

The early benzene-acetone-water studies and the tar acid extraction studies were carried out in a glass walled column containing 24 cells. The later benzene-acetone-water studies were executed in a stainless steel column containing 36 cells.

Feed and effluent rates were controlled by rotameters. The effluent rates for the tar acid studies are based on continuous weight measurement. The solids precipitated during the acid extraction quickly rendered the rotameters nearly opaque and may have caused some sticking. As a result the use of weigh tanks was adopted.

The interface was sensed and controlled by means of capacitance probes. Solids deposition on the probes during the tar acid extraction forced some modification to the detector system. Two side mounted sight glass chambers were installed with the probe wires wrapped around the outside of the glass at the desired level. Alternate cleaning of the inside of the glasses every 20-30 minutes was found to be satisfactory. After the completion of the column studies a flow system interface detector was developed which was not subject to the problems associated with solids deposition.

The column and auxiliary equipment were steam traced throughout.

- (2) Kranc, M.F., Kadavy, D.J., Fassinger, H.M., Paper presented at A.C.S. National Meeting, New York, Sept. 8-13, 1957.
- (3) Othmer, D. F. et al, Ind. Engr. Chem. 33, 1240 (1941).

Discussion

The initial dispersion of the phases is generally achieved with the aid of a mixing nozzle. The intensity of interfacial turbulence is probably a maximum at this point. The mean droplet size may be a minimum. The excess mechanically induced turbulence dies out very rapidly and constant relative velocities are approached within a few inches up the column. Where only a few transfer units are attainable in the extraction column a significant fraction of the transfer can occur over this stage. Coalescence of the droplets begins almost immediately after leaving the nozzle.

Performance of the mixing system is one reason why a decrease in the height of a transfer stage is obtained with increasing total throughput when the number of total stages involved is small.

The coefficients of heat or mass transfer per unit area of interface have been shown to depend primarily on the settling rate of the droplets⁴. In stirred systems of this nature the accelerations imposed by the stirrer are a small fraction of that due to gravity. The rate of the stirrer in an RDC column or packing in a packed tower, is therefore the maintenance of a minimum droplet size spectrum. Stirring breaks down the droplets to a size spectrum which appears to depend on the power input per unit volume⁵. The coefficient of mass transfer per unit area falls off at a slower rate than the surface area increases with increasing stirrer speed⁴. That is, the quantity transferred across the interface per unit volume of stirred vessel increases with stirrer speed.

The importance of internal mixing within, and new surface generation on, the droplets as a result of coalescence and breakdown has not been resolved.

In many two phase systems, mixing of the phases at conditions other than equilibrium results in spontaneous interfacial turbulence. Spontaneous emulsification has been observed in a few systems. Random concentration fluctuations along the interface produce viscosity, density, and surface tension gradients. The surface expands and contracts locally. This movement couples with gravity induced convection currents due to density gradients to produce convection cells at the interface^{6,7}.

Spontaneous interfacial turbulence could be detected under certain conditions with both of the systems under study. The acetone-benzene-water system exhibited turbulence only when the conditions were such that the local solution density could be greater than the liquor density below it. Whether this restriction applies to the phenol in naphthalene-caustic system is not certain. The cell sizes appeared to lie between 0.03 and 0.1 in. diameter.

The mean drop size observed with the benzene-acetone-water system in the RDC column was not more than 3 times the size of the cells observed above at flat interfaces. At such low drop size to convection cell size ratios, development of these convection cells might not be possible.

The presence of surface active agents at the interface does not inhibit normal molecular diffusion. The intrinsic mass transfer coefficient involves both

- (4) Calderbank, P.H., Moo-Young, M.B., Chem. Engr. Sci. 16, 34 (1961).
- (5) Reman, G.H., Olney, R.B., Chem. Engr. Prog. 51, 141 (1955).
- (6) Sterling, C.V., Scriven, L.E., A. I. Ch. E. Journal 5, 514 (1959).
- (7) Orell, A., Westwater, J. W., Chem. Engr. Sci. 16, 137 (1961).

turbulent and molecular diffusion. This coefficient has been found to be reduced by the subclass of surface active agents which rigidize the interface^{4,8}.

Not generally realized is the ability of traces of solids to rigidize an interface. Distilled water exposed to the atmosphere for a few minutes develops a marked surface rigidity as a result of dust deposition⁹. One of the authors has noted the same phenomena with a number of organic compounds.

The benzene-acetone-water system is believed to be free of surface active agents and should be free of solids. However, the extent of the formation of solid precipitates at the interface during extraction of tar acids is such that major reductions in the mass transfer coefficient could have occurred.

The experimental values of the transfer stage height are shown on Figure 1 and 3 for the benzene-acetone-water system and on Figures 2 and 4 for the tar acid in oil-caustic system.

The only significant process variable appears to be the rotor speed both for the benzene-acetone-water and the tar acid in oil-caustic system. For the first system neither the direction of transfer of the acetone, the phase which was dispersed, nor the throughput had significant effects on the number of transfer stages. The flooding point did however depend on the phase which was dispersed, Figure 5. The same pattern was observed with the tar acid in oil-caustic system over the limited ranges studied.

These data suggest that such phenomena as interfacial turbulence, surface rigidity induced by solids accumulation at the interface, and the direction of mass transfer are not normally important variables. The volumetric mass transfer coefficient appears to depend primarily on the droplet size spectrum attainable in the system. However, capacity does depend on the particular phase which is dispersed.

The reader is again cautioned against using the HTS values obtained for the tar acid in oil-caustic system for conditions other than reported. The operating lines tend to pinch the equilibrium curve, Figure No. 4, and the exact location of the equilibrium curve is uncertain. Depending on the individual interpretation of the data, a 50% difference in the number of transfer stages may be obtained. However, the location of the curve, while it changes the numerical values, does not change the observed dependence of the numbers of the operating variables.

One of the surprising features of the RDC column performance is the absence of solids build-up within the stirred zones. The machine might be capable of handling slurries. In general, the Rotating Disc Contactor develops a high transfer rate per unit volume, and is insensitive to small upsets in the feed system, and can tolerate significant quantities of solids within the column proper.

(8) Davies, J. T., Mayers, G. R. A., Chem. Engr. Sci. 16, 55 (1961).

(9) Gurney, C. F., Phys. Rev. 26, 98 (1908):

RDC EXTRACTION COLUMN PERFORMANCE

24-36 CELLS 4 in.I.D. 2 in.H. STIRRER DISC 2 1/4 in.D





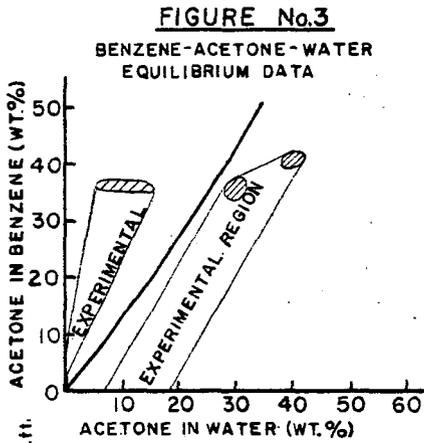


FIGURE No.4
NEUTRAL OIL-TAR ACIDS-9wt. % CAUSTIC SOLUTION EQUILIBRIUM DATA

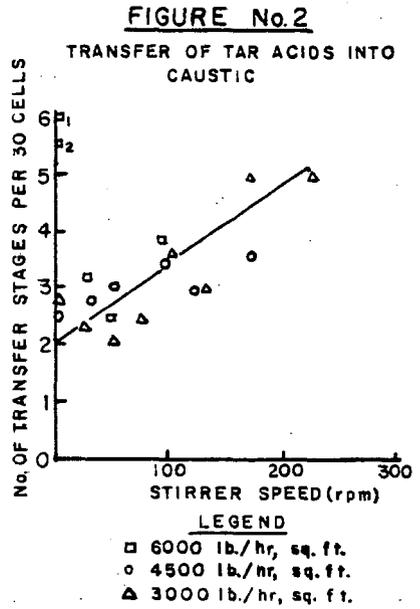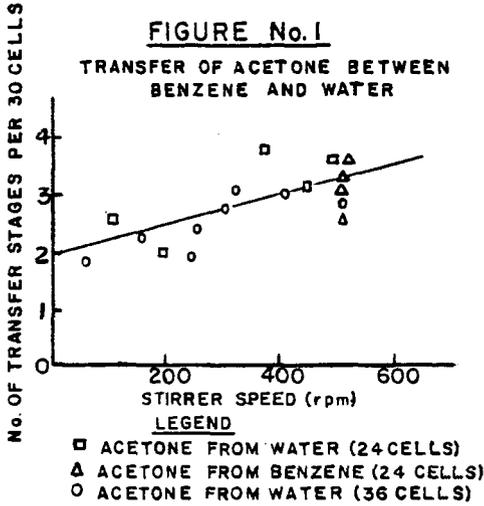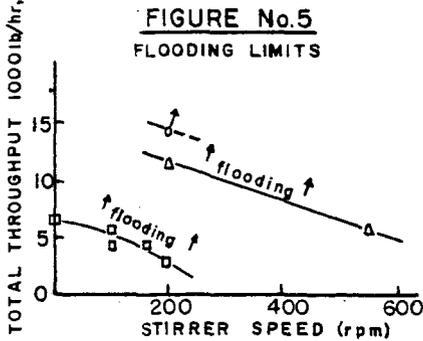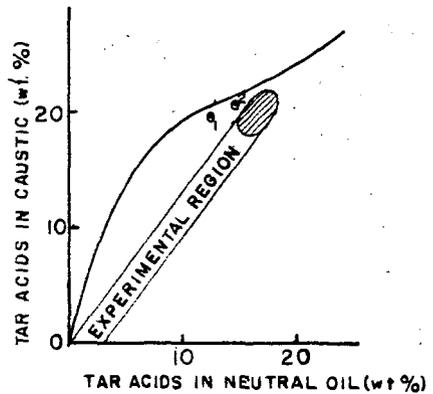

LEGEND

- TAR ACIDS DISPERSED PHASE
- △ BENZENE DISPERSED PHASE
- WATER DISPERSED PHASE

TABLE I

Extraction of Tar Acids with 9 wt.% NaOH in Water. Feed to Solvent ratio 1.9 to 2.1. Tar Acid Oil dispersed phase.

Column Temperature °C	Rotor Speed rpm	Total Throughput lb./hr., sq.ft.	Tar Feed wt.%	Acid Content Extract wt.%	NaOH in Solvent wt.%	No. of Transfer Stages
86	0	4700	14.9 [*]	19.4	9.7	2.0
87	25	4100	14.9 [*]	20.7	9.7	2.3
87	50	5000	14.9 [*]	21.0	9.7	2.5
85	75	4100	14.9 [*]	21.0	9.7	2.8
86	123	4100	16.8	20.2	9.2	2.5
88	165	4400	16.8	21.8	9.2	3.0
92	0	5800	12.5 [*]	20.5	9.2	5.0
88	0	5800	14.3 [*]	22.0	9.2	4.5
85	25	6300	16.8	23.0	9.8	2.7
85	50	6000	15.4	22.5	9.9	2.1
85	76	5800	17.4	23.5	9.6	3.2
86	0	3200	15.9	19.9	8.9	2.2
86	25	3400	15.9	19.5	8.8	2.1
84	50	3200	16.5	19.8	9.4	1.7
85	75	3300	16.5	21.0	9.2	2.1
85	100	3200	16.5	20.9	9.1	2.9
87	125	3100	16.5	20.3	9.1	2.5
85	171	3200	16.5	20.9	9.2	4.0
85	230	3100	16.5	22.2	9.5	4.0

* Synthetic of Wilton Still Tar Acid Oil and recovered Tar Acid from plant.

TABLE II

Transfer of Acetone between Benzene and Water at 23°C


Continuous Phase	Rotor Speed rpm	Phase Throughput		Acetone Content		Raffinate Water-Acetone Wt.%	Transfer Stages No.
		Benzene lb./hr., sq.ft.	Water-Acetone	Feed Water-Acetone Wt.%	Extract Benzene-Acetone Wt.%		
Benzene (24 cells)	100	350	650	40.5	41.9	15.1	2
	130	350	650	41.3	40.9	19.5	1.5
	375	350	650	39.6	41.8	11.5	3
	500	350	650	40.3	40.3	10.3	2.6
	500	700	1300	41.1	40.5	10.0	2.9
Water (24 cells)	500	Benzene-Acetone 470	Water 3000	Benzene-Acetone 37.8	Water-Acetone 4.2	Benzene-Acetone 0.1	2.8
	500	870	3000	36.5	9.5	1.3	2
	500	1430	3000	36.5	12	2.7	2.5
	500	1900	3000	36.5	15	2.7	3
	Water -Acetone (36 cells)	50	Benzene 1400	Water -Acetone 3500	Water -Acetone 30.0	Benzene -Acetone 33	Water -Acetone 12.3
145		1350	3300	30.0	33.7	12.5	2.5
245		1450	3400	31.0	33.0	13.5	2.0
320		1300	3700	29.0	35.0	10.7	3.5
245		1450	3400	31.0	35.0	12.0	2.8
305		1400	3750	30.0	36.5	12.0	3.2
390		1400	3500	29.0	34.5	10.0	3.5
500		1400	3750	29.0	34.5	8.4	3.7

HYDROGENATION OF DIELS-ALDER ADDUCTS OF ANTHRACENE

M. Kolobielski

Mellon Institute
Pittsburgh 13, Pennsylvania

The Diels-Alder condensation of anthracene with dienophiles is a reversible, temperature-dependent reaction.¹ At higher temperatures, usually above 200° C, the equilibrium is shifted in favor of the polycyclic hydrocarbon.² Pyrolysis of anthracene adducts has been suggested as a means of purifying anthracene or unsaturated alcohols.³ The low thermal stability of these adducts excludes their use as potential starting materials for the preparation of polymers. It was thought that hydrogenation of one or both benzene rings in these adducts would prevent the pyrolytic reversal reaction and produce compounds of higher thermal stability. This was found to be the case when two anthracene adducts, 9,10-dihydroanthracene-9,10-endo- α,β -succinic anhydride (I)⁴ and 11-methyl-9,10-dihydro-9,10-ethanoanthracene (VIII),⁵ were hydrogenated in the presence of ruthenium catalyst. Hydrogenation of adduct I under high pressure at 145-150° C in the presence of ruthenium-on-alumina catalyst led to the absorption of three moles of hydrogen per mole of I, producing 1,2,3,4,4a,9,9a,10-octahydroanthracene-9,10- α,β -succinic anhydride (II).

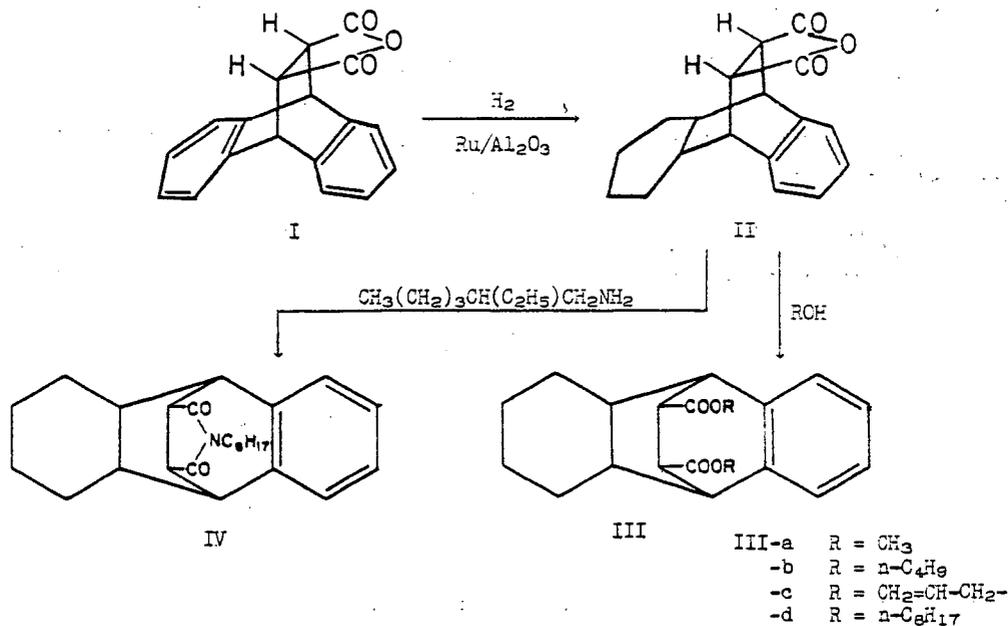


The infrared and ultraviolet spectra were consistent with structure II. The ultraviolet spectrum was that of an ortho-disubstituted benzene, and the infrared showed absorption bands characteristic of anhydride and ortho-disubstituted benzene groups.

Under the conditions employed, only one benzene ring was hydrogenated. The failure of the second benzene ring to undergo hydrogenation can be explained by steric effects as follows. The molecule of adduct I, which contains a meso-dihydroanthracene skeleton, is non-planar. It has been shown that 9,10-dihydroanthracene is bent about the line joining carbon atoms 9 and 10, each half of the molecule being planar but the two halves inclined to each other at an angle of approximately 145° .^{6,7} Assuming that addition of hydrogen to the benzene rings requires a flatwise adsorption of the unsaturated ring against the catalytic surface, it is likely that due to the bent configuration of adduct I and to the hindering effect of the bulky anhydride group, only one of the benzene rings can be hydrogenated.⁸ Inspection of the Godfrey molecular model of the adduct (I) confirms these expectations.

The hydrogenated adduct II, m.p. $145-165^\circ \text{C}$, was a mixture of stereoisomers, and no attempt was made to separate them and determine their configuration. Several derivatives of interest as potential plasticizers or pesticides, such as the diesters (III-a, b, c, d) and the N-substituted imide (IV), were prepared by standard procedures from II.

The foregoing results show that in the presence of a ruthenium catalyst, a selective hydrogenation occurred, resulting in the reduction of the aromatic ring but not affecting the succinic anhydride group of the adduct (I). In contrast, the anhydride group is attacked when a substituted succinic anhydride^{9,10} is hydrogenated in the presence of palladium or platinum catalyst, the products obtained being hydroxy-lactones, lactones, and β -methyl acids. The reduction of adduct I in the presence of Raney nickel at 160°C was also non-selective, providing a mixture of compounds. These were 1,2,3,4,4a,9,9a,10-octahydro-9,10-ethanoanthracene-11-methylol-12-carboxylic acid lactone (V), produced by an attack on the aromatic ring and the anhydride group; s-octahydroanthracene (VI); and succinic anhydride (VII).

Products VI and VII could have been formed either by hydrogenolysis or thermal decomposition of the adduct (I) followed by hydrogenation of the intermediates.

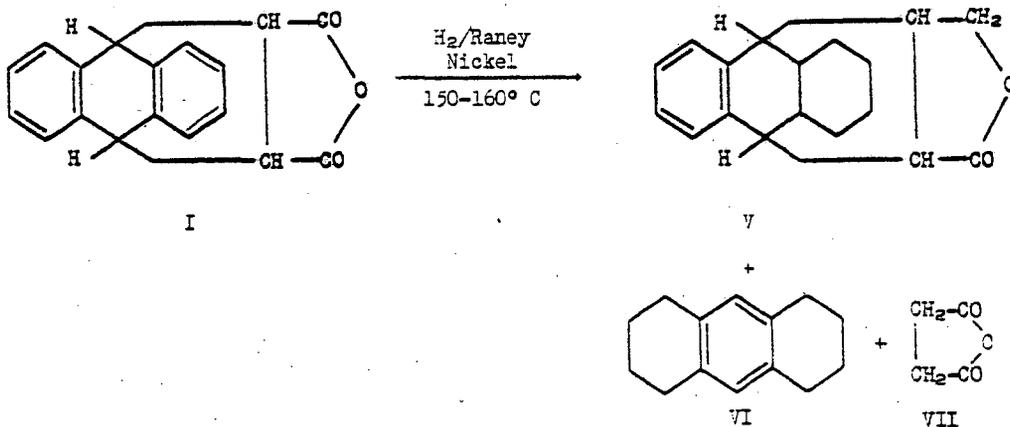

The lactone (V), m.p. $125-145^\circ \text{C}$, was a mixture of stereoisomers.

chloride were heated under reflux for 6 hours. After cooling, the precipitated diester was filtered, washed with water, and dried to yield 15.2 g. (77%) of III-a, m.p. 122-145° C, which crystallized from hexane-ethyl acetate (10:1), m.p. 145-147° C.

Anal. Calcd. for $C_{20}H_{24}O_4$: C, 73.14; H, 7.37.
Found: C, 73.49; H, 7.53.

Dibutyl 1,2,3,4,4a,9,9a,10-Octahydroanthracene-9,10- α,β -succinate (III-b)

A mixture of 1,2,3,4,4a,9,9a,10-octahydroanthracene-9,10- α,β -succinic anhydride (17 g.) and n-butyl alcohol saturated with anhydrous hydrogen chloride (50 ml.) at 5° C in benzene (50 ml.) was heated under reflux for 5 hours. The cooled solution was diluted with ether and washed with 5% sodium hydroxide, then with water. After removal of the solvents, the residue was distilled to yield 21 g. (85%) of the dibutyl ester, b.p. 220-225° C (1.5 mm.), n_D^{25} 1.5710.

Anal. Calcd. for $C_{28}H_{38}O_4$: C, 75.69; H, 8.30.
Found: C, 75.13; H, 8.62.

The procedure for the preparation of other diesters was as follows: A mixture of 1,2,3,4,4a,9,9a,10-octahydroanthracene-9,10- α,β -succinic anhydride (0.1 m.), alcohol (0.4 m.), toluene (75 ml.), and p-toluenesulfonic acid (0.5 g.) was heated at reflux until the theoretical amount of the water was collected in the trap. The cooled solution was washed with 5% sodium hydroxide, then with water, and, after removal of the solvent, the residue was distilled.

Diallyl 1,2,3,4,4a,9,9a,10-Octahydroanthracene-9,10- α,β -succinate (III-c)

b.p. 201-203° C (0.5 mm.), n_D^{25} 1.5420, 72% yield.

Anal. Calcd. for $C_{24}H_{28}O_4$: C, 75.76; H, 7.42.
Found: C, 75.86; H, 7.62.

Di-(n-octyl)-1,2,3,4,4a,9,9a,10-octahydroanthracene-9,10- α,β -succinate (III-d)

b.p. 245-248° C (0.4 mm.), n_D^{25} 1.5025, 88% yield.

Anal. Calcd. for $C_{34}H_{52}O_4$: C, 77.82; H, 9.99.
Found: C, 77.67; H, 10.01.

N-(2-Ethylhexyl)-1,2,3,4,4a,9,9a,10-octahydroanthracene-9,10- α,β -succinimide (IV)

To 28.2 g. (0.1 m.) of II was added 13.5 g. (0.105 m.) of 2-ethylhexylamine, and the reaction mixture was heated with stirring to 100° C and then set aside for 2 hours. It was then heated at 160-170° C for an additional 2 hours. After removal of water by distillation, the residue was vacuum distilled to give 29.9 g. (76%) of the imide (IV), b.p. 190-232° C (0.6 mm.). On cooling, the distillate crystallized to give a product melting at 58-66° C. A sample recrystallized from petroleum ether (30-60° C) melted at 72-74° C.

Anal. Calcd. for $C_{26}H_{35}NO_2$: C, 79.34; H, 8.96; N, 3.56.
Found: C, 79.36; H, 9.08; N, 3.30.

Hydrogenation of 9,10-Dihydroanthracene-9,10- α,β -succinic Anhydride in the Presence of Raney Nickel

An "Aminco" bomb was charged with 27.6 g. of the title adduct (I), 250 ml. of ethyl alcohol, and 10 ml. of Raney nickel catalyst, and hydrogen was admitted

under 1330 p.s.i. at 25° C. The bomb was shaken and heated at 160° C for 20 hours. The amount of hydrogen absorbed corresponded to about 13.5 moles of hydrogen per mole of the starting adduct. After cooling, the solution of the hydrogenated product was separated from the catalyst by filtration, and the catalyst was washed with ether. The filtrates were combined and the solvents removed, first at atmospheric pressure, then under vacuum. The residue, composed of an oil and a solid, was treated with ethyl alcohol. The solid, insoluble in alcohol, was separated by filtration to give 4.8 g. of s-octahydroanthracene. The filtrate, after removal of the solvent by distillation, gave 20 g. of an oil.

In order to separate acidic products from non-acidic, the oil (16 g.) was heated on a steam bath with 120 ml. of 10% sodium hydroxide solution for 2 hours, and, after cooling, ether was extracted. The non-acidic product, after elimination of ether, gave an additional 5.6 g. of s-octahydroanthracene. The total of s-octahydroanthracene isolated from the reaction mixture amounted to 10.4 g., or 56%. The alkaline solution was acidified with concentrated HCl, and the precipitated solid was separated by filtration. The aqueous filtrate, after ether extraction and removal of the solvent, afforded 0.4 g. of succinic acid. The precipitated solid (6.0 g.) was crystallized several times from ethyl acetate to yield 1,2,3,4,4a,9,9a,10-octahydro-9,10-ethanoanthracene-11-methylol-12-carboxylic acid lactone, m.p. 125-145° C. Infrared absorption maxima: 5.7 (lactone) and 13.0 μ (ortho-disubstituted benzene ring).

Anal. Calcd. for $C_{18}H_{20}O_2$: C, 80.56; H, 7.51.
Found: C, 79.74; H, 7.67.

Hydrogenation of 11-Methylol-9,10-dihydro-9,10-ethanoanthracene (VIII)

A mixture of 54 g. (0.228 m.) of 11-methylol-9,10-dihydro-9,10-ethanoanthracene (m.p. 105-108° C) (VIII),¹¹ 250 ml. of ethyl alcohol, and 4.0 g. of 5% ruthenium-on-alumina catalyst was placed in an autoclave, and hydrogen was admitted up to 1630 p.s.i. The vessel was shaken and heated for 6 hours at 150° C, after which the absorption of hydrogen ceased. The amount of hydrogen absorbed corresponded to about 3.8 moles of hydrogen per mole of adduct. After removal of the catalyst and solvent, the residue was distilled to yield 46 g. (84%) of a colorless oil, b.p. 150-175° C (0.6 mm.), n_D^{25} 1.5480, consisting of a mixture of 11-methylol-9,10-ethano-1,2,3,4,4a,9,9a,10-octahydroanthracene and 11-methylol-9,10-ethanoperhydroanthracene in an approximate ratio of 3 to 1.

Anal. Calcd. for $3(C_{17}H_{22}O) + C_{17}H_{28}O$: C, 83.89; H, 9.70; Molecular Weight, 244.
Found: C, 83.87; H, 10.20; Molecular Weight, 248.

(From determination of the hydroxyl content by acetylation method.)

Upon cooling, the oil partially solidified. The separated solid, 11-methylol-9,10-ethanoperhydroanthracene, crystallized from hexane, melted at 102-104° C. The infrared and ultraviolet spectra of the solid product showed complete disappearance of the aromatic ring.

Anal. Calcd. for $C_{17}H_{28}O$: C, 82.80; H, 11.36.
Found: C, 82.71; H, 11.59.

A thermal stability test of the hydrogenated adducts IX and IX + X was conducted as follows: Samples of the products were heated separately in air for 4 hours at 235-240° C. The products became colored, and according to infrared spectra, partial oxidation to the aldehydes occurred (infrared, 5.85 μ). However, no change in the carbon skeleton of the products was observed.

In a similar hydrogenation run, the crude product was separated from the catalyst, a fresh portion of the catalyst (4.0 g.) was added, and the mixture was

hydrogenated further at 160° C for an additional 17 hours. The reaction mixture contained approximately 30% of IX and 70% of X.

Acknowledgement

This work was carried out by the Coal Chemicals Research Project, sustained by the United States Steel Corporation, to whom the author is grateful for permission to publish these results.

References

1. For numerous references, see: M. C. Kloetzel in Organic Reactions, Vol. 4, John Wiley and Sons, Inc., New York City, 1948, Chapter 1.
2. a) W. E. Bachmann and M. C. Kloetzel, J. Am. Chem. Soc., **60**, 48 (1938).
b) R. Norman Jones, C. J. Gogek, and R. W. Sharpe, Can. J. Research, **26B**, 719 (1948).
3. C. W. Smith and R. T. Holm, U. S. Patent 2,761,883 (1956).
4. O. Diels and K. Alder, Ann., **486**, 191 (1931).
5. K. Alder and E. Windemuth, Chem. Ber., **71B**, 1939 (1938).
6. W. G. Ferrier and J. Iball, Chem. Ind., **1954**, 1296.
7. A. H. Beckett and B. A. Milley, Chem. Ind., **1955**, 146.
8. For a discussion of the steric hindrance on catalytic hydrogenation of polycyclic aromatic compounds, see: R. P. Linstead, W. Doering, S. B. Davis, P. Levine, and R. Whetstone, J. Am. Chem. Soc., **64**, 1985-2026 (1942); R. P. Linstead and R. R. Whetstone, J. Chem. Soc., **1950**, 1428.
9. F. Michael and W. Peschke, Chem. Ber., **75**, 1603 (1942).
10. R. McCrindle, K. H. Overton, and R. A. Raphael, Proc. Chem. Soc., **1961**, 313.
11. Prepared by the method of H. Krzikala and E. Woldan, German Patent 740,142 (1943)


REACTIONS OF 2,2'-BIPHENYLDICARBOXALDEHYDE

J. C. Hawthorne, E. L. Mihelic, M. S. Morgan, and M. H. Wilt

Mellon Institute
Pittsburgh 13, Pennsylvania


Although 2,2'-biphenyldicarboxaldehyde (I) was first reported by Kenner and Turner¹ in 1911 and later by other workers,² it has received only limited study because no simple method has existed for its preparation. Recent studies³ on the ozonolysis of phenanthrene have resulted in a relatively simple preparation of the dialdehyde from a potentially abundant starting material. The ready availability of this dialdehyde thus served as a practical stimulus to our investigation of its chemical behavior.

2,2'-Biphenyldicarboxaldehyde, I, was reacted with ammonia and primary amines to give Schiff-type bases. When I was heated with ammonium hydroxide, 5-hydroxy-5R-dibenz[c,e]azepine (II) was formed. The structure of II was assigned from elemental analysis and its infrared and NMR spectra. Infrared adsorption bands appeared at 6.15μ ($-N=C-$) and $5.2-5.3 \mu$ ($-C-H$). When I was reacted with benzylamine, methylamine, or aniline, 2,2'-bi(N-benzylbenzylideneimine) (IIIa), 2,2'-bi(N-methylbenzylideneimine) (IIIb), or 2,2'-bi(N-phenylbenzylideneimine) (IIIc) were the respective products. F. Mayer^{2a} reported IIIc from the reaction of N-(*o*-iodobenzylidene)aniline and "Naturkupfer C". Infrared adsorption bands for the $-N=C-$ linkage in these compounds occurred at 6.10 to 6.15μ .

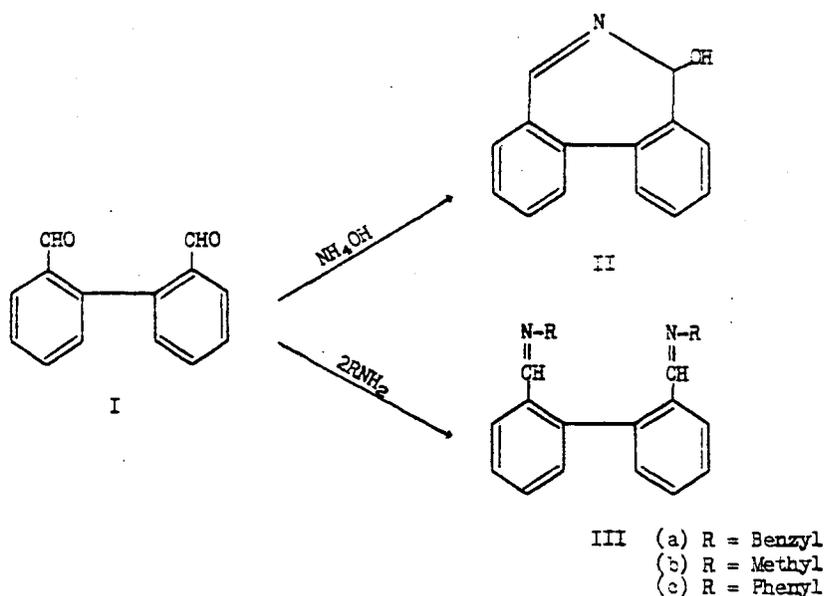

When II, IIIa, and IIIb were refluxed with aqueous sodium hydrosulfite, 6,7-dihydro-5H-dibenz[c,e]azepine (IVa) and the 6-substituted derivatives (IVb and IVc) were the respective products. Hydrosulfite reduction of 2,2'-biphenyldicarboxaldehyde monoxide also gave IVa.

Raney nickel catalyst was sufficiently active for the low-pressure hydrogenation of IIIc to IVd but not II to IVa. However, hydrogenation at higher pressure of an ethanolic solution of I and methylamine over Raney nickel yielded IVc. Low-pressure hydrogenation of I with benzylamine and methylamine over palladium catalyst gave the respective products, IVb and IVc. Only representative azepines were prepared by the various methods of reduction, and no attempt was made to study exhaustively the several different possible combinations.

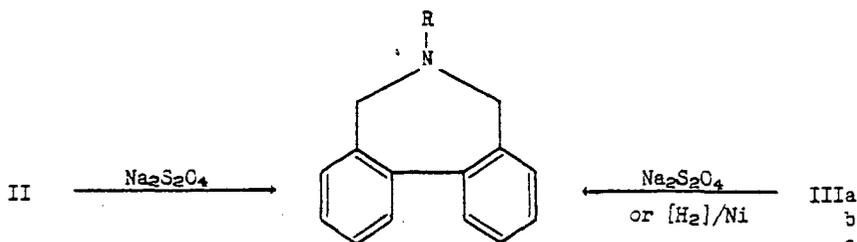

- IVa R = H (from II)
 b R = Benzyl (from IIIa)
 c R = Methyl (from IIIb)
 d R = Phenyl (from IIIc)

It was found unnecessary to isolate the Schiff bases prior to reduction by sodium hydrosulfite. By first refluxing I with the proper amine in methanol followed by treatment with the hydrosulfite, 6-allyl (V), 6-(3-dimethylaminopropyl) (VI), 6-(3-diethylaminopropyl) (VII), and 6-(2-aminoethyl)-6,7-dihydro-5H-dibenz[c,e]azepine (VIII) were also prepared.


With the exception of the latter three derivatives, these 6,7-dihydroazepines had been prepared by the reaction of *o,o'*-bis(bromomethyl)biphenyl with ammonia or with primary amines.⁴ A second method involved the reaction of diphenic anhydride with ammonia to give diphenamic acid. Diphenamic acid was cyclized to diphenimide, which was in turn reduced by lithium aluminum hydride to IVa.⁵

The present method of synthesizing these azepines is superior to previous methods because of the availability of the initial starting material, phenanthrene. The yields of the azepines, isolated as acid salts, ranged from 57 to 92%.

During the present work, a British patent⁶ was granted to Hoffman-LaRoche Company for the reductive amination of the dialdehyde to azepines. However, the use of sodium hydrosulfite in reductive amination of an aldehyde appears to be novel.


Randall and Smith⁷ screened the 6-substituted azepines for pharmacological activity and demonstrated their antiepinephrine properties. V was the most effective member of the group tested.

When a solution of IIIa in *N,N*-dimethylformamide was refluxed with copper chromite, dehydrocyclization occurred to yield 2,3-diphenyldibenz[f,h]quinoxaline (IX).⁸

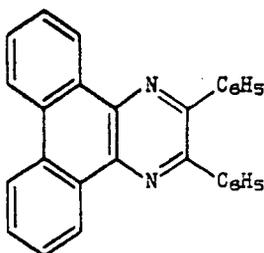

LX


Sparatore⁹ reacted I and *o*-phenylenediamine in methanol for 48 hours and obtained a glass, m.p. 52-57° C, for which he assigned the probable structure of 15H-dibenzo[*c,e*]benzimidazo[1,2-*a*]zepine (X). An uncharacterized hydrochloride melted at 260-265° C.

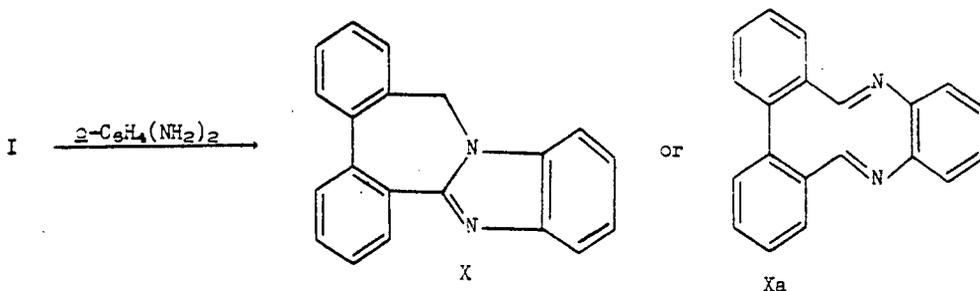


In our hands, the product from this reaction was obtained as a crystalline solid, m.p. 189-190° C, and was thought to exhibit polymorphism. Two different crystal forms were isolated which had different infrared spectra as Nujol mulls but the same spectrum in carbon disulfide and the same empirical formula. The NMR spectrum confirmed structure X rather than Xa.

A more convenient synthesis is to react the dialdehyde with *o*-phenylenediamine dihydrochloride in isopropyl alcohol, wherein the azepine precipitates presumably as the dihydrochloride monohydrate. The free base can be regenerated by treatment with alkali. The melting point of the hydrochloride is not definitive because it is believed to exist as the dihydrochloride, the monohydrochloride monohydrate, as well as the dihydrochloride monohydrate. Decomposition occurs during melting point determination, and the recorded melting point may be that of a decomposition product.


When II was treated with aqueous sodium bisulfite and then reacted with potassium cyanide, 5-cyano-5H-dibenzo[*c,e*]azepine (XI) was obtained. When the dialdehyde was reacted with ammonium chloride and potassium cyanide, XI was isolated in almost quantitative yield.

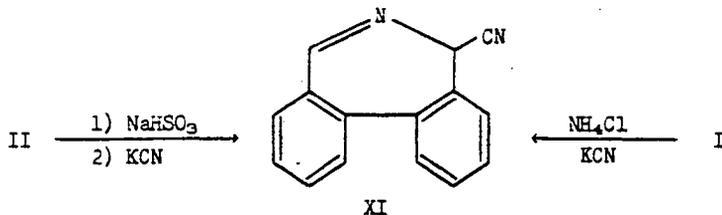


Acid hydrolysis of XI gave a product, 5H-dibenz[c,e]azepine-5-carboxylic acid (XII), which could not be sufficiently separated from inorganics for characterization. The acid complexed with metallic ions to give colored, water-insoluble chelates. The copper chelate (XIII) was characterized.

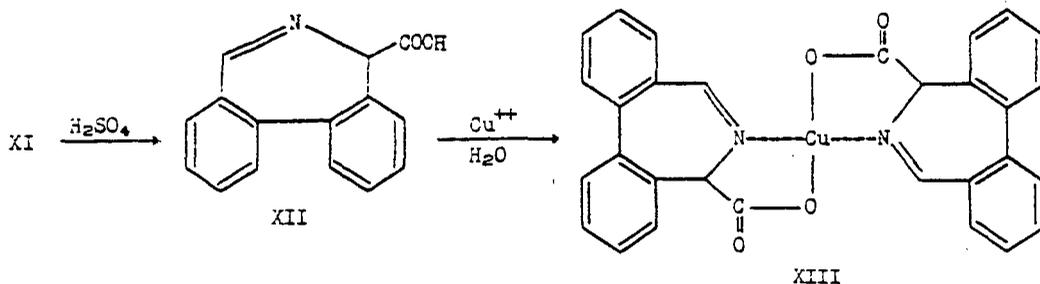


Nitrosation of IVa resulted in 6-nitroso-6,7-dihydro-5H-dibenz[c,e]azepine (XIV).

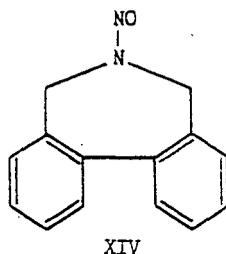


On acetylation of II by acetic anhydride, the 5-acetoxiazepine was not isolated, but rather 2-diacetoxymethyl-2'-acetyliminomethylbiphenyl (XV). The reaction might involve the isomeric structure, XVI.

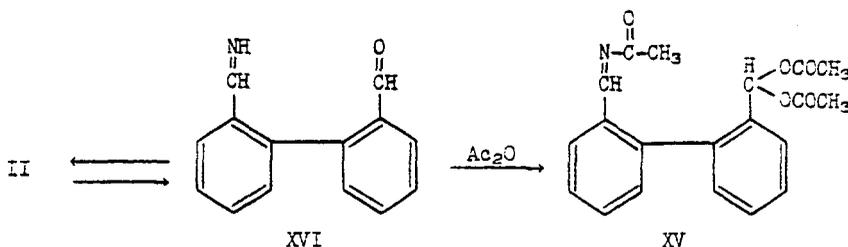


II was reacted with copper ion to give an insoluble complex, the structure of which could not be determined. However, II was reacted with ethylene glycol and cupric acetate to form 5,5'-ethylenedioxybis(5H-dibenz[c,e]azepine) (XVII). Monohydric alcohols gave oils which were not identified.

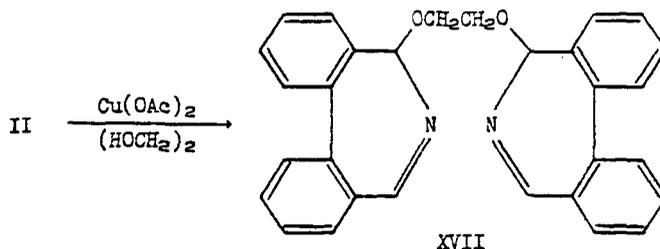

When I was reacted with two molecular equivalents of acetophenone in the presence of sodium hydroxide, a 35% yield of 2,2'-bis(1-hydroxy-2-benzoyl-ethyl)-biphenyl (XVIII) was isolated, and 2,2'-diphenide (XIX) was identified as a by-product. With an equal molecular ratio of reactants, a 35% yield of XVIII and a 57% yield of XIX, resulting from a competing Cannizzaro reaction, were isolated. Reaction of XVIII with acetic anhydride afforded 2-diacetoxymethyl-2'-(benzoylvinylene)biphenyl (XX).

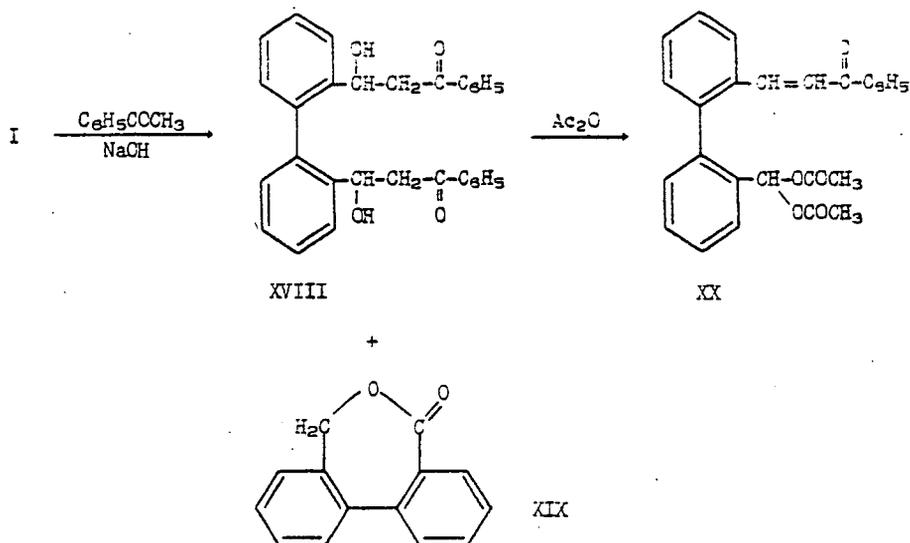

2,2'-Bis(hydroxymethyl)biphenyl (XXI) was obtained from I by either catalytic hydrogenation over Raney nickel or reduction by aluminum isopropoxide. The diol has been prepared by lithium aluminum hydride reduction of dimethyl diphenate¹⁰ and diphenic acid¹¹ or by lithium borohydride reduction of dimethyl diphenate.¹²

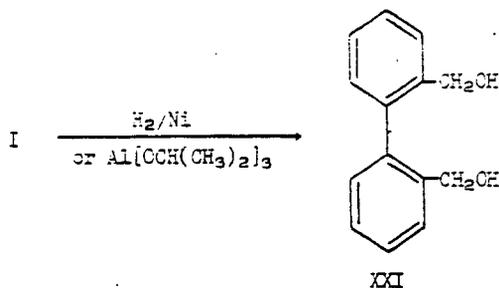

Mayer^{2a} had prepared 9,10-phenanthraquinone by a cyanide-catalyzed benzoin-type condensation of 2,2'-biphenyldicarboxaldehyde. It was found, however, that the intramolecular condensation was also light-catalyzed, although a peroxide, such as benzoyl peroxide, was necessary as an initiator.¹³ The choice of solvent had a marked effect upon the yield of the quinone (Table I).

Table I

Yield of Phenanthraquinone Obtained from Irradiation
of 2,2'-Biphenyldicarboxaldehyde in Various Solvents

<u>Solvent</u>	<u>Yield of Phenanthraquinone, %</u>	<u>Reaction Conditions</u>
t-Butyl Alcohol	5	Irradiation (Mercury Arc) for 48 hours at room temperature; 3 hours at reflux. One weight per cent benzoyl peroxide catalyst.
Acetic Acid	15	
Benzene	5	
Ethyl Ether	0	
Tetrahydrofuran	0	
Xylene	0	
Acetone	32	

The yield in acetone was increased from 32% to 50% by reflux for 72 hours. The remaining material was unreacted dialdehyde.

Experimental¹⁴

5-Hydroxy-5H-dibenz[c,e]azepine (II). Four grams of I was refluxed with 28% ammonium hydroxide (60 ml.) for 15 min. The mixture was cooled, and the colorless 5-hydroxy-5H-dibenz[c,e]azepine (3.7 g.; 97%), m.p. 126.8-128.8° C, was collected.

Anal. calcd. for $C_{14}H_{11}NO$: C, 80.36; H, 5.20; N, 6.70. Found: C, 80.59; H, 5.59; N, 7.00.

2,2'-Bi(N-benzylbenzylidenimine) (IIIa). I (2.1 g.; 0.01 mole), dissolved in toluene (30 ml.), was refluxed with benzylamine (2.20 ml.; 0.02 mole) for 15 min. The toluene was evaporated under reduced pressure, leaving an oil. Trituration with water afforded the solid 2,2'-bi(N-benzylbenzylidenimine) (3.86 g.; 99%), m.p. 94-97° C. Recrystallization from n-heptane gave crystals with a m.p. of 96-97° C.

Anal. calcd. for $C_{28}H_{24}N_2$: C, 86.56; H, 6.23; N, 7.21. Found: C, 86.53; H, 6.25; N, 7.21.

2,2'-Bi(N-methylbenzylidenimine) (IIIb). I (4.2 g.; 0.02 mole) was heated at 75-80° C in 15% aqueous monomethylamine (45 ml.) for 1 hr. with stirring. The colorless crystals (4.66 g.; 98%), m.p. 144-146° C, were collected. Recrystallization from n-heptane gave the pure 2,2'-bi(N-methylbenzylidenimine), m.p. 151.0-152.2° C.

Anal. calcd. for $C_{18}H_{16}N_2$: C, 81.32; H, 6.82; N, 11.86. Found: C, 81.32; H, 6.84; N, 11.84.

2,2'-Bi(N-phenylbenzylidenimine) (IIIc). I (2.1 g.; 0.01 mole) and aniline (2.04 g.; 0.021 mole) were refluxed in toluene (30 ml.) for 2 hr., with water being collected in a Dean-Stark trap. After evaporation of the toluene, the residue was dissolved in boiling n-heptane and the solution cooled. Light-yellow crystals (3.22 g.; 89%) of 2,2'-bi(N-phenylbenzylidenimine), m.p. 95.4-97.2° C, were obtained. Further recrystallization from n-heptane gave the pure compound, m.p. 97.6-99.0° C (lit., 98-99° C).^{2a}

6,7-Dihydro-5H-dibenz[c,e]azepine (IVa), Method A. II (3.0 g.) and sodium hydrosulfite (9.0 g.) were refluxed in water (100 ml.) for 30 min. On cooling the solution, colorless crystals separated and were collected. Additional material was separated by adding sodium chloride to the filtrate. The combined solids were dissolved in water (200 ml.) containing concentrated hydrochloric acid (20 ml.), and the solution was refluxed for 30 min. After concentrating the solution to 50 ml. and cooling,

6,7-dihydro-5H-dibenz[c,e]azepine hydrochloride (3.0 g.; 92%), m.p. 290.2-291.2° C (lit., 286-288° C),^{4b} separated.

Method B. I (2.1 g.; 0.01 mole) in methanol (30 ml.) was added to a solution of hydroxylamine hydrochloride (0.7 g.; 0.10 mole) in water (300 ml.). The precipitated 2,2'-biphenyldicarboxaldehyde monoxime (2.0 g.; 91%), m.p. 97-99° C, was collected.

Anal. calcd. for $C_{14}H_{11}NO_2$: C, 74.65; H, 4.92; N, 6.21. Found: C, 74.63; H, 4.96; N, 6.30.

The monoxime (1.0 g.; 0.005 mole) and sodium hydrosulfite (4.0 g.; 0.023 mole) were refluxed in water (50 ml.) for 30 min. The solid which separated on cooling was collected and refluxed for 30 min. in 10% hydrochloric acid (50 ml.). The solution was cooled and neutralized with sodium bicarbonate to precipitate 6,7-dihydro-5H-dibenz[c,e]azepine (0.7 g.; 31%), m.p. 88-93° C. Since the amine had not been reported as a solid, it was dissolved in ethyl ether, and the hydrochloride, m.p. 290-291° C, precipitated with hydrogen chloride. The infrared spectrum was identical to that of the product from Method A.

6-Benzyl-6,7-dihydro-5H-dibenz[c,e]azepine (IVb). I (2.1 g.; 0.01 mole) and benzylamine (1.6 ml.; 0.015 mole) were refluxed in toluene (15 ml.) for 1 hr. Water of reaction was collected in a Dean-Stark trap. The toluene was removed under an air blast, and the remaining oil, dissolved in methanol, was refluxed for 45 min. with sodium hydrosulfite (10 g.) in water (50 ml.). The methanol was distilled from the mixture and the cooled aqueous phase decanted from the semisolid material. The latter was refluxed with 3% hydrochloric acid (100 ml.) and the solution filtered. The cooled filtrate was made basic (pH 12) with sodium hydroxide. The precipitated oil was extracted into ether and the ether dried over potassium hydroxide pellets. Anhydrous hydrogen chloride was passed into the ether until the precipitation of 6-benzyl-6,7-dihydro-5H-dibenz[c,e]azepine hydrochloride hemihydrate (2.99 g.; 87%), m.p. 203-205° C (lit., 205° C),^{4c} was complete.

Methiodide. 6-Methyl-6-benzyl-6,7-dihydro-5H-dibenz[c,e]azepinium iodide, m.p. 186-188° C (lit., 188-189° C).^{4b}

6-Methyl-6,7-dihydro-5H-dibenz[c,e]azepine (IVc). I (4.2 g.; 0.02 mole) was heated at 85° C with stirring in 30% monomethylamine (25 ml.) for 30 min. The 2,2'-bi(N-methylbenzylidenimine) was collected and boiled with sodium hydrosulfite (12 g.) and water (75 ml.) for 30 min., allowing the volume to be reduced to 20 ml. When cool, the aqueous phase was decanted from the semisolid product. After washing and drying, this material was dissolved in n-heptane, and anhydrous hydrogen chloride was passed into the solution until precipitation of 6-methyl-6,7-dihydro-5H-dibenz[c,e]azepine hydrochloride (4.0 g.; 81%), m.p. 221-224° C, was complete.

Methiodide. 6,6-Dimethyl-6,7-dihydro-5H-dibenz[c,e]azepinium iodide, m.p. 287-289° C (lit., 287-288° C).^{4c}

Hydrogenation. A solution of I (0.0238 mole) and two molecular equivalents of the appropriate amine in ethanol (35 ml.) with the appropriate catalyst (10% on the dialdehyde) was subjected to hydrogenation in a low-pressure (50-60 p.s.i.g.) autoclave (Parr Instrument Company) or in a Magne-Dash autoclave (Autoclave Engineers) at higher pressures. After hydrogenation and removal of catalyst and solvent, the residue was refluxed with water (300 ml.) and sufficient hydrochloric acid to give pH 2. Any unreacted dialdehyde was collected by filtration, and the filtrate was concentrated to allow crystallization of the azepine hydrochloride.

Product	Catalyst	Hydrogen Pressure, p.s.i.g.	Temperature, °C	Time, hr.	Yield, %	m.p., °C
IVa	Raney Ni	850	75	17	51	287-290
IVa	5% Pt on Carbon	800	85	24	84	284-290
IVb	5% Pd on Carbon	60	50	18	91	202-208
IVc	5% Pd on Carbon	60	50	7	97	221-227

6-Phenyl-6,7-dihydro-5H-dibenz[c,e]azepine (IVd). 2,2'-Bi(N-phenylbenzylideneimine) (2.27 g.) in ethanol (50 ml.) was hydrogenated over Raney nickel (0.1 g.) at room temperature and 50 p.s.i. pressure for 7 hr. After removal of catalyst and evaporation of the ethanol, the semisolid product was crystallized from *n*-heptane to give 6-phenyl-6,7-dihydro-5H-dibenz[c,e]azepine (1.3 g.; 76%), m.p. 37-90° C. Upon recrystallization, the m.p. was 89.5-91.6° C.

Anal. calcd. for C₂₀H₁₇N: N, 5.17. Found: N, 5.38.

6-Allyl-6,7-dihydro-5H-dibenz[c,e]azepine (V). I (4.2 g.; 0.02 mole) and allylamine (3.1 ml.; 0.041 mole) were refluxed in methanol for 5 min. A solution of sodium hydrosulfite (15 g.) in water (75 ml.) was added to the cooled solution and the mixture refluxed for 30 min. After distilling over the methanol, the suspended oil was extracted into ethyl ether from the cooled aqueous phase. After drying the ether extract over potassium hydroxide, crude 6-allyl-6,7-dihydro-5H-dibenz[c,e]azepine hydrochloride (4.88 g.; 90%), m.p. 190-200° C, was precipitated by hydrogen chloride. Recrystallization from methanol-ethyl ether gave a 57% yield, m.p. 214-215° C (lit., 214-215° C).^{4a}

6-(3-Dimethylaminopropyl)-6,7-dihydro-5H-dibenz[c,e]azepine (VI). Dimethylaminopropylamine (Union Carbide Chemicals Company) (4.90 g.; 0.048 mole) was added to a solution of I (10 g.; 0.048 mole) in methanol (15 ml.). After 5 min., a solution of sodium hydrosulfite (30 g.) in water (330 ml.) was added and the solution refluxed for 1 hr. After removing two-thirds of the solvent by distillation, 10% aqueous sodium hydroxide (75 ml.) was added to the cooled solution to precipitate the azepine as an oil. The oil was extracted into ethyl ether. The ether phase was washed well with water, separated, and evaporated from the amine. The azepine was dissolved in isopropyl alcohol and reacted with excess hydrogen chloride. Crystalline 6-(3-dimethylaminopropyl)-6,7-dihydro-5H-dibenz[c,e]azepine dihydrochloride monohydrate, m.p. 227-230° C (dec.), separated from the solution. The yield was 10.9 g. (62%). This material was recrystallized from isopropyl alcohol to a m.p. of 231.2-232.3° C (dec.).

Anal. calcd. for C₁₉H₂₄N₂ · 2HCl · H₂O: C, 61.45; H, 7.60; Cl, 19.10; N, 7.55. Found: C, 61.29; H, 7.91; Cl, 18.64; N, 7.35.

6-(3-Diethylaminopropyl)-6,7-dihydro-5H-dibenz[c,e]azepine (VII). The 6-(3-diethylaminopropyl) derivative was prepared similarly to the previous compound. The dihydrochloride was too deliquescent for easy handling, so the diphosphate was prepared by dissolving the amine in methanol (40 ml.) and 85% phosphoric acid (8.5 g.). After crystallization was complete, 17.4 g. (70% yield) of 6-(3-diethylaminopropyl)-6,7-dihydro-5H-dibenz[c,e]azepine diphosphate monohydrate, m.p. 220-223° C (dec.) (lit., 220-222° C),⁹ was obtained. After recrystallization from ethanol-water, the pure compound melted at 221.5-223.5° C (dec.).

Anal. calcd. for C₂₁H₂₈N₂ · 2H₃PO₄ · H₂O: C, 48.27; H, 6.94; N, 5.36. Found: C, 48.82; H, 6.72; N, 5.19.

6-(2-Aminoethyl)-6,7-dihydro-5H-dibenz[c,e]azepine (VIII). Ethylenediamine (2.0 ml.; 0.02 mole) was added to a solution of I (4.2 g.; 0.02 mole) in methanol at room temperature. After 5 min., sodium hydrosulfite (10 g.) in water (50 ml.) was added and the mixture refluxed for 1 hr. After cooling, the aqueous phase was decanted and the residue refluxed with 5% aqueous sodium hydroxide (20 ml.) and toluene

(20 ml.) for a few minutes, dissolving the product in the toluene layer. The organic phase was separated, washed with water, and dried over potassium hydroxide pellets. The crude 6-(2-aminoethyl)-6,7-dihydro-5H-dibenz[c,e]azepine dihydrochloride (4.6 g.; 74%), m.p. 225-260° C, was precipitated by hydrogen chloride. Recrystallization from methanol gave the pure compound (3.9 g.; 63%), m.p. 268-270° C.

Anal. calcd. for $C_{16}H_{18}N_2 \cdot 2HCl$: C, 61.73; H, 6.47; N, 9.00. Found: C, 61.42; H, 6.29; N, 9.38.

2,3-Diphenyldibenz[f,h]quinoxaline (IX). I (5.0 g.) and benzylamine (5.1 g.) were refluxed in toluene (20 ml.) for 30 min. The water of reaction was collected in a Dean-Stark trap. After evaporation of the toluene, the residual oil, in N,N-dimethylformamide (35 ml.), was refluxed with powdered copper chromite (0.5 g.) for 2 hr. After removal of catalyst and solvent, the oily residue was triturated with methanol (15 ml.). The insoluble portion (1.5 g.), m.p. 260-265° C, was crystallized from benzene to give crystals (1.4 g.; 15%), m.p. 272-275° C (lit., 272° C).¹⁵

15H-Dibenzo[c,e]benzimidazo[1,2-a]azepine (X), Method A. A solution of I (2.10 g.) and *o*-phenylenediamine (1.08 g.) in methanol (40 ml.) remained at ambient temperature for 48 hr. After removal of the solvent by vacuum evaporation, a benzene (25 ml.) solution of the residual oil was absorbed on a column (2 x 16 cm.) of neutral alumina (Bio Rad AG7, 100-200 mesh). Elution with benzene gave 2.35 g. of a solid, m.p. 135-150° C. Recrystallization from benzene gave the product (1.37 g.; 50%), m.p. 169-190° C. Picrate, 279-281° C (dec.) (lit., 278-280° C).⁹

Anal. calcd. for $C_{20}H_{14}N_2$: C, 85.08; H, 4.99; N, 9.93. Found: C, 85.08; H, 5.34; N, 10.15.

NMR: The chemical shift value for the aliphatic protons was 5.03 τ (area ratio: aromatic to aliphatic protons, 5.5; theory, 6.0). A comparison of 1.82 τ for the methine proton in salicaldoxime and 6.38 τ for the methylene protons adjacent to the phenyl group in N,N,N',N'-tetrabenzylmethylene diamine¹⁶ led to the assignment of structure X rather than structure Xa.

The dialdehyde (2.10 g.) and *o*-phenylenediamine dihydrochloride (1.81 g.), dissolved in methanol (25 ml.) (a deep-red solution), were heated at reflux for 20 min. (red color was discharged). The volume was reduced by one-half and the mixture cooled. The crystals thus formed (2.36 g.), m.p. 252-256° C beginning at ambient temperature, were collected. If a sample were introduced into the melting point block at 240° C, the sample melted with gas evolution, solidified, and remelted at 252-256° C. The infrared spectrum contained peaks at 2.8 μ , 3.8 μ , and 4.3 μ . Thus the composition $X \cdot 2HCl \cdot H_2O$ was assigned. A sample of the above, heated at 140° C under vacuum, lost 4.34% in weight (theory for $1H_2O$: 4.83%) and now melted at 256-260° C. The 2.8 μ peak was now missing in the infrared spectrum of the dihydrochloride. $X \cdot 2HCl$ (1.0 g.) was recrystallized from isopropyl alcohol (25 ml.) and water (1 ml.). The crystals (0.5 g.) now melted at 263-267° C when placed in the apparatus at 240° C (m.p. 240-245° C from ambient temperature). The infrared spectrum now contained peaks at 2.3 μ and 3.8 μ but none at 4.3 μ , giving support to the composition $X \cdot HCl \cdot H_2O$.

Anal. calcd. for $C_{20}H_{14}N_2 \cdot HCl \cdot H_2O$: N, 8.32; Cl, 10.53. Found: N, 8.40; Cl, 10.40.

Method B. I (2.10 g.; 0.01 mole) and *o*-phenylenediamine dihydrochloride (1.81 g.; 0.01 mole) in isopropyl alcohol (50 ml.) were refluxed for 2 hr. The reaction mixture was cooled to 0° C and filtered. The residue (2.34 g.) was washed with cold isopropyl alcohol (10 ml.) and dried. The hydrochloride was dissolved in boiling 95% ethanol (30 ml.), and water (60 ml.) was added. The solution was made alkaline (pH 8) with aqueous 20% sodium hydroxide solution. The azepine base separated. After concentrating to one-half of the volume, the free base was collected. The yield was

1.99 g. (70%) of buff-colored product melting at 185-188° C. Crystallization from benzene gave rhomboid-like crystals, m.p. 186-189° C. Recrystallization from *n*-heptane gave mixed crystals, which on repeated recrystallization from *n*-heptane gave solely a needle form, m.p. 189-192° C.

Anal. calcd. for $C_{20}H_{14}N_2$: C, 85.08; H, 4.99; N, 9.93. Found: C, 85.26; H, 5.28; N, 10.19.

The needle form of X could be reconverted to the rhomboid form by dissolving in methanol, evaporating to an oily semisolid, and crystallizing from ethyl acetate. A few repetitions of this process gave solely the rhomboid form of X, m.p. 188-191° C.

Anal. calcd. for $C_{20}H_{14}N_2$: C, 85.08; H, 4.99; N, 9.93. Found: C, 85.24; H, 5.05; N, 9.85.

Comparison of the infrared spectra of the two forms in Nujol mulls showed sufficient dissimilarity to suggest polymorphism. The rhomboid form showed bands at 6.2 μ and 14.1 μ , which were absent in the needle form. The needle form showed bands at 10.8 μ and 11.9 μ , which were absent in the rhomboid form. Solution infrared spectra of the crystal forms in carbon bisulfide were identical, with no absorption at the above wave lengths.

5-Cyano-5H-dibenz[c,e]azepine (XI), Method A. A solution of II (6.3 g.; 0.03 mole) in acetic acid (30 ml.) was added to a solution of sodium bisulfite (3.1 g.; 0.03 mole) in water (75 ml.) and evaporated to dryness. A solution of potassium cyanide (1.9 g.; 0.03 mole) in water (30 ml.) was added to the residue dissolved in water (200 ml.). The solution was heated at 90° C for 1 hr. 5-Cyano-5H-dibenz[c,e]-azepine (5.0 g.; 82%), m.p. 150-152° C, precipitated. Recrystallization from ethyl acetate-*n*-heptane gave a m.p. of 154-156° C.

Anal. calcd. for $C_{15}H_{10}N_2$: C, 82.56; H, 4.62; N, 12.83. Found: C, 82.46; H, 5.21; N, 12.84.

Method B. A solution of I (21.0 g.; 0.1 mole) in methanol (300 ml.) was slowly poured into water (3 l.) containing ammonium chloride (16 g.; 0.33 mole) and potassium cyanide (6.5 g.; 0.01 mole). The solution was refluxed for 30 min. and cooled. The 5-cyano-5H-dibenz[c,e]azepine (20 g.; 99%), m.p. 150-153° C, was collected, washed with water, and dried.

5H-Dibenz[c,e]azepine-5-carboxylic Acid (XII). 5-Cyano-5H-dibenz[c,e]azepine (2.6 g.; 0.012 mole) was refluxed for 2 hr. in 67% sulfuric acid (50 ml.). The cooled reaction solution was poured into cold water (100 ml.) containing sodium hydroxide (34.6 g.). The pH of the solution was then adjusted to 6.8, and the solids, consisting of the product and sodium sulfate, which separated were collected and dried. 5H-Dibenz[c,e]azepine-5-carboxylic acid was extracted from the solid into hot methanol. Evaporation of the methanol gave 2.4 g. (87%) of the acid, m.p. 249-253° C. Since the acid was difficult to free of sodium sulfate, an analytical sample was prepared in the form of a water-insoluble copper chelate, XIII. A solution of copper sulfate pentahydrate (0.628 g.; 0.0025 mole) in water (25 ml.) was added to a solution of the acid (1.1 g.; 0.005 mole) in water (25 ml.). The lavender-colored complex (1.2 g.), m.p. 221-222° C, which precipitated was collected, washed, and dried.

Anal. calcd. for $(C_{15}H_{10}NO_2)_2Cu \cdot 2H_2O$: C, 62.98; H, 4.22; Cu, 11.10; H_2O , 6.29. Found: C, 63.10; H, 4.20; Cu, 10.77; H_2O , 6.12.

6-Nitroso-6,7-dihydro-5H-dibenz[c,e]azepine (XIV). Sodium nitrite (2.8 g.; 0.04 mole) was added to a solution of 6,7-dihydro-5H-dibenz[c,e]azepine hydrochloride (2.0 g.; 0.009 mole) in water (150 ml.) and hydrochloric acid (2.0 ml.). 6-Nitroso-6,7-dihydro-5H-dibenz[c,e]azepine (1.8 g.; 93%), m.p. 107-112° C (dec.), which crystallized from solution, was collected and dried.

Anal. calcd. for $C_{14}H_{12}N_2O$: C, 75.00; H, 5.36; N, 12.50. Found: C, 74.90; H, 5.55; N, 12.53.

2-Diacetoxymethyl-2'-acetylaminobiphenyl (XV). II (2.3 g.) was refluxed in acetic anhydride (50 ml.) for 30 min. After removing the excess acetic anhydride by vacuum distillation, the crude product (3.5 g.), m.p. 132-160° C, was washed with ethyl acetate (15 ml.). The undissolved material was 2-diacetoxymethyl-2'-acetylaminomethylbiphenyl (2.0 g.; 51%), m.p. 177-181° C. Recrystallization from ethyl acetate gave the pure compound, m.p. 184-186° C.

Anal. calcd. for $C_{20}H_{19}NO_5$: C, 67.97; H, 5.42; N, 3.98. Found: C, 67.81; H, 5.40; N, 4.26.

5,5'-Ethylenedioxybis(5H-dibenz[c,e]azepine) (XVII). Cupric acetate monohydrate (7.5 g.; 0.038 mole) was added to a solution of II (15 g.; 0.072 mole) in ethylene glycol (150 ml.) and water (30 ml.) and the mixture refluxed for 1.5 hr. Precipitated cupric hydroxide was removed by filtration and chloroform added to the filtrate. The chloroform was washed with 7% aqueous sodium bicarbonate (300 ml.) and then with water. After separation, the chloroform layer was evaporated to a volume of 200 ml., and n-heptane was added to cause crystallization of the crude product (11.7 g.; 71%), m.p. 227-232° C. Recrystallization from chloroform-acetone gave the pure compound, m.p. 244-246° C.

Anal. calcd. for $C_{30}H_{24}N_2O_2$: C, 80.96; H, 5.44; N, 6.30. Found: C, 80.79; H, 5.58; N, 6.26.

2,2'-Bis(1-hydroxy-2-benzoyl-ethyl)biphenyl (XVIII). A solution of sodium hydroxide (2.1 g.) in water (80 ml.) was added to a solution of I (4.6 g.; 0.022 mole) in ethanol (80 ml.). Acetophenone (5.2 g.; 0.044 mole) was added to the resulting solution over a 1-min. period. Colorless crystals soon formed and after only several minutes were collected, washed with ethanol (-5 to 0° C), and dried. This crude 2,2'-bis(1-hydroxy-2-benzoyl-ethyl)biphenyl weighed 5.5 g. (55%), m.p. 175-185° C. Recrystallization from methanol gave the pure compound, m.p. 238.5-239.0° C (dec.).

Anal. calcd. for $C_{30}H_{28}O_4$: C, 79.75; H, 5.81. Found: C, 79.74; H, 5.69.

The use of one molar equivalent of acetophenone as above gave 35% yield of XVIII and 57% yield of diphenide, m.p. 124-130° C (lit., 132° C).¹ The infrared spectrum was identical with that of authentic diphenide.

2-Diacetoxymethyl-2'-(benzoylvinylene)biphenyl (XX). 2,2'-Bis(1-hydroxy-2-benzoyl-ethyl)biphenyl (6.0 g.) was refluxed in acetic anhydride (100 ml.) for 1 hr. The acetic anhydride was removed by flash evaporation. The residual oil was dissolved in ethanol; from which, on concentration, 3.9 g. (70%) of crude 2-diacetoxymethyl-2'-(benzoylvinylene)biphenyl, m.p. 197-204° C, was obtained. Recrystallization from ethyl acetate gave the pure compound, m.p. 208.5-209.5° C.

Anal. calcd. for $C_{28}H_{22}O_5$: C, 75.30; H, 5.36; N, 19.34. Found: C, 74.92; H, 5.46; N, 19.62.

2,2'-Bis(hydroxymethyl)biphenyl (XXI), Method A. Aluminum isopropoxide (2.8 g.; 0.014 mole) was mixed with anhydrous isopropyl alcohol (100 ml.) containing I (4.2 g.; 0.02 mole). Acetone was distilled from the reaction through a 12-in. Vigreux column followed by the majority of the isopropyl alcohol. The cooled reaction mixture was poured into 20% hydrochloric acid (100 ml.). The precipitated 2,2'-bis(hydroxymethyl)biphenyl (4.01 g.), m.p. 92-100° C, was collected, washed, and dried. Recrystallization from benzene gave 2.79 g. (65%) of material melting at 109.4-109.8° C (lit., 112-113° C).¹⁰

Method B. I (15 g.) in ethanol (100 ml.) was hydrogenated (50 p.s.i.) over Raney nickel catalyst (0.5 g.) at 52° C for 18 hr. After removal of the catalyst by filtration, the ethanol was flash evaporated and the residue recrystallized from benzene to give 12.4 g. (81%) of 2,2'-bis(hydroxymethyl)biphenyl, m.p. 109.0-109.8° C.

9,10-Phenanthraquinone. A solution of I (2.1 g.; 0.01 mole) in acetone (100 ml.) containing benzoyl peroxide (0.02 g.) was refluxed for 72 hr. with continuous irradiation from a mercury vapor lamp (Hanovia Chemical and Manufacturing Company, Type 16200; filter removed) at a distance of 5-6 in. The solution was aerated at the rate of approximately 0.06 S.C.F.M. The acetone was flash evaporated, and a 50% yield of 9,10-phenanthraquinone, m.p. 196-206° C (lit., 206-207° C),¹⁷ was recovered by washing the residue with ethyl ether. The material dissolved in the ether was largely unchanged dialdehyde, identified by an infrared spectrum.

Other solvents—*i*-butyl alcohol, acetic acid, benzene, ethyl ether, tetrahydrofuran, and xylene—were employed similarly, except that the reaction time was 48 hr. at room temperature followed by 3 hr. at reflux.

Acknowledgement

The authors wish to express their gratitude to the United States Steel Corporation, Sponsor of the Coal Chemicals Research Project at Mellon Institute, for the permission to publish these results. The assistance of Mr. J. R. Harris in the obtaining of infrared spectra is gratefully acknowledged.

References

1. J. Kenner and G. Turner, Proc. J. Chem. Soc., 27, 92 (1911); J. Chem. Soc., 99, 2101 (1911).
2. (a) F. Mayer, Ber., 45, 1108 (1912).
(b) F. Weygand, G. Eberhardt, H. Linden, F. Schafer, and I. Eigen, Angew. Chem., 65, 525 (1953).
(c) O. Chapman and J. Meinwald, J. Org. Chem., 23, 162 (1958).
3. (a) W. J. Schmitt, R. J. Moriconi, and W. F. O'Connor, J. Am. Chem. Soc., 77, 5640 (1955).
(b) P. S. Bailey, J. Am. Chem. Soc., 78, 3811 (1956).
(c) P. S. Bailey, J. Org. Chem., 23, 1089 (1958).
(d) M. G. Sturrock, E. L. Cline, and K. R. Robinson, U. S. Patent 2,898,350.
4. (a) W. Wenner, J. Org. Chem., 16, 1475 (1951).
(b) W. Wenner, J. Org. Chem., 17, 1451 (1952).
(c) W. Wenner, U. S. Patent 2,619,484, November 25, 1952.
5. R. A. Schmidt and W. Wenner, U. S. Patent 2,693,465, November 2, 1954.
6. British Patent 860,907, February 15, 1961.
7. L. O. Randall and T. H. Smith, J. Pharmacol. Exptl. Therap., 103, 10 (1951).
8. J. O. Hawthorne and E. L. Mihelic, U. S. Patent 2,988,549, June 13, 1961.
9. F. Sparatore, Ann. Chim., 49, 2102 (1959).
10. D. M. Hall, M. S. Lesslie, and E. E. Turner, Nature, 163, 537 (1949).
11. A. J. Weinheimer, W. S. Kanter, and C. R. Hauser, J. Org. Chem., 18, 801 (1953).

12. G. Wittig, P. Davis, and G. Koenig, Chem. Ber., 84, 627 (1951).
13. E. L. Mihelic, U. S. Patent 2,930,742, March 29, 1960.
14. Analyses are by the Analytical Chemistry Section, Mellon Institute, and the Galbraith Laboratories, Knoxville, Tennessee. All melting points are uncorrected. 2,2'-Biphenyldicarboxaldehyde was prepared by the method of P. S. Bailey.^{3b}
15. M. P. Bui-Hoi and P. Jacquignon, Compt. Rend., 226, 2155 (1948).
16. NMR Spectra Catalog, Varian Associates, Palo Alto, California (1962); Spectra 136 and 365, respectively.
17. B. Helferich, E. N. Mulcahy, and H. Zeigler, Chem. Ber., 87, 235 (1954).